

Solutions Manual for

Advanced Mechanics of Materials and Applied Elasticity

Fifth Edition

Ansel C. Ugural
Saul K. Fenster



PRENTICE
HALL

Upper Saddle River, NJ • Boston • Indianapolis • San Francisco
New York • Toronto • Montreal • London • Munich • Paris • Madrid
Capetown • Sydney • Tokyo • Singapore • Mexico City

The author and publisher have taken care in the preparation of this book, but make no expressed or implied warranty of any kind and assume no responsibility for errors or omissions. No liability is assumed for incidental or consequential damages in connection with or arising out of the use of the information or programs contained herein.

Visit us on the Web: InformIT.com/ph

Copyright © 2012 Pearson Education, Inc.

This work is protected by United States copyright laws and is provided solely for the use of instructors in teaching their courses and assessing student learning. Dissemination or sale of any part of this work (including on the World Wide Web) will destroy the integrity of the work and is not permitted. The work and materials from it should never be made available to students except by instructors using the accompanying text in their classes. All recipients of this work are expected to abide by these restrictions and to honor the intended pedagogical purposes and the needs of other instructors who rely on these materials.

ISBN-10: 0-13-269049-7
ISBN-13: 978-0-13-269049-2

CONTENTS

Chapter 1	Analysis of Stress	1–1
Chapter 2	Strain and Material Properties	2–1
Chapter 3	Problem in Elasticity	3–1
Chapter 4	Failure Criteria	4–1
Chapter 5	Bending of Beams	5–1
Chapter 6	Torsion of Prismatic Bars	6–1
Chapter 7	Numerical Methods	7–1
Chapter 8	Axisymmetrically Loaded Members	8–1
Chapter 9	Beams on Elastic Foundations	9–1
Chapter 10	Applications of Energy Methods	10–1
Chapter 11	Stability of Columns	11–1
Chapter 12	Plastic Behavior of Materials	12–1
Chapter 13	Plates and Shells	13–1

NOTES TO THE INSTRUCTOR

The *Solutions Manual for Advanced Mechanics of Materials and Applied Elasticity, Fifth Edition* supplements the study of stress and deformation analyses developed in the book. The main objective of the manual is to provide efficient solutions for problems dealing with variously loaded members. This manual can also serve to guide the instructor in the assignments of problems, in grading these problems, and in preparing lecture materials as well as examination questions. Every effort has been made to have a solutions manual that can cut through the clutter and is as self-explanatory as possible, thus reducing the work on the instructor. It is written and class-tested by the author, Ansel Ugural.

As indicated in the book's *Preface*, the text is designed for the senior and/or first year graduate level courses in stress analysis. In order to accommodate courses of varying emphasis, considerably more material has been presented in the book than can be covered effectively in a single three-credit course. The instructor has the choice of assigning a variety of problems in each chapter. Answers to selected problems are given at the end of the text. A description of the topics covered is given in the introduction of each chapter throughout the text. It is hoped that the foregoing materials will help instructor in organizing his or her course to best fit the needs of his or her students.

Ansel C. Ugural
Holmdel, NJ

CHAPTER 1

SOLUTION (1.1)

We have

$$A = 50 \times 75 = 3.75(10^{-3}) \text{ m}^2, \theta = 90^\circ - 40^\circ = 50^\circ, \text{ and } \sigma_x = P/A.$$

Equations (1.8), with $\theta = 50^\circ$:

$$\sigma_{x'} = 700(10^3) = \sigma_x \cos^2 50^\circ = 0.413\sigma_x = 110.18P$$

or

$$P = 6.35 \text{ kN}$$

$$|\tau_{x'y'}| = 560(10^3)\sigma_x \sin 50^\circ \cos 50^\circ = 0.492\sigma_x = 131.2P$$

Solving

$$P = 4.27 \text{ kN} = P_{all}$$



SOLUTION (1.2)

Normal stress is


$$\sigma_x = \frac{P}{A} = \frac{125(10^3)}{0.05 \times 0.05} = 50 \text{ MPa}$$

(a) Equations (1.11), with $\theta = 90^\circ - 70^\circ = 20^\circ$:

$$\sigma_{x'} = 50 \cos^2 20^\circ = 44.15 \text{ MPa}$$

$$\tau_{x'y'} = -50 \sin 20^\circ \cos 20^\circ = -16.08 \text{ MPa}$$

$$\sigma_{y'} = 50 \cos^2(20^\circ + 90^\circ) = 5.849 \text{ MPa}$$

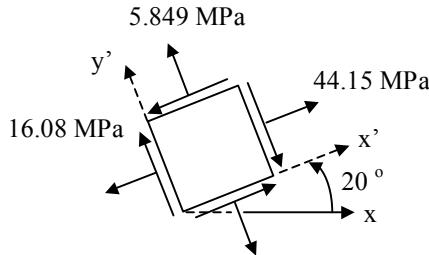


(b) Equations (1.11), with $\theta = 45^\circ$:

$$\sigma_{x'} = 50 \cos^2 45^\circ = 25 \text{ MPa}$$

$$\tau_{x'y'} = -50 \sin 45^\circ \cos 45^\circ = -25 \text{ MPa}$$

$$\sigma_{y'} = 50 \cos^2(45^\circ + 90^\circ) = 25 \text{ MPa}$$

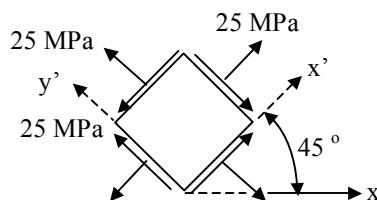

SOLUTION (1.3)

From Eq. (1.11a),

$$\sigma_x = \frac{\sigma_x'}{\cos^2 \theta} = \frac{-75}{\cos^2 30^\circ} = -100 \text{ MPa}$$

For $\theta = 50^\circ$, Eqs. (1.11) give then


$$\sigma_{x'} = -100 \cos^2 50^\circ = -41.32 \text{ MPa}$$

$$\begin{aligned}\tau_{x'y'} &= -(-100) \sin 50^\circ \cos 50^\circ \\ &= 49.24 \text{ MPa}\end{aligned}$$

Similarly, for $\theta = 140^\circ$:

$$\sigma_{x'} = -100 \cos^2 140^\circ = -58.68 \text{ MPa}$$

$$\tau_{x'y'} = -49.24 \text{ MPa}$$

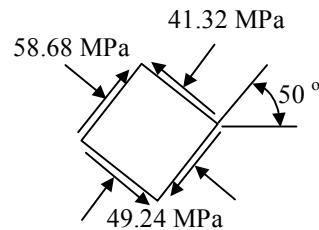

SOLUTION (1.4)

Refer to Fig. 1.6c. Equations (1.11) by substituting the double angle-trigonometric relations, or Eqs. (1.18) with $\sigma_y = 0$ and $\tau_{xy} = 0$, become

$$\sigma_{x'} = \frac{1}{2}\sigma_x + \frac{1}{2}\sigma_x \cos 2\theta \quad \text{and} \quad |\tau_{x'y'}| = \frac{1}{2}\sigma_x \sin 2\theta$$

or

$$20 = \frac{P}{2A}(1 + \cos 2\theta) \quad \text{and} \quad 10 = \frac{P}{2A} \sin 2\theta$$

The foregoing lead to

$$2 \sin 2\theta - \cos 2\theta = 1 \tag{a}$$

By introducing trigonometric identities, Eq. (a) becomes

$$4 \sin \theta \cos \theta - 2 \cos^2 \theta = 0 \text{ or } \tan \theta = 1/2. \text{ Hence}$$

$$\theta = 26.56^\circ$$

Thus,

$$20 = \frac{P}{2(1300)} = (1 + 0.6)$$

gives

$$P = 32.5 \text{ kN}$$

It can be shown that use of Mohr's circle yields readily the same result.

SOLUTION (1.5)

Equations (1.12):

$$\sigma_1 = \frac{P}{A} = \frac{-150(10^3)}{\frac{\pi}{4}(50)^2} = -76.4 \text{ MPa}$$

$$\tau_{\max} = \frac{P}{2A} = 38.2 \text{ MPa}$$

SOLUTION (1.6)

Shaded transverse area:

$$A = 2at = 2(10)(75) = 1.5(10^3) \text{ mm}^2$$

Metal is capable of supporting the load

$$P = \sigma A = 90(10^6)(1.5 \times 10^{-3}) = 135 \text{ kN}$$

Apply Eqs. (1.11):

$$\sigma_{x'} = 25(10^6) = \frac{P}{1.5(10^{-3})} (\cos^2 55^\circ), \quad P = 114 \text{ kN}$$

$$\tau_{x'y'} = 12(10^6) = -\frac{P}{1.5(10^{-3})} \sin 55^\circ \cos 55^\circ, \quad P = 38.3 \text{ kN}$$

Thus,

$$P_{all} = 38.3 \text{ kN}$$



SOLUTION (1.7)

Use Eqs. (1.11):

$$\sigma_{x'} = 20(10^6) = \frac{P}{1.5(10^{-3})} (\cos^2 40^\circ), \quad P = 51.1 \text{ kN}$$

$$\tau_{x'y'} = 8(10^6) = -\frac{P}{1.5(10^{-3})} \sin 40^\circ \cos 40^\circ, \quad P = 24.4 \text{ kN}$$

Thus,

$$P_{all} = 24.4 \text{ kN}$$



SOLUTION (1.8)

$$A = 15 \times 30 = 450 \text{ mm}^2$$

Apply Eqs. (1.11):

$$\sigma_{x'} = \frac{120(10^3)}{450 \times 10^{-6}} (\cos^2 40^\circ) = 156 \text{ MPa}$$

$$\tau_{x'y'} = -\frac{120(10^3)}{450 \times 10^{-6}} \sin 40^\circ \cos 40^\circ = -131 \text{ MPa}$$



SOLUTION (1.9)

We have $A = 450(10^{-6}) \text{ m}^2$. Use Eqs. (1.11):

$$\sigma_{x'} = \frac{-100(10^3)}{450 \times 10^{-6}} (\cos^2 60^\circ) = -55.6 \text{ MPa}$$

$$\tau_{x'y'} = -\frac{-100(10^3)}{450 \times 10^{-6}} \sin 60^\circ \cos 60^\circ = 96.2 \text{ MPa}$$



SOLUTION (1.10)


$$\theta = 40^\circ + 90^\circ = 130^\circ$$

$$\sigma_x = \frac{P}{A} = -\frac{150(10^3)}{\pi(0.08^2 - 0.07^2)} = -31.83 \text{ MPa}$$

Equations (1.11):

$$\sigma_{x'} = -31.83 \cos^2 130^\circ = -13.15 \text{ MPa}$$

$$\tau_{x'y'} = 31.83 \sin 130^\circ \cos 130^\circ = -15.67 \text{ MPa}$$

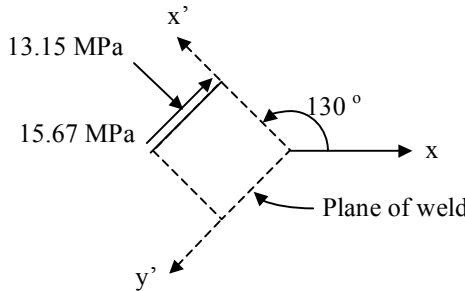

SOLUTION (1.11)

Use Eqs. (1.14),

$$(2x) + (-2xy) + (x) + F_x = 0$$

$$(-y^2) + (-2yz + x) + (0) + F_y = 0$$

$$(z - 4xy) + (0) + (-2z) + F_z = 0$$

Solving, we have (in MN/m^3):

$$F_x = -3x + 2xy \quad F_y = -x + y^2 + 2xz \quad F_z = 4xy + z \quad (\text{a})$$

Substituting $x=-0.01 \text{ m}$, $y=0.03 \text{ m}$, and $z=0.06 \text{ m}$, Eqs. (a) yield the following values

$$F_x = 29.4 \text{ kN/m}^3 \quad F_y = 14.5 \text{ kN/m}^3 \quad F_z = 58.8 \text{ kN/m}^3$$

Resultant body force is thus

$$F = \sqrt{F_x^2 + F_y^2 + F_z^2} = 67.32 \text{ kN/m}^3$$

SOLUTION (1.12)

Equations (1.14):

$$-2c_1y - 2c_1y + 0 + 0 = 0, \quad 4c_1y \neq 0$$

$$0 + c_3z + 0 + 0 = 0, \quad c_3z \neq 0$$

$$0 + 0 + 0 + 0 = 0$$

No. Eqs. (1.14) are not satisfied.


SOLUTION (1.13)

- (a) No. Eqs. (1.14) are not satisfied.
(b) Yes. Eqs. (1.14) are satisfied.

SOLUTION (1.14)


Eqs. (1.14) for the given stress field yield:

$$F_x = F_y = F_z = 0$$

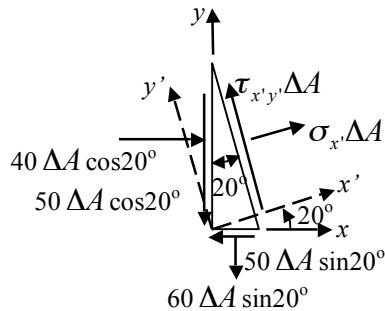SOLUTION (1.15)

$$\begin{aligned}\sum F_{x'} &= 0: \quad \sigma_{x'} \Delta A + 40 \cos^2 20^\circ - 60 \Delta A \sin^2 20^\circ \\ &\quad - 2(50 \Delta A \sin 20^\circ \cos 20^\circ) = 0 \\ \sigma_{x'} &= -35.32 + 7.02 + 32.14 = 3.84 \text{ MPa}\end{aligned}$$

$$\begin{aligned}\sum F_{y'} &= 0: \quad \tau_{x'y'} \Delta A - 40 \Delta A \sin 20^\circ \cos 20^\circ \\ &\quad - 60 \Delta A \sin 20^\circ \cos 20^\circ - 50 \Delta A \cos^2 20^\circ \\ &\quad + 50 \Delta A \sin^2 20^\circ = 0 \\ \tau_{x'y'} &= 12.86 + 19.28 + 44.15 - 5.85 = 70.4 \text{ MPa}\end{aligned}$$

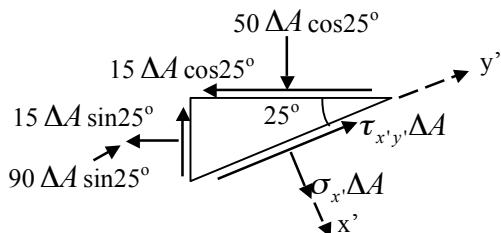SOLUTION (1.16)


$$\begin{aligned}\sum F_{x'} &= 0: \quad \sigma_{x'} \Delta A + 50 \Delta A \cos^2 25^\circ \\ &\quad - 90 \Delta A \sin^2 25^\circ - 2(15 \Delta A \sin 25^\circ \cos 25^\circ) = 0 \\ \sigma_{x'} &= -41.7 + 16.07 + 11.49 = -12.9 \text{ MPa}\end{aligned}$$

(CONT.)

1.16 (CONT.)

$$\begin{aligned}\sum F_{y'} = 0 : \quad & \tau_{x'y'} \Delta A - 50 \Delta A \sin 25^\circ \cos 25^\circ \\ & - 90 \Delta A \sin 25^\circ \cos 25^\circ - 15 \Delta A \cos^2 25^\circ + 15 \Delta A \sin^2 25^\circ = 0 \\ & \tau_{x'y'} = 19.15 + 34.47 + 12.32 - 2.68 = 63.3 \text{ MPa}\end{aligned}$$

◀

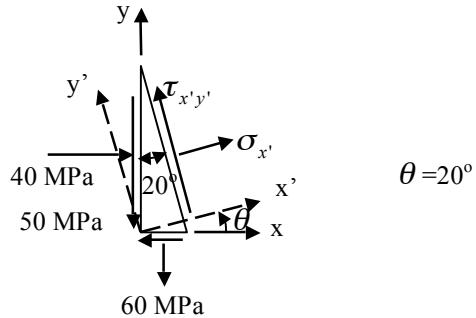
SOLUTION (1.17)

$$\begin{aligned}\sigma_{x'} &= \frac{1}{2}(-40+60) + \frac{1}{2}(-40-60) \cos 40^\circ + 50 \sin 40^\circ \\ &= 10 - 38.3 + 32.1 = -3.8 \text{ MPa}\end{aligned}$$

◀

$$\begin{aligned}\tau_{x'y'} &= -\frac{1}{2}(-40-60) \sin 40^\circ + 50 \cos 40^\circ \\ &= 32.14 + 38.3 = 70.4 \text{ MPa}\end{aligned}$$

◀

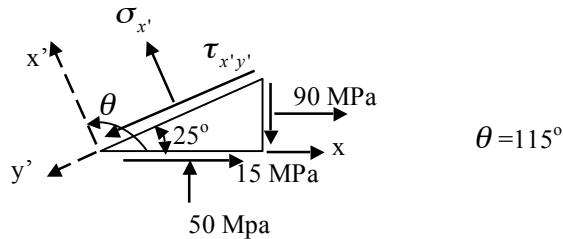SOLUTION (1.18)

$$\begin{aligned}\sigma_{x'} &= \frac{1}{2}(90-50) + \frac{1}{2}(90+50) \cos 230^\circ - 15 \sin 230^\circ \\ &= 20 - 45 + 11.5 = -13.5 \text{ MPa}\end{aligned}$$

◀

$$\begin{aligned}\tau_{x'y'} &= -\frac{1}{2}(90+50) \sin 230^\circ - 15 \cos 230^\circ \\ &= 53.62 + 9.64 = 63.3 \text{ MPa}\end{aligned}$$

◀

SOLUTION (1.19)

Transform from $\theta = 40^\circ$ to $\theta = 0^\circ$. For convenience in computations, Let

$$\sigma_x = -160 \text{ MPa}, \quad \sigma_y = -80 \text{ MPa}, \quad \tau_{xy} = 40 \text{ MPa} \text{ and } \theta = -40^\circ$$

Then

$$\begin{aligned}\sigma_{x'} &= \frac{1}{2}(\sigma_x + \sigma_y) + \frac{1}{2}(\sigma_x - \sigma_y)\cos 2\theta + \tau_{xy} \sin 2\theta \\ &= \frac{1}{2}(-160 - 80) + \frac{1}{2}(-160 + 80)\cos(-80^\circ) + 40 \sin(-80^\circ) \\ &= -138.6 \text{ MPa}\end{aligned}$$




$$\begin{aligned}\tau_{x'y'} &= -\frac{1}{2}(\sigma_x - \sigma_y)\sin 2\theta + \tau_{xy} \cos 2\theta \\ &= -\frac{1}{2}(-160 + 80)\sin(-80^\circ) + 40 \cos(-80^\circ) \\ &= -32.4 \text{ MPa}\end{aligned}$$



$$\text{So } \sigma_{y'} = \sigma_x + \sigma_y - \sigma_{x'} = -160 - 80 + 138.6 = -101.4 \text{ MPa}$$



For $\theta = 0^\circ$:

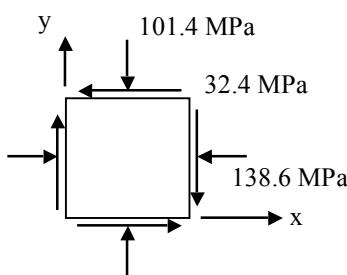


SOLUTION (1.20)

$$\theta = \tan^{-1} \frac{4}{3} = 53.1^\circ$$

$$\begin{aligned}\sigma_{x'} &= \frac{45 + 90}{2} + \frac{45 - 90}{2} \cos 106.2^\circ \\ &= 67.5 + 6.28 = 73.8 \text{ MPa}\end{aligned}$$



$$\tau_{x'y'} = -\frac{45 - 90}{2} \sin 106.2^\circ = 43.2 \text{ MPa}$$


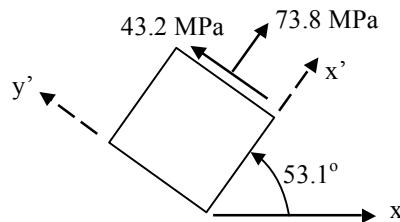


SOLUTION (1.21)

$$\tau_{xy} = 0 \quad \theta = 70^\circ$$

(a) $\tau_{x'y'} = -30 = -\frac{\sigma - 60}{2} \sin 140^\circ \quad \sigma = 153.3 \text{ MPa}$

(b) $\sigma_{x'} = 80 = \frac{\sigma + 60}{2} + \frac{\sigma - 60}{2} \cos 140^\circ \quad \sigma = 231 \text{ MPa}$

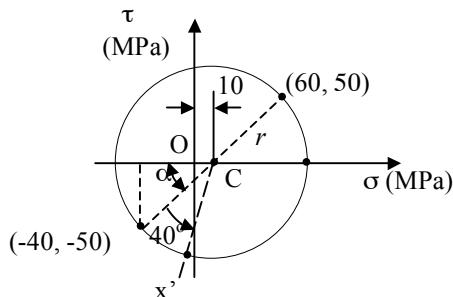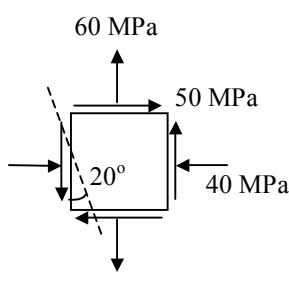SOLUTION (1.22)


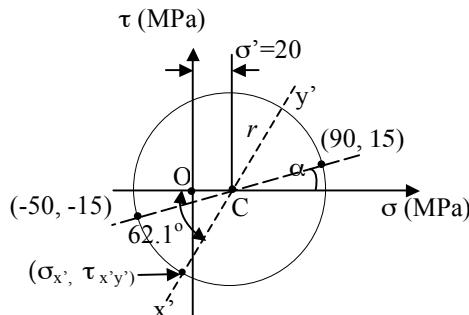
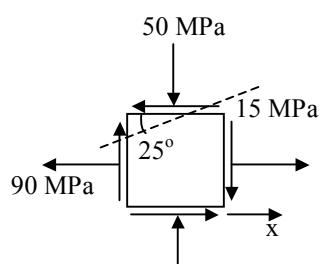
$$\alpha = \tan^{-1} \frac{50}{60} = 39.8^\circ$$

$$r = (60^2 + 50^2)^{\frac{1}{2}} = 78.1$$

$$\tau_{x'y'} = \sin 79.8^\circ (78.1) = 76.9 \text{ MPa}$$

$$\sigma_{x'} = \cos 79.8^\circ (78.1) = -13.83 \text{ MPa}$$

Sketch of results is as shown in solution of Prob. 1.15.


SOLUTION (1.23)


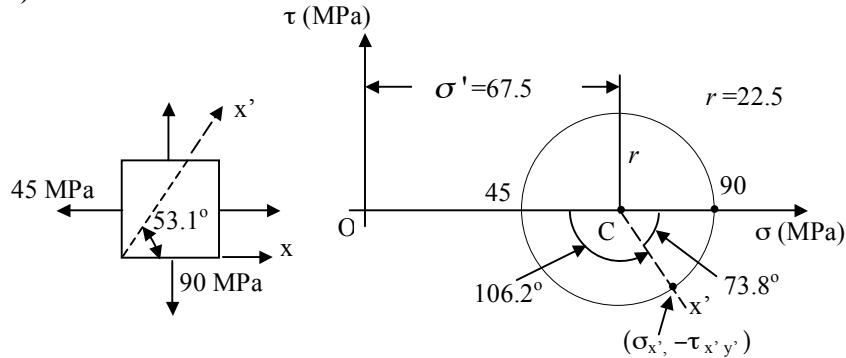
$$\alpha = \tan^{-1} \frac{15}{70} = 12.1^\circ$$

$$r = (15^2 + 70^2)^{\frac{1}{2}} = 73.14$$

$$\tau_{x'y'} = 73.14 \sin 62.1^\circ = 64.6 \text{ MPa}$$

$$\begin{aligned} \sigma_{x'} &= -73.14 \cos 62.1^\circ + 20 \\ &= -14.22 \text{ MPa} \end{aligned}$$

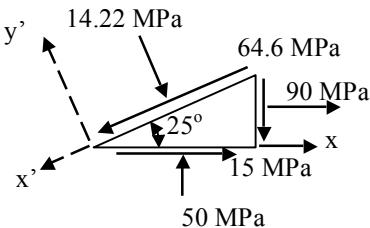


SOLUTION (1.24)


$$\tau_{x'y'} = 22.5 \sin 73.8^\circ = 21.6 \text{ MPa}$$

$$\sigma_{x'} = 67.5 + 22.5 \cos 73.8^\circ = 73.8 \text{ MPa}$$

Sketch of results is as shown in solution of Prob. 1.20.

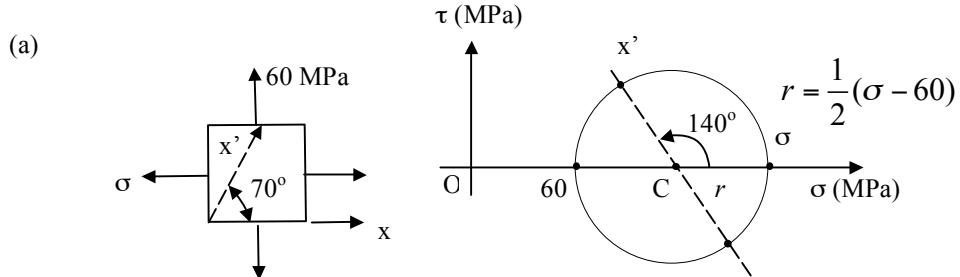SOLUTION (1.25)


$$\tau_{x'y'} = -30 = \frac{\sigma - 60}{2} \sin 40^\circ; \quad \sigma = 153.3 \text{ MPa}$$

$$(b) \quad \sigma_{x'} = 80 = 60 + \frac{\sigma - 60}{2}(1 - \cos 40^\circ)$$

$$\sigma = 231 \text{ MPa}$$

SOLUTION (1.26)

(a) From Mohr's circle, Fig. (a):

$$\sigma_1 = 121 \text{ MPa} \quad \sigma_2 = -71 \text{ MPa} \quad \tau_{\max} = 96 \text{ MPa}$$

$$\theta_p' = -19.3^\circ \quad \theta_s' = 25.7^\circ$$

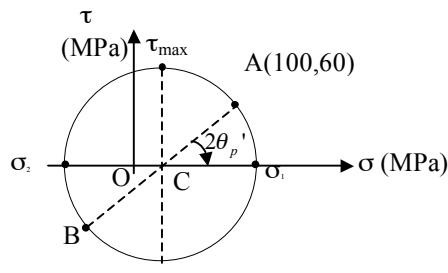


Figure (a)

(CONT.)

1.26 (CONT.)

By applying Eq. (1.20):

$$\sigma_{1,2} = \frac{50}{2} \pm \left[\frac{22,500}{4} + 36000 \right] = 25 \pm 96$$

or

$$\sigma_1 = 121 \text{ MPa} \quad \sigma_2 = -71 \text{ MPa}$$

Using Eq. (1.19):

$$\tan 2\theta_p = -\frac{12}{15} = -0.8$$

$$\theta_p' = -19.3^\circ \quad \theta_s' = 25.7^\circ$$

(b) From Mohr's circle, Fig. (b):

$$\sigma_1 = 200 \text{ MPa} \quad \sigma_2 = -50 \text{ MPa} \quad \tau_{\max} = 125 \text{ MPa}$$

$$\theta_p' = 26.55^\circ \quad \theta_s' = 71.55^\circ$$

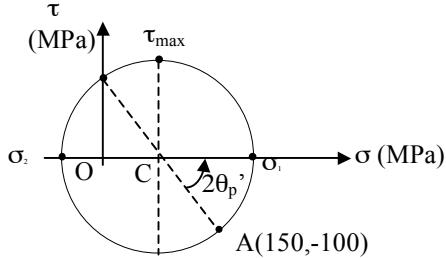


Figure (b)

Through the use of Eq. (1.20),

$$\sigma_{1,2} = 75 \pm \left[\frac{22,500}{4} + 10,000 \right] = 75 \pm 125$$

or

$$\sigma_1 = 200 \text{ MPa} \quad \sigma_2 = -50 \text{ MPa}$$

Using Eq. (1.19), $\tan 2\theta_p = 4/3$:

$$\theta_p' = 26.55^\circ \quad \theta_s' = 71.55^\circ$$

SOLUTION (1.27)

Referring to Mohr's circle, Fig. 1.15:

$$\sigma_{x'} = \frac{\sigma_1 + \sigma_2}{2} + \frac{\sigma_1 - \sigma_2}{2} \cos 2\theta \quad (\text{a})$$

$$\sigma_{y'} = \frac{\sigma_1 + \sigma_2}{2} - \frac{\sigma_1 - \sigma_2}{2} \cos 2\theta$$

$$\tau_{x'y'} = \frac{\sigma_1 - \sigma_2}{2} \sin 2\theta \quad (\text{b})$$

From Eqs. (a),

$$\sigma_{x'} + \sigma_{y'} = \sigma_1 + \sigma_2$$

By using $\cos^2 2\theta + \sin^2 2\theta = 1$, and Eqs. (a) and (b), we have

$$\sigma_{x'} \cdot \sigma_{y'} - \tau_{x'y'}^2 = \sigma_1 \cdot \sigma_2 = \text{const.}$$

SOLUTION (1.28)

We have

$$\tan 2\theta_p = \frac{2\tau_{xy}}{\sigma_x - \sigma_y} = \frac{2(-70)}{50 - (190)} = -0.583$$


$$2\theta_p = -30.26^\circ \quad \text{and} \quad \theta_p = -15.13^\circ$$

Equations (1.18):

$$\sigma_{x'} = \frac{50-190}{2} + \frac{50+190}{2} \cos(-30.26^\circ) - 70 \sin(-30.26^\circ)$$

$$= -70 + 103.65 + 35.275 = 68.92 \text{ MPa} = \sigma_1$$

$$\sigma_{y'} = \sigma_x + \sigma_y - \sigma_{x'} = -208.9 \text{ MPa} = \sigma_2$$

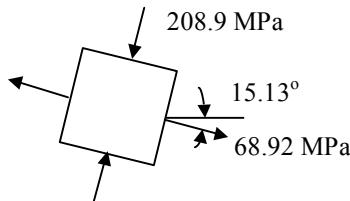

SOLUTION (1.29)

$$\tau_{\max} = \sqrt{\left(\frac{\sigma_x - \sigma_y}{2}\right)^2 + \tau_{xy}^2}$$

Substituting the given values

$$140^2 = \left(\frac{60+100}{2}\right)^2 + \tau_{xy}^2$$

or

$$\tau_{xy,\max} = 114.19 \text{ MPa}$$



SOLUTION (1.30)


Transform from $\theta = 60^\circ$ to $\theta = 0^\circ$ with $\sigma_{x'} = -20 \text{ MPa}$, $\sigma_{y'} = 60 \text{ MPa}$,

$\tau_{x'y'} = -22 \text{ MPa}$, and $\theta = -60^\circ$. Use Eqs. (1.18):

$$\sigma_x = \frac{-20+60}{2} + \frac{-20-60}{2} \cos 2(-60^\circ) - 22 \sin 2(-60^\circ) = 59 \text{ MPa}$$

$$\sigma_y = \sigma_{x'} + \sigma_{y'} - \sigma_x = -19 \text{ MPa}$$

$$\tau_{xy} = -23.6 \text{ MPa}$$

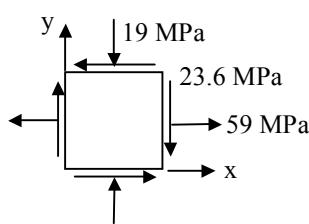

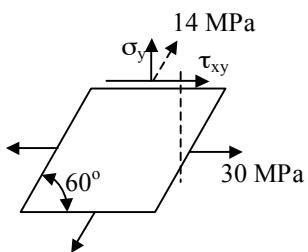
SOLUTION (1.31)


Figure (a)

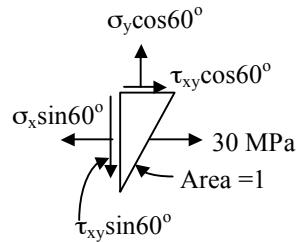


Figure (b)

(a) Figure (a):

$$\sigma_y = 14 \sin 60^\circ = 12.12 \text{ MPa}$$

$$\tau_{xy} = 14 \cos 60^\circ = 7 \text{ MPa}$$

Figure (b):

$$\sum F_y = 12.12 \cos 60^\circ - \tau_{xy} \sin 60^\circ = 0$$

or

$$\tau_{xy} = 7 \text{ MPa} \text{ (as before)}$$

$$\sum F_x = -\sigma_x \sin 60^\circ + 30 + 7 \cos 60^\circ = 0$$

or

$$\sigma_x = 38.68 \text{ MPa}$$

(b) Equation (1.20) is therefore:

$$\sigma_{1,2} = \frac{38.68+12.12}{2} \pm \left[\left(\frac{38.68-12.12}{2} \right)^2 + 7^2 \right]$$

$$\text{or } \sigma_1 = 40.41 \text{ MPa}, \quad \sigma_2 = 10.39 \text{ MPa}$$


Also,

$$\theta_p = \frac{1}{2} \tan^{-1} \frac{2(7)}{38.68-12.12} = 13.9^\circ$$

Note: Eq. (1.18a) gives, $\sigma_{x'} = 40.41 \text{ MPa}$.

Thus,

$$\theta_p' = 13.9^\circ$$

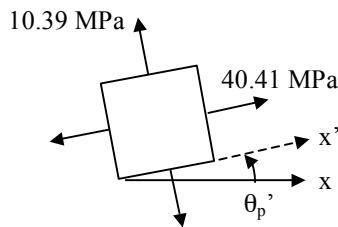

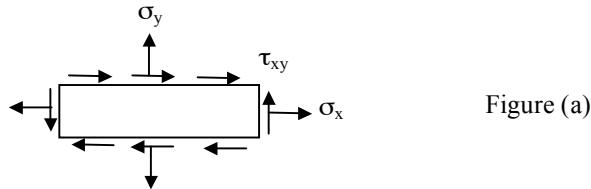
SOLUTION (1.32)


Figure (a)

Figure (a):

$$\sigma_x = 100 \cos 45^\circ = 70.7 \text{ MPa}$$

$$\sigma_y = 100 \sin 45^\circ = 70.7 \text{ MPa}$$

$$\tau_{xy} = 100 \cos 45^\circ = 70.7 \text{ MPa}$$

Now, Eqs. (1.18) give (Fig. b):

$$\sigma_{x'} = 70.7 + 0 + 70.7 \sin 240^\circ = 9.47 \text{ MPa}$$

$$\tau_{x'y'} = -0 + 70.7 \cos 240^\circ = -35.35 \text{ MPa}$$

$$\sigma_{y'} = 70.7 - 0 - 70.7 \sin 240^\circ = 131.9 \text{ MPa}$$

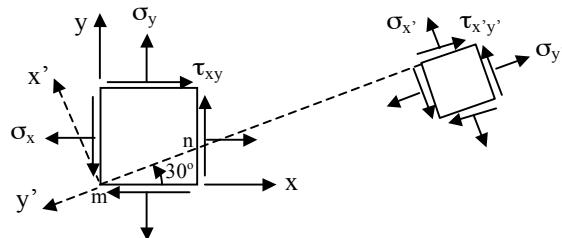


Figure (b)

SOLUTION (1.33)

$$\sigma_y = -70 \sin 30^\circ = -35 \text{ MPa}$$

$$\tau_{xy} = 70 \cos 30^\circ = 60.6 \text{ MPa}$$

(a) Figure (a):

$$\sum F_x = -150 + 0.5\sigma_x + 60.6(0.866) = 0$$

or $\sigma_x = 195 \text{ MPa}$

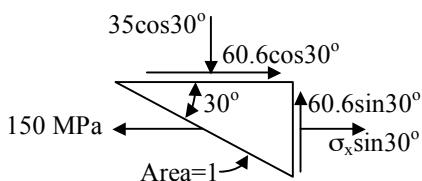


Figure (a)

(CONT.)

1.33 (CONT.)

(b) Equation (1.20):

$$\sigma_{1,2} = \frac{195-30}{2} \pm \left[\left(\frac{195+35}{2} \right)^2 + 60.6^2 \right]$$

or $\sigma_1 = 210 \text{ MPa}$ $\sigma_2 = -50 \text{ MPa}$

Also,


$$\theta_p = \frac{1}{2} \tan^{-1} \frac{2(60.6)}{195+35} = 13.89^\circ$$

Equation (1.18a):

$$\sigma_{x'} = 80 + 115 \cos 2(13.89^\circ) + 60.6 \sin 2(13.89^\circ) = 210 \text{ MPa}$$

Thus,

$$\theta_p' = 13.89^\circ$$

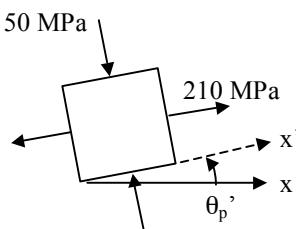


SOLUTION (1.34)

For pure shear, $\sigma_1 = -\sigma_2$:

$$\frac{pr}{t} = -\frac{pr}{2t} + \frac{P}{2\pi rt}$$

from which

$$P = 3\pi pr^2$$

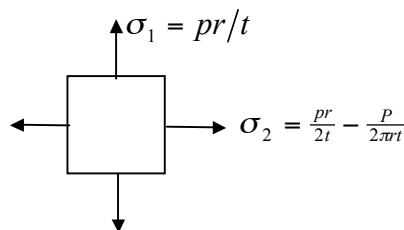

SOLUTION (1.35)

Table C.1:

$$A = 2\pi rt$$

$$J = 2\pi r^3 t$$

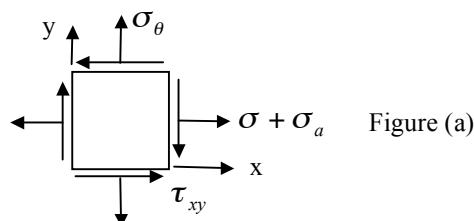


Figure (a)

Stresses are (Fig. a):

$$\sigma = \frac{-P}{A} = \frac{-30(10^3)\pi}{2\pi(0.12)(0.005)} = -25 \text{ MPa}$$

$$\sigma_a = \frac{pr}{2t} = \frac{4(10^6)120}{2(5)} = 48 \text{ MPa}$$

$$\sigma_\theta = 2\sigma_a = 96 \text{ MPa}$$

$$\tau_{xy} = \frac{-Tr}{J} = \frac{-10\pi(10^3)}{2\pi(0.12^2)(0.005)} = -69.4 \text{ MPa}$$

(CONT.)

1.35 (CONT.)

Hence,

$$\sigma_x = 48 - 25 = 23 \text{ MPa} \quad \sigma_y = 96 \text{ MPa}$$

Therefore, we have

$$\tau_{\max} = \pm \left[\left(\frac{23-96}{2} \right)^2 + 69.4^2 \right] = \pm 78.4 \text{ MPa}$$

Also

$$\sigma' = \frac{1}{2}(23 + 96) = 59.5 \text{ MPa}$$

and

$$\theta_s = \frac{1}{2} \tan^{-1} \frac{23-96}{2(-69.4)} = -13.87^\circ$$

Equation (1.18b) with $\theta_s = -13.87^\circ$:

$$\tau_{x'y'} = -16.99 - 61.42 = -78.4 \text{ MPa}$$

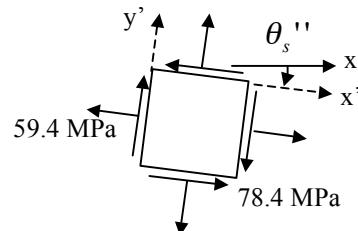


Figure (b)

Thus,

$$\theta_s'' = 13.87^\circ$$

SOLUTION (1.36)

$$A = 2\pi r t = 2\pi(60)(4) = 1508 \text{ mm}^2$$

$$J = 2\pi r^3 t = 2\pi(60)^3(4) = 5.429 \times 10^6 \text{ mm}^4$$

$$\sigma_y = \frac{pr}{t} = \frac{5(60)}{4} = 75 \text{ MPa}$$

$$\tau_{xy} = -\frac{Tr}{J} = -\frac{600(0.05)}{5.429(10^{-6})}$$


$$= -5.526 \text{ MPa}$$

$$\sigma_x = \frac{pr}{2t} + \frac{P}{A} = 37.5 + \frac{P}{1508}$$

$(P \text{ in newtons})$

Thus

$$\sigma_1 = \frac{\sigma_x + \sigma_y}{2} + \sqrt{\left(\frac{\sigma_x - \sigma_y}{2} \right)^2 + \tau_{xy}^2}$$

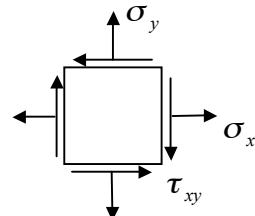

Substituting the numerical values gives

$$80 = 56.3 + 331.6 \times 10^{-6} P + \left[(-18.75 + 331.6 \times 10^{-6} P)^2 + (-5.526)^2 \right]$$

Solving,


$$P = 64.01 \text{ kN}$$

SOLUTION (1.37)

At point A, $T = 8 \text{ kN}$ and $P = 400 \text{ kN}$

$$\sigma_x = -\frac{P}{A} = -\frac{4(400 \times 10^3)}{\pi(0.1)^2} = -50.9 \text{ MPa}$$

$$\tau_{xy} = \frac{16T}{\pi d^3} = \frac{16(8 \times 10^3)}{\pi(0.1)^3} = 40.7 \text{ MPa}$$

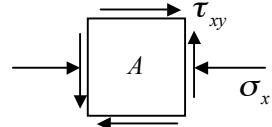


Hence

$$\begin{aligned}\tau_{\max} &= \sqrt{\left(\frac{\sigma_x}{2}\right)^2 + \tau_{xy}^2} \\ &= \sqrt{(-25.45)^2 + (40.7)^2} \\ &= 48 \text{ MPa} = R\end{aligned}$$


$$\sigma_{avg} = \frac{\sigma_x}{2} = -25.45 \text{ MPa}$$

$$\tan 2\theta_p'' = \frac{40.7}{25.45}, \quad \theta_p'' = 29^\circ$$

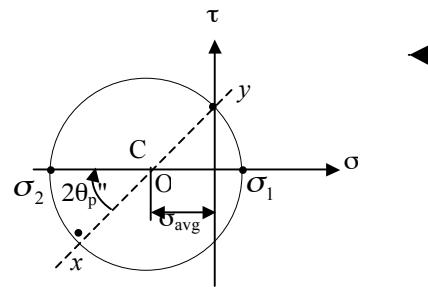

SOLUTION (1.38)

$$\theta = \alpha + 90 = 50 + 90 = 140^\circ$$

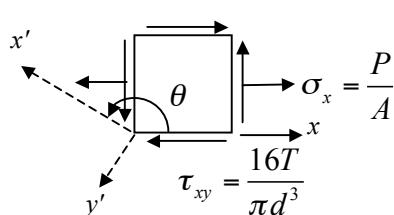

$$\sigma_x = \frac{120 \times 10^3}{\frac{\pi}{4}(0.04)^2} = 95.5 \text{ MPa}$$


$$\tau = \frac{16(1.5 \times 10^{-3})}{\pi(0.04)^3} = 119.4 \text{ MPa}$$

Equations(1.18):

$$\sigma_w = \sigma_{x'} = \frac{95.5}{2} + \frac{95.5}{2} \cos 280^\circ + 119.4 \sin 280^\circ = 61.5 \text{ MPa}$$

and

$$\tau_w = \tau_{x'y'} = -\frac{95.5}{2} \sin 280^\circ - 119.4 \cos 280^\circ = 47.02 - 20.73 = 26.3 \text{ MPa}$$

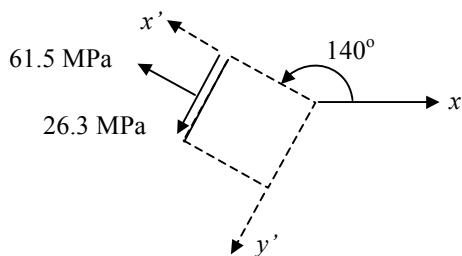

SOLUTION (1.39)

$$A = \frac{\pi}{4}(180^2 - 120^2) = 11.31 \times 10^3 \text{ mm}^2$$

$$J = \frac{\pi}{32}(180^4 - 120^4) = 82.70 \times 10^6 \text{ mm}^4$$

$$\sigma_x = -\frac{P}{A} = -\frac{700}{11.31} = -61.89 \text{ MPa}, \quad \sigma_y = 0$$

$$\tau_{xy} = \frac{Tr}{J} = \frac{20(90)}{82.70 \times 10^6} = 21.76 \text{ MPa}$$

Equation (1.20) is therefore

$$\sigma_{\max} = \sigma_1 = -\frac{61.89}{2} + \sqrt{\left(\frac{61.89}{2}\right)^2 + (21.76)^2}$$

$$= 6.885 \text{ MPa}$$




SOLUTION (1.40)

$$P = \tau_0 L t$$

$$M = \tau_0 L t h$$

$$A = 2ht$$


$$I = \frac{1}{12} t (2h)^3 = \frac{2}{3} t h^3$$

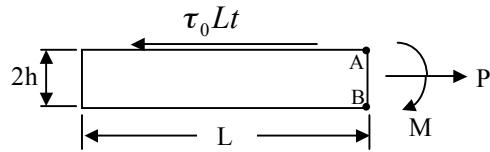

Axial stress: $\sigma_a = \frac{P}{A} = \frac{\tau_0 L}{2h}$

Bending stress: $\sigma_b = \frac{Mc}{I} = \frac{3\tau_0 L}{2h}$

Point A

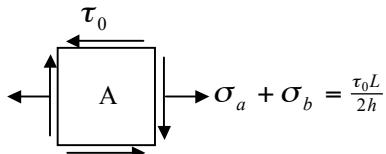


From Eqs. (1.20) and (1.22), we obtain

$$\sigma_{1,2} = \frac{\tau_0 L}{h} \pm \tau_0 \sqrt{\left(\frac{L}{h}\right)^2 + 1}$$

$$\tau_{\max} = \tau_0 \sqrt{\left(\frac{L}{h}\right)^2 + 1}$$




Point B

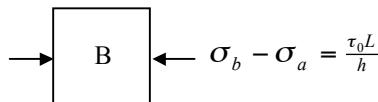

Hence


$$\sigma_1 = \frac{\tau_0 L}{h} \quad \sigma_2 = 0 \quad \tau_{\max} = \frac{\tau_0}{2h}$$

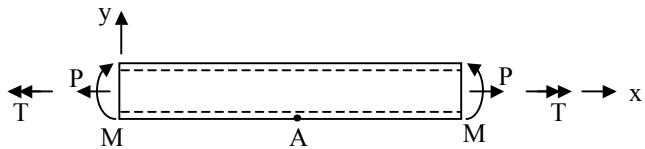

SOLUTION (1.41)


$$A = \pi(30^2 - 15^2) = 2.121(10^{-3}) \text{ m}^2$$

$$I = \frac{\pi}{4}(30^4 - 15^4) = 0.596(10^{-6}) \text{ m}^4 \quad J = 2I$$

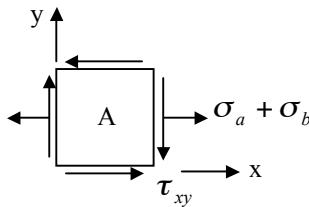

We have

$$\sigma_a = \frac{P}{A} = \frac{50(10^3)}{2.12(10^{-3})} = 23.58 \text{ MPa}$$

$$\sigma_b = \frac{Mr}{I} = \frac{200(0.03)}{0.596(10^{-6})} = 10.07 \text{ MPa}$$

$$\tau_{xy} = \frac{-Tr}{J} = \frac{-500(0.03)}{1.192(10^{-6})} = -12.58 \text{ MPa}$$

Thus,

$$\sigma_x = 23.58 + 10.07 = 33.65 \text{ MPa} \quad \sigma' = 16.83 \text{ MPa}$$

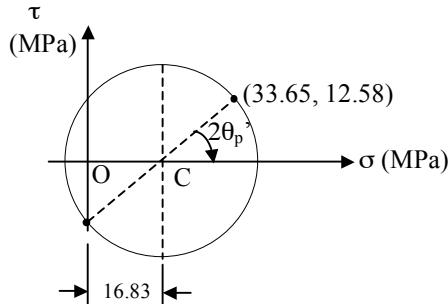


Figure (a)

From Mohr's circle (Fig. a):

$$r = \sqrt{12.58^2 + 16.83^2} = 21.01 \text{ MPa} \quad \theta_p' = \frac{1}{2} \tan^{-1} \frac{12.58}{16.83} = 18.39^\circ$$

$$\sigma_1 = 16.83 + 21.01 = 37.84 \text{ MPa}$$

$$\sigma_2 = -4.18 \text{ MPa}$$



Results are shown in Fig. (b).

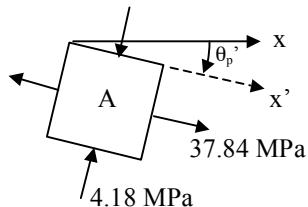


Figure (b)

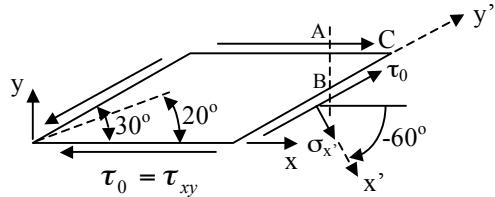
SOLUTION (1.42)


Figure (a)

(a) At $\theta = -60^\circ$ (Fig. a):

$$0 = \frac{\sigma_x + \sigma_y}{2} + \frac{\sigma_x - \sigma_y}{2} \cos 2(-60^\circ) + \tau_0 \sin 2(-60^\circ)$$

or

$$0 = 0.5\sigma_x + 1.5\sigma_y - 1.732\tau_0 \quad (\text{a})$$

We also have

$$\tau_0 = -\frac{\sigma_x - \sigma_y}{2} \sin 2(-60^\circ) + \cos 2(-60^\circ)$$

or

$$\sigma_x = 3.464\tau_0 + \sigma_y \quad (\text{b})$$

Substituting Eq. (b) into (a), we obtain $\sigma_y = 0$. Results are shown in Fig. b.

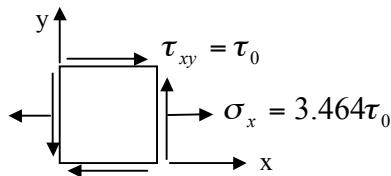


Figure (b)

Alternatively, using an element ABC (Fig. c):

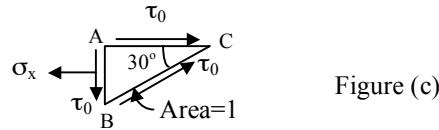


Figure (c)

$$\sum F_x = 0.5\sigma_x - 0.866\tau_0 - 0.866\tau_0 = 0$$

or $\sigma_x = 3.464\tau_0$, as before.

Stresses on planes at 20° , taking $\theta = -70^\circ$ (Fig. b):

$$\sigma_{20^\circ} = [\frac{3.464}{2} + \frac{3.464}{2} \cos(-140^\circ) + \sin(-140^\circ)]\tau_0 = -0.237\tau_0 \quad \blacktriangleleft$$

$$\tau_{20^\circ} = [-\frac{3.464}{2} \sin(-140^\circ) + \cos(-140^\circ)]\tau_0 = 0.347\tau_0 \quad \blacktriangleleft$$

1.42 (CONT.)

(b) Principal stresses:

$$\sigma_{1,2} = \frac{3.464}{2} \pm \left[\left(\frac{3.464}{2} \right)^2 + \tau_0^2 \right]$$

$$\sigma_1 = 3.732\tau_0 \quad \sigma_2 = -0.268\tau_0$$

The maximum principal stress is on plane inclined at

$$\theta_p' = \frac{1}{2} \tan^{-1} \frac{\tau_0}{1.732\tau_0} = 15^\circ$$

SOLUTION (1.43)

At a critical point on the shaft surface, the state of stress of stress is as shown in Fig. (a).

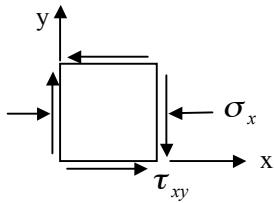


Figure (a)

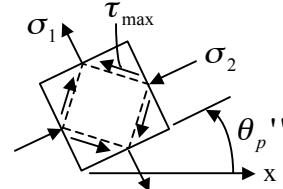


Figure (b)

We have

$$\begin{aligned}\sigma_x &= -\frac{P}{A} - \frac{Mr}{I} \\ &= -\frac{81(10^3)}{\pi(0.075)^2} - \frac{13(10^3)(0.075)}{\pi(0.075)^4/4} = -43.818 \text{ MPa}\end{aligned}$$

$$\tau_{xy} = -\frac{Tr}{J} = -\frac{(15.6 \times 10^3)(0.075)}{\pi(0.075)^4/2} = -23.54 \text{ MPa}$$

Therefore,

$$\sigma_{1,2} = \frac{-43.818}{2} \pm \left[\left(\frac{-43.818}{2} \right)^2 + (-23.54)^2 \right]$$

or

$$\sigma_1 = 10.248 \text{ MPa}, \quad \sigma_2 = -54.066 \text{ MPa}$$

$$\tau_{\max} = \frac{1}{2}(\sigma_1 - \sigma_2) = 32.157 \text{ MPa}$$

and

$$\theta_p'' = \frac{1}{2} \tan^{-1} \frac{2(-23.54)}{43.818} = 23.53^\circ$$

Results are shown in Fig. (b).

SOLUTION (1.44)

Apply Eqs. (1.20) to Fig. P1.44b, for $\theta = -30^\circ$:

$$\sigma_{xb} = -40 \sin 2(-30^\circ) = 20\sqrt{3} \text{ MPa}$$

$$\sigma_{yb} = -20\sqrt{3} \text{ MPa}$$

(b)

$$\tau_{xyb} = -40 \cos 2(-30^\circ) = -20 \text{ MPa}$$

(CONT.)

1.44 (CONT.)

Now apply Eqs. (1.18) to Fig. P1.44c, for $\theta = -60^\circ$:

$$\begin{aligned}\sigma_{xc} &= 10 \sin 2(-60^\circ) = -5\sqrt{3} \text{ MPa} \\ \sigma_{yc} &= 5\sqrt{3} \text{ MPa} \\ \tau_{xyc} &= 10 \cos 2(-60^\circ) = -5 \text{ MPa}\end{aligned}\quad (\text{c})$$

Superposing stresses in Eqs. (b) and (c) and those in Fig. P1.44a, we obtain Fig. (a).

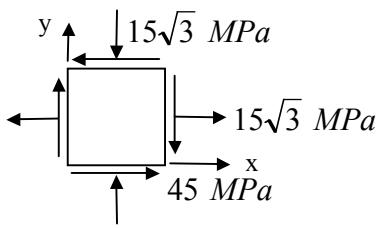


Figure (a)

Referring to Fig. (a):

$$\sigma_{1,2} = 0 \pm \left[(15\sqrt{3})^2 + (-45)^2 \right]^{\frac{1}{2}}$$

or

$$\sigma_1 = 51.96 \text{ MPa} \quad \sigma_2 = -51.96 \text{ MPa}$$

When

$$\theta_p' = \frac{1}{2} \tan^{-1} \frac{2(-45)}{2(15\sqrt{3})} = -30^\circ$$



is substituted into Eq. (1.18a), we have 51.96 MPa (Fig. b).

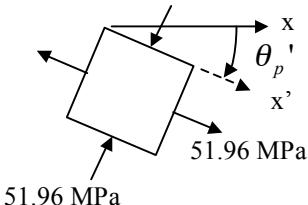


Figure (b)

SOLUTION (1.45)

Apply Eqs. (1.18) to Fig. P1.45a, for $\theta = -15^\circ$, to obtain stresses in Fig. (a):

$$\begin{aligned}\sigma_{xa} &= -\frac{30}{2} - \frac{30}{2} \cos 2(-15^\circ) = -27.99 \text{ MPa} \\ \sigma_{ya} &= -15 + 15 \cos 2(-15^\circ) = -2.01 \text{ MPa} \\ \tau_{xya} &= 15 \sin 2(-15^\circ) = -7.5 \text{ MPa}\end{aligned}$$

Superposition of stresses in Figs. (a) and P1.45b gives Fig. (b).

(CONT.)

1.45 (CONT.)

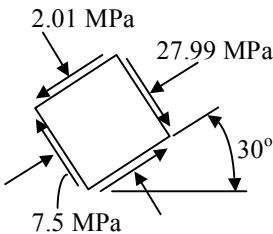


Figure (a)

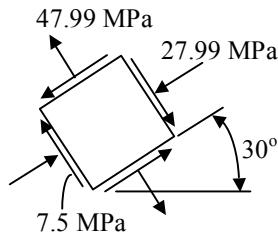


Figure (b)

Apply Eq. (1.20) to Fig. (b):

$$\sigma_{1,2} = \frac{-27.99+47.99}{2} \pm \left[\frac{1}{4}(-27.99 - 47.99)^2 + (-7.5)^2 \right]$$

or

$$\sigma_1 = 48.72 \text{ MPa}, \quad \sigma_2 = -28.72 \text{ MPa}$$

When

$$\theta_p = \frac{1}{2} \tan^{-1} \frac{2(-7.5)}{-(27.99+47.99)} = 5.58^\circ$$

is substituted into Eq. (1.18a), we obtain -28.72 MPa (Fig. c).

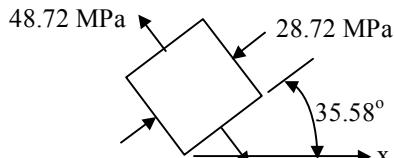


Figure (c)

SOLUTION (1.46)

Equations (1.18) are applied to Fig. P1.46a, for $\theta = -30^\circ$:

$$\sigma_{xa} = \frac{20+30}{2} + \frac{20-30}{2} \cos 2(-30^\circ) = 22.5 \text{ MPa}$$

$$\sigma_{ya} = 25 - (-5) \cos 2(-30^\circ) = 27.5 \text{ MPa}$$

$$\tau_{xya} = -(-5) \sin 2(-30^\circ) = -4.33 \text{ MPa}$$

These stresses and that of Fig. P1.46b are superimposed to yield Fig. (a).

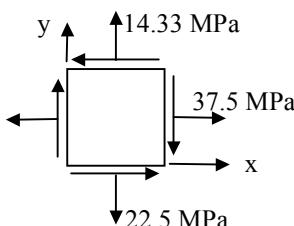


Figure (a)

(CONT.)

1.46 (CONT.)

Principal stresses are thus

$$\sigma_{1,2} = \frac{37.5+22.5}{2} \pm \left[\left(\frac{37.5-22.5}{2} \right)^2 + 14.33^2 \right]$$

or

$$\sigma_1 = 46.17 \text{ MPa} \quad \sigma_2 = 13.83 \text{ MPa}$$

Hence

$$\tau_{\max} = \frac{1}{2}(\sigma_1 - \sigma_2) = 16.17 \text{ MPa}$$

We have

$$\theta_p = \frac{1}{2} \tan^{-1} \frac{2(-14.33)}{37.5-22.5} = -31.2^\circ$$

Equation (1.18a) results in

$$\sigma_{x'} = \frac{37.5+22.5}{2} + \frac{37.5-22.5}{2} \cos(-62.4^\circ) - 14.33 \sin(-62.4^\circ) = 46.17 \text{ MPa}$$

Therefore

$$\theta_p' = 31.2^\circ \quad \curvearrowright$$

Results are shown in a properly oriented element in Fig. (b).

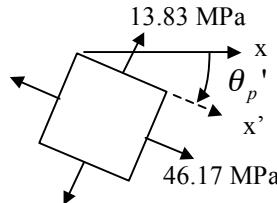


Figure (b)

SOLUTION (1.47)

State of stress is represented by Mohr's circle in Fig. (a).

From this circle, we determine

$$\sigma_x = -40 \text{ MPa}$$

$$\sigma_y = 20 \text{ MPa}$$

$$\theta_p' = \frac{1}{2} \tan^{-1} \frac{4}{3} = 26.57^\circ$$

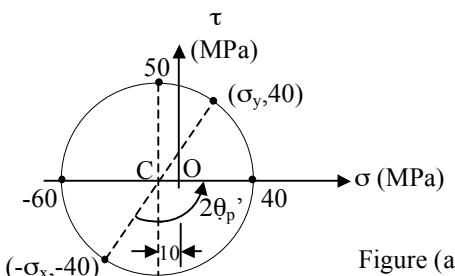


Figure (a)

Results are shown in Fig. (b).

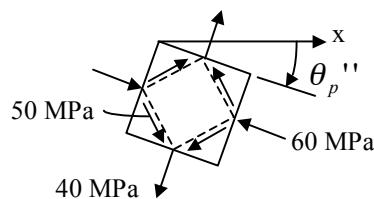
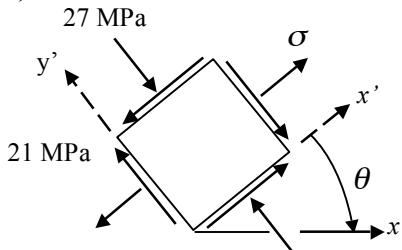


Figure (b)

SOLUTION (1.48)


$$\sigma_x + \sigma_y = \sigma_{x'} + \sigma_{y'}$$

$$45 - 30 = -27 + \sigma; \quad \sigma = 42 \text{ MPa}$$

$$\sigma_{x'} = 42 = \frac{45 - 30}{2} + \frac{45 + 30}{2} \cos 2\theta + 15 \sin 2\theta$$

or

$$49.5 = 37.5 \cos 2\theta + 15 \sin 2\theta \quad (1)$$

$$\tau_{x'y'} = -21 = -37.5 \sin 2\theta + 15 \cos 2\theta$$

Multiply this by -2.5 :

$$52.5 = 93.75 \sin 2\theta - 37.5 \cos 2\theta \quad (2)$$

Add Eqs. (1) and (2),

$$102 = 108.75 \sin 2\theta, \quad 2\theta = 69.71^\circ$$

or

$$\theta = 34.9^\circ$$

SOLUTION (1.49)

State of stress is represented by Mohr's circle in Fig. (a).

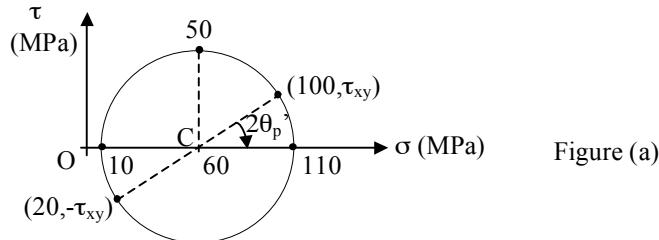


Figure (a)

Referring to this circle, we obtain the results (Fig. b).

$$\theta_p' = \frac{1}{2} \tan^{-1} \frac{3}{4} = 18.43^\circ$$

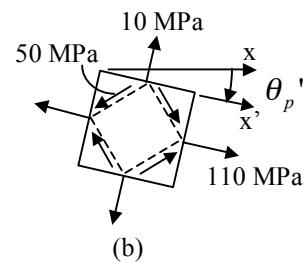
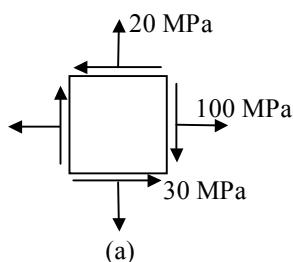


Figure (b)

SOLUTION (1.50)

$$\sigma_x = 60 \text{ MPa} \quad \sigma_y = -18 \text{ MPa} \quad \tau_{xy} = -15 \text{ MPa} \quad \sigma_{x'} = 30 \text{ MPa}$$

From Equation (1.18a):

$$30 = \frac{60-18}{2} + \frac{60+18}{2} \cos 2\theta_1 - 15 \sin 2\theta_1$$

or

$$13 \cos 2\theta_1 - 5 \sin 2\theta_1 - 3 = 0$$

Solving

$$2\theta_1 = 56.52^\circ \quad \theta_1 = 28.26^\circ$$

We have

$$\sigma_{y'} = \sigma_x + \sigma_y - \sigma_{x'} = 12 \text{ MPa}$$

Equation (1.14b) gives

$$\tau_{x'y'} = -\frac{60+18}{2} \sin 56.52^\circ - 15 \cos 56.52^\circ = -40.8 \text{ MPa}$$

SOLUTION (1.51)

We have

$$\sigma = \frac{4M}{\pi r^3} = \frac{4(21\pi)10^3}{\pi(0.1)^3} = 84 \text{ MPa}$$

State of stress is represented by Mohr's circle in Fig. (a).

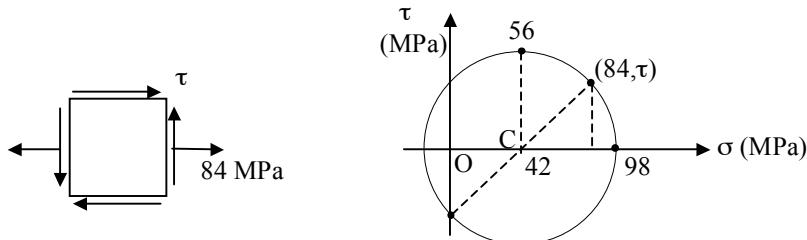


Figure (a)


$$\tau = (56^2 - 42^2)^{\frac{1}{2}} = 37.04 \text{ MPa}$$

Thus

$$T = \frac{\pi J}{r} = \frac{(37.04)\pi(0.1^3)}{2} = 58.18 \text{ kN} \cdot \text{m}$$

Hence

$$P = 2\pi f T = 2\pi(20)58.18 = 7311 \text{ kW}$$

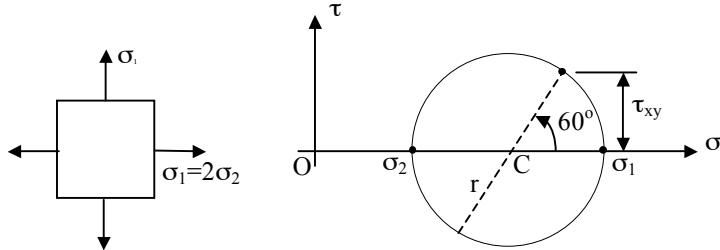SOLUTION (1.52)


$$r = \frac{2\sigma_2 - \sigma_1}{2} = \frac{\sigma_2}{2}$$

From Mohr's circle,

$$\tau_{x'y'} = \left(\frac{\sigma_2}{2}\right) \sin 60^\circ = 0.433\sigma_2$$

Therefore

$$30 = 0.433\sigma_2 \quad \sigma_2 = 69.28 \text{ MPa}$$


We have

$$\sigma_2 = \frac{pr}{2t} = 69.28 \quad p\left(\frac{250}{2}\right) = 69.28$$

Solving

$$p = 2.771 \text{ MPa}$$

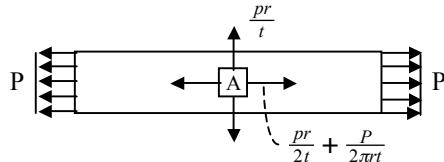

SOLUTION (1.53)


Mohr's circle representing stress at point A is shown in Fig. (a).

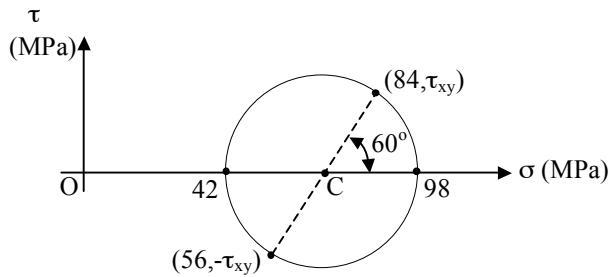


Figure (a)

From this circle:

$$42 = \frac{p(0.45)}{0.005} = 90p \quad \text{or} \quad p = 467 \text{ kPa}$$




Then

$$98(10^3) = \frac{90P}{2} + \frac{P}{2\pi(0.45)(0.005)}$$

gives

$$P = 1069 \text{ kN}$$

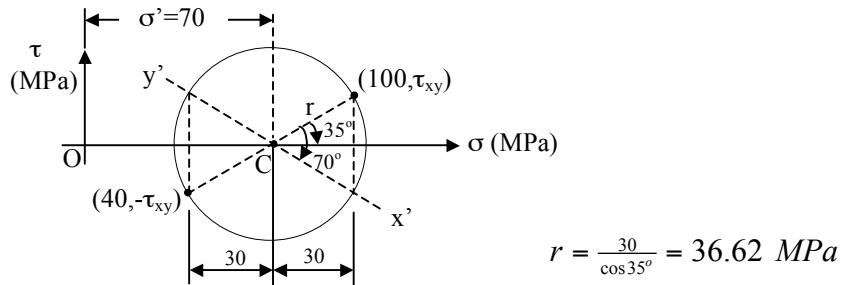

SOLUTION (1.54)


(a) $\tau_{xy} = -36.62 \sin 35^\circ = -21 \text{ MPa}$

(b) Because of symmetry:

$$\tau_{x'y'} = -\tau_{xy} = 21 \text{ MPa}$$

and

$$\sigma_x + \sigma_y = \sigma_{x'} + \sigma_{y'} = 140 \text{ MPa}$$

gives

$$\sigma_{y'} = 40 \text{ MPa}$$

SOLUTION (1.55)

State of stress is represented by Mohr's circle in Fig. (a).

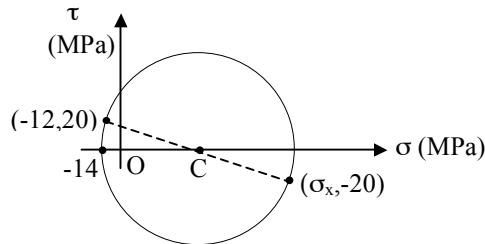


Figure (a)

(a) Using this circle, we write

$$\tau_{\max} = \left[\left(\frac{\sigma_x + 12}{2} \right)^2 + 20^2 \right]^{\frac{1}{2}}$$

and

$$\tau_{\max} = 14 + OC = 14 + \frac{1}{2}(\sigma_x - 12)$$

Solving,

$$\sigma_x = 186 \text{ MPa}$$

Note that, alternately,

(CONT.)

1.55 (CONT.)

$$-14 = \frac{\sigma_x - 12}{2} - \left[\left(\frac{\sigma_x + 12}{2} \right)^2 + 20^2 \right]$$

yields $\sigma_x = 186 \text{ MPa}$, as before.

(b) We have

$$\sigma_{1,2} = \frac{186-12}{2} \pm \left[\left(\frac{186+12}{2} \right)^2 + 20^2 \right]$$

or

$$\sigma_1 = 188 \text{ MPa} \quad \sigma_2 = -14 \text{ MPa}$$

and

$$\tau_{\max} = \frac{1}{2}(\sigma_1 - \sigma_2) = 101 \text{ MPa}$$

Also

$$\theta_p' = \frac{1}{2} \tan^{-1} \frac{2(20)}{186+12} = 5.71^\circ$$

Results are shown in Fig. (b).

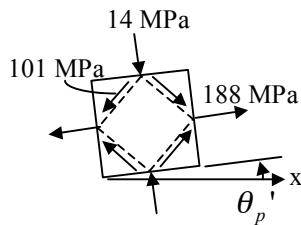


Figure (b)

SOLUTION (1.56)

(a) $\sigma_1 = 96.05 \text{ MPa}$ $\sigma_2 = 23.05 \text{ MPa}$ $\sigma_3 = 0$

(b) $(\tau_{12})_{\max} = \frac{1}{2}(\sigma_1 - \sigma_2) = 36.05 \text{ MPa}$

$$(\tau_{13})_{\max} = \frac{1}{2}(\sigma_1 - \sigma_3) = 48.03 \text{ MPa}$$

$$(\tau_{23})_{\max} = \frac{1}{2}(\sigma_2 - \sigma_3) = 11.98 \text{ MPa}$$

Plane of $(\tau_{12})_{\max}$ is shown in Fig. (a). Other maximum shear planes are sketched similarly.

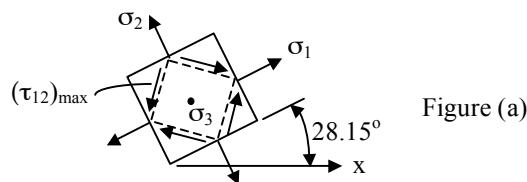



Figure (a)

SOLUTION (1.57)

$$A = 2\pi rt = 2\pi(60)(4) = 1508 \text{ mm}^2$$

$$\sigma_y = \frac{pr}{t} = \frac{2(60)}{4} = 30 \text{ MPa}$$

$$\sigma_x = -\frac{P}{A} + \frac{pr}{2t} = -\frac{50(10^3)}{1508(10^{-6})} + 15 = 11,684 \text{ MPa}$$

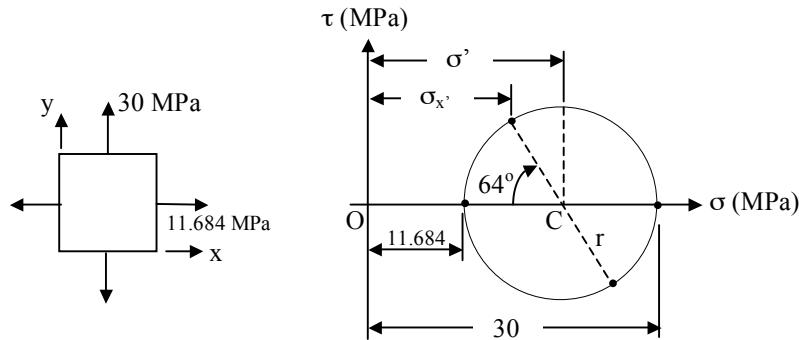

$$\sigma' = \frac{1}{2}(30 + 11.684) = 20.84 \text{ MPa}$$

$$r = \frac{1}{2}(30 - 11.684) = 9.158 \text{ MPa}$$

(a) $\sigma_{x'} = \sigma' - r \cos 64^\circ = 16.82 \text{ MPa}$

(b) $\tau_{x'y'} = r \sin 64^\circ = 8.231 \text{ MPa}$

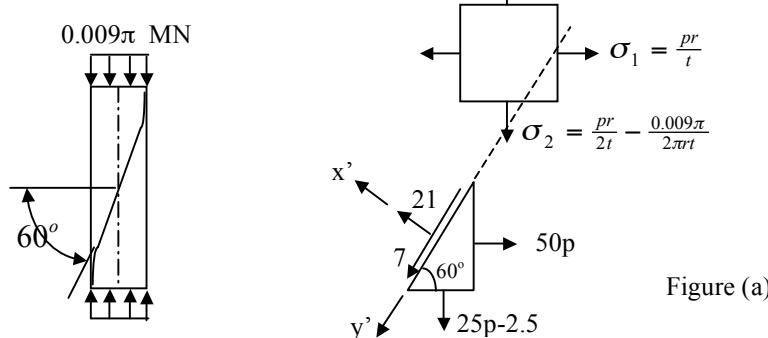
SOLUTION (1.58)


Figure (a)

Equilibrium of x' and y' directed forces results in (Fig. a):

$$21 - 50p(\frac{\sqrt{3}}{2})^2 - (25p - 2.5)(\frac{1}{2})^2 = 0$$

or

$$p_{all} = 494 \text{ kPa}$$

and

$$7 + (25p - 2.5)(\frac{\sqrt{3}}{4}) - 50p(\frac{\sqrt{3}}{4}) = 0$$

from which

$$p = 547 \text{ kPa}$$

SOLUTION (1.59)

Direction cosines are:

$$\begin{aligned}l_1 &= \sqrt{3}/2 & m_1 &= 1/2 & n_1 &= 0 \\l_2 &= -1/2 & m_2 &= \sqrt{3}/2 & n_2 &= 0 \\l_3 &= 0 & m_3 &= 0 & n_3 &= 1\end{aligned}$$

Equation (1.28a) is thus

$$\sigma_{x'} = 20(\frac{3}{4}) + 0 + 0 + 2(12)(\frac{\sqrt{3}}{2})(\frac{1}{2}) + 0 + 0 = 25.392 \text{ MPa}$$

Similarly, applying Eqs. (1.28b) through (1.28e), we obtain $[\tau_{i'j'}]$:

$$\begin{bmatrix} 25.342 & -2.66 & -7.99 \\ -2.66 & -5.392 & 16.16 \\ -7.99 & 16.16 & 6 \end{bmatrix} \text{ MPa}$$



Then, Eqs. (1.34) result in

$$\begin{aligned}I_1 &= I_1' = 26 \text{ MPa} & I_2 &= I_2' = -349 \text{ (MPa)}^2 \\I_3 &= I_3' = -6464 \text{ (MPa)}^3\end{aligned}$$



SOLUTION (1.60)

Direction cosines are:

$$\begin{aligned}l_1 &= \sqrt{3}/2 & m_1 &= 1/2 & n_1 &= 0 \\l_2 &= -1/2 & m_2 &= \sqrt{3}/2 & n_2 &= 0 \\l_3 &= 0 & m_3 &= 0 & n_3 &= 1\end{aligned}$$

Equation (1.28a) is therefore

$$\begin{aligned}\sigma_{x'} &= 60(\frac{3}{4}) + 0 + 0 + 2(40)(\frac{\sqrt{3}}{2})(\frac{1}{2}) + 0 + 0 \\&= 20[(\frac{9}{4}) + \sqrt{3}] = 79.64 \text{ MPa}\end{aligned}$$

Similarly, applying Eqs. (1.28b) through (1.28e), we obtain $[\tau_{i'j'}]$:

$$\begin{bmatrix} 79.64 & -5.98 & -44.64 \\ -5.98 & -19.64 & -2.68 \\ -44.64 & -2.68 & 20 \end{bmatrix} \text{ MPa}$$



Then, Eqs. (1.34) lead to

$$\begin{aligned}I_1 &= I_1' = 80 \text{ MPa} & I_2 &= I_2' = -2400 \text{ (MPa)}^2 \\I_3 &= I_3' = 8000 \text{ (MPa)}^3\end{aligned}$$



SOLUTION (1.61)

Referring to Appendix B:

$$\sigma_1 = 13.212 \text{ MPa} \quad \sigma_2 = 5.684 \text{ MPa} \quad \sigma_3 = -8.896 \text{ MPa}$$

and

$$l_1 = 0.9556 \quad m_1 = 0.1688 \quad n_1 = 0.2416$$

Thus,

$$\tau_{\max} = \frac{1}{2}(\sigma_1 - \sigma_3) = 11.054 \text{ MPa}$$
 ◀

SOLUTION (1.62)

Referring to Appendix B:

$$\sigma_1 = 66.016 \text{ MPa} \quad \sigma_2 = 28.418 \text{ MPa} \quad \sigma_3 = -44.479 \text{ MPa}$$
 ◀

and

$$l_1 = 0.9556 \quad m_1 = 0.1688 \quad n_1 = 0.2416$$

SOLUTION (1.63)

Referring to Appendix B:

$$\sigma_1 = 30.493 \text{ MPa} \quad \sigma_2 = 12.485 \text{ MPa} \quad \sigma_3 = -16.979 \text{ MPa}$$

Thus,

$$\tau_{\max} = \frac{1}{2}(\sigma_1 - \sigma_3) = 23.736 \text{ MPa}$$
 ◀

SOLUTION (1.64)

Referring to Appendix B:

$$\sigma_1 = 24.747 \text{ MPa} \quad \sigma_2 = 8.480 \text{ MPa} \quad \sigma_3 = 2.773 \text{ MPa}$$
 ◀

and

$$l_1 = 0.6467 \quad m_1 = 0.3958 \quad n_1 = 0.6421$$

SOLUTION (1.65)

(a) Equation (1.32) becomes

$$\begin{vmatrix} (30 - \sigma_p) & 0 & 20 \\ 0 & -\sigma_p & 0 \\ 20 & 0 & -\sigma_p \end{vmatrix} = 0$$

Expanding,

$$-\sigma_p[\sigma_p(\sigma_p - 30) - 400] = 0$$

(CONT.)

1.65 (CONT.)

or

$$\sigma_p = 0, \quad \sigma_p = -10, \quad \sigma_p = 40$$

Thus

$$\sigma_1 = 40 \text{ MPa}, \quad \sigma_2 = 0, \quad \sigma_3 = -10 \text{ MPa}$$
 ◀

(b) For $\sigma_1 = 40 \text{ MPa}$:

$$(30 - 40)l_1 + (0)m_1 + 20n_1 = 0, \quad l_1 = 2n_1$$

$$(0)m_1 = 0, \quad m_1 = 0$$

The condition $l_1^2 + 0 + n_1^2 = 1$ gives

$$(2n_1)^2 + n_1^2 = 1, \quad n_1 = \frac{1}{\sqrt{5}}$$

Thus

$$l_1 = \frac{2}{\sqrt{5}}, \quad m_1 = 0, \quad n_1 = \frac{1}{\sqrt{5}}$$
 ◀

SOLUTION (1.66)

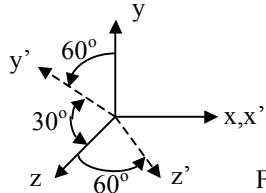


Figure (a)

(a) At point (3,1,5) with respect to xyz axis, we have $[\tau_{ij}]$:

$$\begin{bmatrix} 10 & 0 & 0 \\ 0 & -4 & 0 \\ 0 & 0 & 8 \end{bmatrix} \text{ MPa} \quad (\text{a})$$

Then, Eqs. (1.34) result in

$$I_1 = 14 \text{ MPa} \quad I_2 = 8 \text{ (MPa)}^2 \quad I_3 = -320 \text{ (MPa)}^3$$
 ◀

Direction cosines of x' y' z', referring to Fig. (a) are

$$l_1 = 1 \quad m_1 = 0 \quad n_1 = 0$$

$$l_2 = 0 \quad m_2 = 1/2 \quad n_2 = \sqrt{3}/2$$

$$l_3 = 0 \quad m_3 = -\sqrt{3}/2 \quad n_3 = 1/2$$

Now Eqs. (1.28) and (a) give $[\tau_{i'j'}]$:

$$\begin{bmatrix} 10 & 0 & 0 \\ 0 & 5 & 3\sqrt{3} \\ 0 & 3\sqrt{3} & -1 \end{bmatrix} \text{ MPa}$$
 ◀

(CONT.)

1.66 (CONT.)

Thus, Eqs. (1.34) yield

$$I_1' = 14 \text{ MPa} \quad I_2' = 8 \text{ (MPa)}^2 \quad I_3' = -320 \text{ (MPa)}^3 \quad \blacktriangleleft$$

as before.

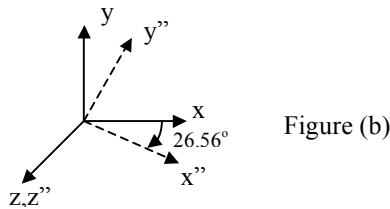


Figure (b)

(b) Direction cosines are (Fig. b):

$$\begin{aligned} l_1 &= 2/\sqrt{5} & m_1 &= -1/\sqrt{5} & n_1 &= 0 \\ l_2 &= 1/\sqrt{5} & m_2 &= 2/\sqrt{5} & n_2 &= 0 \\ l_3 &= 0 & m_3 &= 0 & n_3 &= 1 \end{aligned}$$

With these and Eq. (a), Eqs. (1.28) yield $[\tau_{i'j'}]$:

$$\begin{bmatrix} 7.2 & 5.6 & 0 \\ 5.6 & -1.2 & 0 \\ 0 & 0 & 8 \end{bmatrix} \text{ MPa} \quad \blacktriangleleft$$

Thus, Eqs. (1.34) result in

$$I_1'' = 14 \text{ MPa} \quad I_2'' = 8 \text{ (MPa)}^2 \quad I_3'' = -320 \text{ (MPa)}^3 \quad \blacktriangleleft$$

The I's are thus invariants.

SOLUTION (1.67)

Introducing the given data into Eq. (1.28a), we obtain

$$\begin{aligned} \sigma_{x'} &= 12\left(\frac{1}{2}\right)^2 + 10\left(\frac{\sqrt{3}}{2}\right)^2 + 14(0) + 2[6\left(\frac{1}{2}\right)\left(\frac{\sqrt{3}}{2}\right)] + 0 + 0 \\ &= 15.696 \text{ MPa} \end{aligned}$$

Remaining stress components are determined in a like manner. The result, $[\tau_{i'j'}]$, is

$$\begin{bmatrix} 15.696 & -3.866 & 7.089 \\ -3.866 & 6.304 & -6.294 \\ 7.089 & -6.294 & 14. \end{bmatrix} \text{ MPa} \quad \blacktriangleleft$$

SOLUTION (1.68)

Equations (1.34) become

$$I_1 = \sigma_x + \sigma_y \quad I_2 = \sigma_x \cdot \sigma_y - \tau_{xy}^2 \quad I_3 = 0$$

Equation (1.33) is then

$$\sigma_p^3 - (\sigma_x + \sigma_y)\sigma_p^2 + (\sigma_x\sigma_y - \tau_{xy}^2)\sigma_p = 0$$

or

$$\sigma_p^2 - (\sigma_x + \sigma_y)\sigma_p + (\sigma_x\sigma_y - \tau_{xy}^2) = 0$$

Solution of this quadratic equation is

$$\begin{aligned}\sigma_{1,2} &= \frac{\sigma_x + \sigma_y}{2} \pm \frac{1}{2} [\sigma_x^2 + 2\sigma_x\sigma_y + \sigma_y^2 - 4(\sigma_x + \sigma_y - \tau_{xy}^2)]^{\frac{1}{2}} \\ &= \frac{\sigma_x + \sigma_y}{2} \pm \left[\left(\frac{\sigma_x - \sigma_y}{2} \right)^2 + \tau_{xy}^2 \right]^{\frac{1}{2}}\end{aligned}$$



SOLUTION (1.69)

Referring to Appendix B, we obtain the following values.

$$(a) \quad \sigma_1 = 12.049 \text{ MPa} \quad \sigma_2 = -1.521 \text{ MPa} \quad \sigma_3 = -4.528 \text{ MPa} \quad \blacktriangleleft$$

and

$$l_1 = 0.6184 \quad m_1 = 0.5333 \quad n_1 = 0.5772$$

$$(b) \quad \sigma_1 = 19.238 \text{ MPa} \quad \sigma_2 = 13.704 \text{ MPa} \quad \sigma_3 = 4.648 \text{ MPa} \quad \blacktriangleleft$$

and

$$l_1 = 0.3339 \quad m_1 = 0.3862 \quad n_1 = 0.8599$$

SOLUTION (1.70)

(a) Direction cosines are:



Equation (1.40) is thus

$$\sigma = 100(0.8)^2 + 60(0.6)^2 + 2(40)(0.8)(0.6) = 124 \text{ MPa} \quad \blacktriangleleft$$

Equations (1.26) yield

$$p_x = 100(0.8) + 40(0.6) = 104 \text{ MPa}$$

$$p_y = 40(0.8) + 60(0.6) = 68 \text{ MPa}$$

$$p_z = 80(0.6) = 48 \text{ MPa}$$


Equation (1.41) is then

$$\tau = [104^2 + 68^2 + 48^2 - 124^2]^{\frac{1}{2}} = 48.66 \text{ MPa} \quad \blacktriangleleft$$

(CONT.)

1.70 (CONT.)

(b) Direction cosines are:

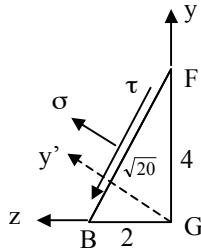

$$l = 0$$
$$m = 2/\sqrt{20} = 0.447$$
$$n = 4/\sqrt{20} = 0.894$$

Equation (1.40) results in

$$\sigma = 60(0.447)^2 + 20(0.894)^2 + 2(80)(0.447)(0.894) = 91.913 \text{ MPa}$$

Equations (1.26) yield

$$p_x = 40(0.447) = 17.88 \text{ MPa}$$

$$p_y = 60(0.447) + 80(0.894) = 98.34 \text{ MPa}$$

$$p_z = 80(0.447) + 20(0.894) = 53.64 \text{ MPa}$$

Equation (1.41) leads to

$$\tau = [17.88^2 + 98.34^2 + 53.66^2 - 91.913^2]^{\frac{1}{2}} = 66.481 \text{ MPa}$$



(c) Direction cosines are:

$$l = 0.512 \quad m = 0.384 \quad n = 0.768$$

Equation (1.40) is therefore

$$\sigma = 100(0.512)^2 + 60(0.384)^2 + 20(0.768)^2 + 2[40(0.512)(0.384) + 80(0.384)(0.768)] = 109.77 \text{ MPa}$$



Equations (1.26) yield

$$p_x = 100(0.512) + 40(0.384) = 66.56 \text{ MPa}$$

$$p_y = 40(0.512) + 60(0.384) + 80(0.768) = 104.96 \text{ MPa}$$

$$p_z = 80(0.384) + 20(0.768) = 46.08 \text{ MPa}$$


Equation (1.41) gives

$$\tau = [66.56^2 + 104.96^2 + 46.08^2 - 109.77^2]^{\frac{1}{2}} = 74.3 \text{ MPa}$$



SOLUTION (1.71)

(a) Direction cosines are:

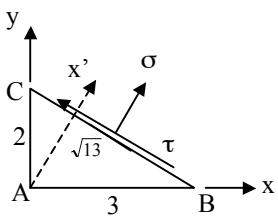

$$l = 2/\sqrt{13} = 0.555$$
$$m = 3/\sqrt{13} = 0.882$$
$$n = 0$$

(CONT.)

1.71 (CONT.)

Equation (1.40) is then

$$\sigma = 100(0.555)^2 + 60(0.832)^2 + 2(40)(0.555)(0.832) = 109.277 \text{ MPa} \quad \blacktriangleleft$$

Equations (1.26) lead to

$$p_x = 100(0.555) + 40(0.832) = 88.78 \text{ MPa}$$


$$p_y = 40(0.555) + 60(0.832) = 72.12 \text{ MPa}$$

$$p_z = 80(0.832) = 66.56 \text{ MPa}$$

Equation (1.41) gives then

$$\tau = [88.78^2 + 72.12^2 + 66.56^2 - 109.277^2]^{\frac{1}{2}} = 74.67 \text{ MPa} \quad \blacktriangleleft$$

(b) Direction cosines are:

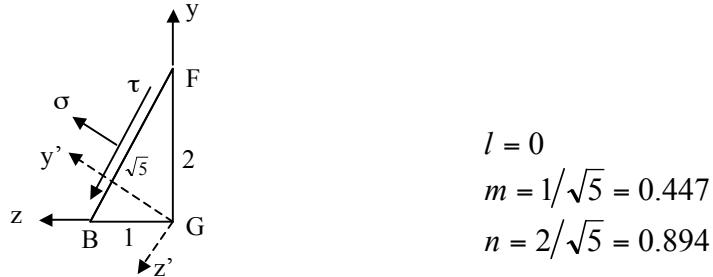

$$\begin{aligned}l &= 0 \\m &= 1/\sqrt{5} = 0.447 \\n &= 2/\sqrt{5} = 0.894\end{aligned}$$

Thus, the results are the same as those obtained in Solution of Prob. 1.70b.

(c) We have $\vec{r}_g = 3\vec{i}$, $\vec{r}_e = 2\vec{j}$, $\vec{r}_a = \vec{k}$.

Equation (P1.70) is therefore

$$\begin{bmatrix} x-3 & y & z \\ -3 & 2 & 0 \\ -3 & 0 & 1 \end{bmatrix} = 0$$

or

$$2x + 3y + 6z = 6$$

Direction cosines are:

$$l = \frac{2}{\sqrt{2^2+3^2+6^2}} = \frac{2}{7} \quad m = \frac{3}{7} \quad n = \frac{6}{7}$$

With these and given stresses, Eqs. (1.40) and (1.26) yield

$$\sigma = 102.449 \text{ MPa} \quad \blacktriangleleft$$

and

$$p_x = 45.714 \text{ MPa} \quad p_y = 105.714 \text{ MPa} \quad p_z = 51.429 \text{ MPa}$$

Substituting the above values into Eq. (1.41), we obtain

$$\tau = 73.582 \text{ MPa} \quad \blacktriangleleft$$

SOLUTION (1.72)

See: Hint, Prob. 1.70:

$$l = \frac{2}{\sqrt{3^2 + l^2 + 2^2}} = \frac{2}{\sqrt{14}} \quad m = \frac{1}{\sqrt{14}} \quad n = -\frac{3}{\sqrt{14}}$$

Equation (1.40) gives

$$\begin{aligned} \sigma &= 20\left(\frac{2}{\sqrt{14}}\right)^2 + 30\left(\frac{1}{\sqrt{14}}\right)^2 + 50\left(-\frac{3}{\sqrt{14}}\right)^2 \\ &\quad + 2[10\left(\frac{2}{\sqrt{14}}\right)\left(\frac{1}{\sqrt{14}}\right) - 10\left(\frac{2}{\sqrt{14}}\right)\left(-\frac{3}{\sqrt{14}}\right)] = 51.43 \text{ MPa} \end{aligned} \quad \blacktriangleleft$$

Equation (1.41):

$$\begin{aligned} \tau &= \left\{ [20\left(\frac{2}{\sqrt{14}}\right) + 10\left(\frac{1}{\sqrt{14}}\right) - 10\left(-\frac{3}{\sqrt{14}}\right)]^2 \right. \\ &\quad \left. + [10\left(\frac{2}{\sqrt{14}}\right) + 30\left(\frac{1}{\sqrt{14}}\right) + 0]^2 + [-10\left(\frac{2}{\sqrt{14}}\right) + 0 + 50\left(-\frac{3}{\sqrt{14}}\right)]^2 - 51.34^2 \right\}^{\frac{1}{2}} \\ &= 7.413 \text{ MPa} \end{aligned} \quad \blacktriangleleft$$

SOLUTION (1.73)

Direction cosines are

$$l = \cos 35^\circ = 0.8192 \quad m = \cos 60^\circ = 0.5 \quad n = \cos 73.6^\circ = 0.2823$$

Equation (1.40) results in

$$\begin{aligned} \sigma &= 60(0.8192)^2 - 40(0.5)^2 + 30(0.2823)^2 \\ &\quad + 2[20(0.8192)(0.5) - 5(0.5)(0.2823) + 10(0.8192)(0.2823)] \\ &= 52.25 \text{ MPa} \end{aligned} \quad \blacktriangleleft$$

Equations (1.26):

$$\begin{aligned} p_x &= 60(0.8192) + 20(0.5) + 10(0.2823) = 61.9725 \text{ MPa} \\ p_y &= 20(0.8192) - 40(0.5) - 5(0.2823) = -5.0287 \text{ MPa} \\ p_z &= 10(0.8192) - 5(0.5) + 30(0.2823) = 14.1618 \text{ MPa} \end{aligned}$$

Equation (1.41) is thus

$$\begin{aligned} \tau &= [(61.9725)^2 + (-5.0287)^2 + (14.1618)^2 - (52.25)^2]^{\frac{1}{2}} \\ &= 36.56 \text{ MPa} \end{aligned} \quad \blacktriangleleft$$

SOLUTION (1.74)

Direction cosines are

$$l = \cos 40^\circ = 0.766 \quad m = \cos 75^\circ = 0.259 \quad n = \cos 54^\circ = 0.588$$

(CONT.)

1.74 (CONT.)

Equation (1.40):

$$\begin{aligned}\sigma &= 40(0.766)^2 + 20(0.259)^2 + 20(0.588)^2 \\ &\quad + 2[40(0.766)(0.259) + 0 + 30(0.766)(0.588)] \\ &= 23.47 + 1.34 + 6.91 + 42.9 \\ &= 74.62 \text{ MPa} \end{aligned}$$



Equation (1.41) gives

$$\begin{aligned}\tau &= \{[40(0.766) + 40(0.259) - 30(0.588)]^2 \\ &\quad + [40(0.766) + 20(0.259) + 0]^2 + [30(0.766) + 0 + 20(0.588)]^2 - 74.62^2\}^{\frac{1}{2}} \\ &= [3436.3 + 1282.9 + 1206.7 - 5568.1]^{\frac{1}{2}} \\ &= 18.93 \text{ MPa} \end{aligned}$$



SOLUTION (1.75)

Note: Planes of maximum shear stresses can be determined upon following a procedure similar to that used in Solution of Prob. 1.56.

(a) From Problem 1.69a:

$$\sigma_1 = 12.049 \text{ MPa} \quad \sigma_2 = -1.521 \text{ MPa} \quad \sigma_3 = -4.528 \text{ MPa}$$

Thus, $(\tau_{13})_{\max} = \frac{1}{2}(\sigma_1 - \sigma_3) = 8.288 \text{ MPa}$

$$(\tau_{12})_{\max} = \frac{1}{2}(\sigma_1 - \sigma_2) = 6.785 \text{ MPa}$$

$$(\tau_{23})_{\max} = \frac{1}{2}(\sigma_2 - \sigma_3) = 1.503 \text{ MPa}$$



(b) From Problem 1.69b:

$$\sigma_1 = 19.237 \text{ MPa} \quad \sigma_2 = 13.704 \text{ MPa} \quad \sigma_3 = 4.648 \text{ MPa}$$

Thus, $(\tau_{13})_{\max} = \frac{1}{2}(\sigma_1 - \sigma_3) = 7.294 \text{ MPa}$

$$(\tau_{12})_{\max} = \frac{1}{2}(\sigma_1 - \sigma_2) = 2.766 \text{ MPa}$$

$$(\tau_{23})_{\max} = \frac{1}{2}(\sigma_2 - \sigma_3) = 4.528 \text{ MPa}$$



SOLUTION (1.76)

We have

$$\sigma_1 = 48 \text{ MPa} \quad \sigma_2 = 36 \text{ MPa} \quad \sigma_3 = -72 \text{ MPa}$$

(a) From Eqs. (1.43) and (1.44):

$$\tau_{oct} = \frac{1}{3}[(48 - 36)^2 + (36 + 72)^2 + (-72 - 48)^2]^{\frac{1}{2}} = 53.96 \text{ MPa}$$

$$\sigma_{oct} = \frac{1}{3}(48 + 36 - 72) = 4 \text{ MPa}$$



(b) Using Eq. (1.45),

$$\tau_{\max} = \frac{1}{2}(48 - 36) = 6 \text{ MPa}$$



SOLUTION (1.77)

$$(a) \begin{vmatrix} (-100 - \sigma_p) & 0 & -80 \\ 0 & (20 - \sigma_p) & 0 \\ -80 & 0 & (20 - \sigma_p) \end{vmatrix} = 0$$

Expanding,

$$(20 - \sigma)[(\sigma + 100)(\sigma - 20) - 6400] = 0$$

and

$$\sigma_1 = 60 \text{ MPa}, \quad \sigma_2 = 20 \text{ MPa}, \quad \sigma_3 = -140 \text{ MPa}$$



(b) Apply Eqs. (1.43), (1.44), and (1.45):

$$\tau_{oct} = \frac{1}{3}[(60 - 20)^2 + (20 + 140)^2 + (-140 - 60)^2]^{\frac{1}{2}} = 86.41 \text{ MPa}$$

$$\sigma_{oct} = \frac{1}{3}(60 + 20 - 140) = -20 \text{ MPa}$$

$$\tau_{max} = \frac{1}{2}(60 + 140) = 100 \text{ MPa}$$



SOLUTION (1.78)

Octahedral and shearing stresses are given by

$$\tau_{oct}^2 = \frac{1}{9}[(\sigma_1 - \sigma_2)^2 + (\sigma_2 - \sigma_3)^2 + (\sigma_3 - \sigma_1)^2]$$

$$\tau_{max}^2 = \frac{1}{4}(\sigma_1 - \sigma_3)^2$$

Let us say, $\tau_{max}^2 > \tau_{oct}^2$. Then

$$(\frac{\sigma_1 - \sigma_3}{2})^2 > \frac{1}{9}[(\sigma_1 - \sigma_2)^2 + (\sigma_2 - \sigma_3)^2 + (\sigma_3 - \sigma_1)^2]$$

or

$$\frac{9}{4}(\sigma_1 - \sigma_3)^2 > [(\sigma_1 - \sigma_2)^2 + (\sigma_2 - \sigma_3)^2 + (\sigma_3 - \sigma_1)^2]$$

Subtracting $(\sigma_1 - \sigma_3)^2$ from both sides and noting that $(\sigma_1 - \sigma_3)^2 = (\sigma_3 - \sigma_1)^2$,

we have

$$\frac{5}{4}(\sigma_1 - \sigma_3)^2 > (\sigma_1 - \sigma_3)^2 + (\sigma_2 - \sigma_3)^2$$

But

$$(\sigma_1 - \sigma_3)^2 > (\sigma_1 - \sigma_2)^2 + (\sigma_2 - \sigma_3)^2$$

Thus,

$$\frac{5}{4}(\sigma_1 - \sigma_3)^2 > (\sigma_1 - \sigma_2)^2 + (\sigma_2 - \sigma_3)^2 \quad (a)$$

The squares of the difference between σ_1 and σ_3 will always be greater than the sum of the squares of the difference between σ_1 and σ_2 , σ_2 and σ_3 , since $\sigma_1 > \sigma_2 > \sigma_3$. Hence, Eq. (a) is true and our assumption is correct. That is

$$\tau_{max} > \tau_{oct}$$



SOLUTION (1.79)

From Solution of Problem 1.64:

$$\sigma_1 = 24.747 \text{ MPa} \quad \sigma_2 = 8.48 \text{ MPa} \quad \sigma_3 = 2.773 \text{ MPa}$$

Applying Eqs. (1.43) and (1.44):

$$\begin{aligned}\tau_{oct} &= \frac{1}{3}[(24.747 - 8.48)^2 + (8.48 - 2.773)^2 + (2.773 - 24.747)^2]^{\frac{1}{2}} \\ &= 9.31 \text{ MPa}\end{aligned}$$

and $\sigma_{oct} = \frac{1}{3}(24.747 + 8.48 + 2.773) = 12 \text{ MPa}$

Therefore $p_{oct} = (9.31^2 + 12^2)^{\frac{1}{2}} = 15.19 \text{ MPa}$

SOLUTION (1.80)

Shearing stress, in terms of principal stresses, is given by

$$\tau^2 = \sigma_1^2 l^2 + \sigma_2^2 m^2 + \sigma_3^2 n^2 - (\sigma_1 l^2 + \sigma_2 m^2 + \sigma_3 n^2)^2 \quad (a)$$

We substitute $n^2 = 1 - m^2 - l^2$ into Eq. (a), calculate its derivatives with respect to l and m , and equate these derivatives to zero:

$$\frac{\partial \tau}{\partial l} = l[(\sigma_1 - \sigma_3)l^2 + (\sigma_2 - \sigma_3)m^2 - \frac{1}{2}(\sigma_3 - \sigma_1)] = 0 \quad (b)$$

$$\frac{\partial \tau}{\partial m} = m[(\sigma_1 - \sigma_3)l^2 + (\sigma_2 - \sigma_3)m^2 - \frac{1}{2}(\sigma_2 - \sigma_3)] = 0 \quad (c)$$

One solution is $l = m = 0$. Solutions for the direction cosines of planes for which τ is a maximum or minimum can also be found as follows.

Take $l = 0$: Eq. (c) gives $m = \pm\sqrt{1/2}$

Take $m = 0$: Eq. (c) gives $l = \pm\sqrt{1/2}$

There are, in general, no solutions of Eqs. (b) and (c) in which l and m are both different from zero, for this case the expressions in brackets cannot both vanish.

By the above procedure we can form the following table.

Direction cosines for planes of τ_{max} and τ_{min}

$l =$	0	0	± 1	0	$\pm\sqrt{1/2}$	$\pm\sqrt{1/2}$
$m =$	0	± 1	0	$\pm\sqrt{1/2}$	0	$\pm\sqrt{1/2}$
$n =$	± 1	0	0	$\pm\sqrt{1/2}$	$\pm\sqrt{1/2}$	0


The first three columns define the planes for τ_{min} , where $\tau = 0$. The last three columns give planes through each principal axes bisecting the angles between the two other principal axes. Substituting the latter direction cosines into Eq. (a), we have

$$(\tau_{23})_{max} = \pm \frac{\sigma_2 - \sigma_3}{2} \quad (\tau_{13})_{max} = \pm \frac{\sigma_1 - \sigma_3}{2}$$

$$(\tau_{12})_{max} = \pm \frac{\sigma_1 - \sigma_2}{2}$$

Similarly, introducing the direction cosines given in the above table into Eq. (1.37), we obtain the normal stresses associated with the maximum shearing stresses:

$$\sigma_{12}' = \frac{\sigma_1 + \sigma_2}{2} \quad \sigma_{13}' = \frac{\sigma_1 + \sigma_3}{2} \quad \sigma_{23}' = \frac{\sigma_2 + \sigma_3}{2}$$

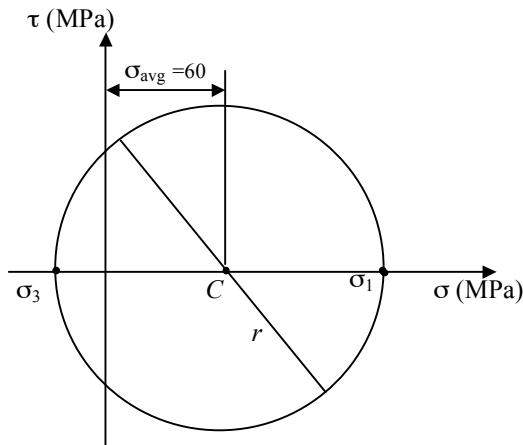SOLUTION (1.81)


$$\begin{aligned}\sigma_{avg} &= \frac{1}{2}(\sigma_x + \sigma_y) \\ &= \frac{1}{2}(100 + 20) = 60 \text{ MPa} \\ r &= \sqrt{\left(\frac{\sigma_x - \sigma_y}{2}\right)^2 + \tau_{xy}^2} \\ &= \sqrt{\left(\frac{100 - 20}{2}\right)^2 + 60^2} \\ &= 72.1 \text{ MPa}\end{aligned}$$

$$\sigma_1 = \sigma_{avg} + R = 132.1 \text{ MPa}$$


$$\sigma_3 = -12.1 \text{ MPa}$$

(a) $\sigma_2 = 30 \text{ MPa}$ $\sigma_1 = 132.1 \text{ MPa}$ $\sigma_3 = -12.1 \text{ MPa}$

$$\begin{aligned}(\tau_{max})_a &= \frac{1}{2}(\sigma_1 - \sigma_3) \\ &= \frac{1}{2}[132.1 - (-12.1)] = 72.1 \text{ MPa}\end{aligned}$$
◀

(b) $\sigma_3 = -30 \text{ MPa}$ $\sigma_1 = 132.1 \text{ MPa}$ $\sigma_2 = -12.1 \text{ MPa}$

$$\begin{aligned}(\tau_{max})_a &= \frac{1}{2}(\sigma_1 - \sigma_3) \\ &= \frac{1}{2}[132.1 - (-30)] = 81 \text{ MPa}\end{aligned}$$
◀

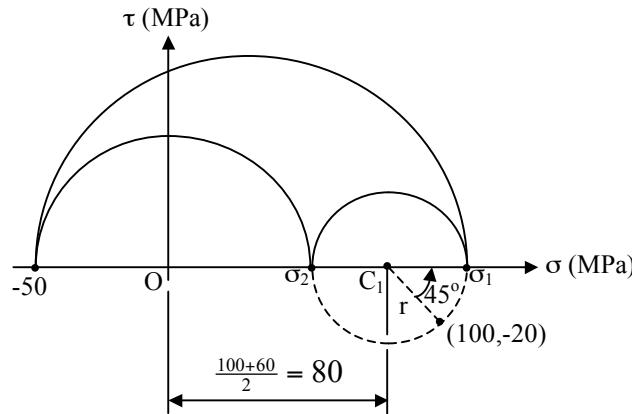SOLUTION (1.82)


(CONT.)

1.82 (CONT.)

From Mohr's circle, we have


$$r = \sqrt{20^2 + 20^2} = 28.3 \text{ MPa}$$

$$\sigma_1 = 108 \text{ MPa} \quad \sigma_2 = 51.7 \text{ MPa}$$

$$\sigma_3 = -50 \text{ MPa} \quad \theta_p' = 22.5^\circ$$



SOLUTION (1.83)

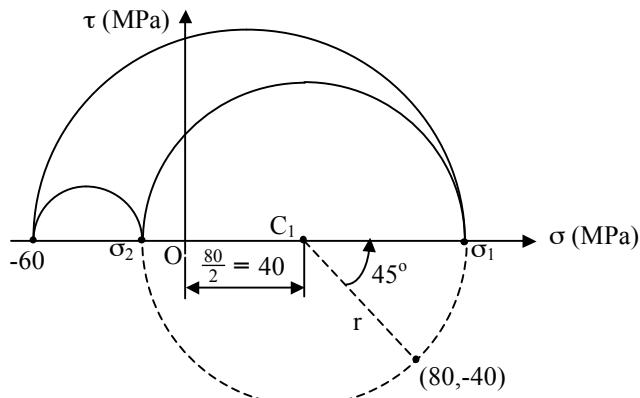

Referring to Mohr's circle:

$$r = \sqrt{40^2 + 40^2} = 56.57 \text{ MPa}$$



$$\theta_p' = 22.5^\circ$$

$$\sigma_1 = 96.57 \text{ MPa} \quad \sigma_2 = 16.57 \text{ MPa}$$



SOLUTION (1.84)

(a) In the yz plane:

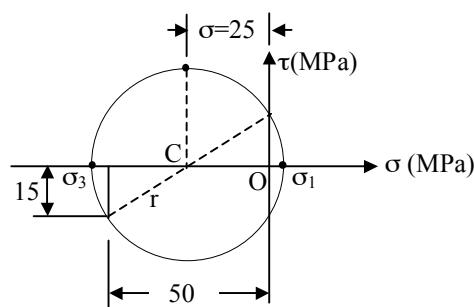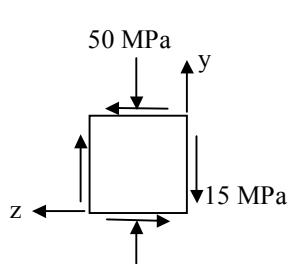

(CONT.)

1.84 (CONT.)

We have

$$r = \sqrt{25^2 + 15^2} = 29.16 \text{ MPa}$$

Thus

$$\sigma_1 = r - \sigma = 29.16 - 25 = 4.16 \text{ MPa}$$

$$\sigma_3 = -r - \sigma = -29.16 - 25 = -54.16 \text{ MPa}$$

$$\sigma_2 = -20 \text{ MPa}$$

(b) Using Eqs. (1.43) and (1.44):

$$\begin{aligned}\tau_{oct} &= \frac{1}{3}[(4.16 + 20)^2 + (-20 + 54.16)^2 + (-54.16 - 4.16)^2]^{\frac{1}{2}} \\ &= 23.92 \text{ MPa}\end{aligned}$$

$$\sigma_{oct} = \frac{1}{3}(4.16 - 20 - 54.16) = -23.33 \text{ MPa}$$

From Eq. (1.45),

$$\tau_{max} = \frac{1}{2}(4.16 + 54.16) = 29.16 \text{ MPa}$$

SOLUTION (1.85)

It is noted that $l^2 + m^2 + n^2 = 1$.

Applying Eq. (1.37), we have

$$\sigma = 35(\frac{3}{13}) - 14(\frac{1}{13}) - 28(\frac{9}{13}) = -12.39 \text{ MPa}$$

Equation (1.39), substituting the given data and the direction cosines determined above, gives

$$\tau = 26.2 \text{ MPa}$$

Surface tractions. Equations (1.48) give

$$p_x = \sigma_1 l = 35(\sqrt{\frac{3}{13}}) = 16.81 \text{ MPa}$$

$$p_y = \sigma_2 m = -14(\sqrt{\frac{1}{13}}) = -3.88 \text{ MPa}$$

$$p_z = \sigma_3 n = -28(\sqrt{\frac{9}{13}}) = -23.30 \text{ MPa}$$

Check: $p^2 = p_x^2 + p_y^2 + p_z^2 = \sigma^2 + \tau^2 = 840 \text{ (MPa)}^2$

Observe that Approach I is more conveniently leads to results.

SOLUTION (1.86)

$$\sigma_{oct} = \frac{1}{3}(40 + 25 + 15) = 26.667 \text{ MPa}$$

$$\tau_{oct} = \frac{1}{3}[(40 - 25)^2 + (25 - 15)^2 + (15 - 40)^2]^{\frac{1}{2}} = 10.274 \text{ MPa}$$

(CONT.)

1.86 (CONT.)

We have $l = m = n = 1/\sqrt{3}$. Note that $l^2 + m^2 + n^2 = 1$.



Surface tractions. Equations (1.48) give

$$p_x = \sigma_1 l = 40\left(\frac{1}{\sqrt{3}}\right) = 23.09 \text{ MPa}$$

$$p_y = \sigma_2 m = 25\left(\frac{1}{\sqrt{3}}\right) = 14.43 \text{ MPa}$$

$$p_z = \sigma_3 n = 15\left(\frac{1}{\sqrt{3}}\right) = 8.66 \text{ MPa}$$

Check:

$$p^2 = p_x^2 + p_y^2 + p_z^2 = \sigma^2 + \tau^2 = 816.7 \text{ (MPa)}^2$$

End of Chapter 1

CHAPTER 2

SOLUTION (2.1)

- (a) Yes.
Eqs. (2.12) are satisfied.
- (b) No.
Eqs. (2.12) are not satisfied.

SOLUTION (2.2)

Apply Eqs. (2.4):

$$\varepsilon_x = 2c \quad \varepsilon_y = -6cy \quad \gamma_{xy} = 2c(x + y)$$

(a) $u_{AB} = \int_1^3 \varepsilon_x dx = 4c = 0.4 \text{ mm}$
 $v_{AD} = \int_{\frac{1}{2}}^2 \varepsilon_y dy = -6c \left. \frac{y^2}{2} \right|_{\frac{1}{2}}^2 = -11.25c = -1.125 \text{ mm}$

Thus,

$$L_{A'B'} = 2000.4 \text{ mm} \quad L_{A'D'} = 1498.875 \text{ mm}$$

(b) $\gamma_{xy} = 2c(1 + \frac{1}{2}) = 300 \mu$

(c) We have

$$u_A = c(2 \times 1 + \frac{1}{4}) = 2.25c \quad v_A = c(1^2 - 3 \times \frac{1}{4}) = 0.25c$$

and

$$x_{A'} = 1 + 2.25c = 1000.225 \text{ mm}$$

$$y_{A'} = 0.5 + 0.25c = 500.025 \text{ mm}$$

SOLUTION (2.3)

Equations (2.4), for the given displacement field, yield $[\varepsilon_{ij}]$:

$$\begin{bmatrix} 2x & 0 & -y/2 \\ 0 & 2z & (2y-x)/2 \\ -y/2 & (2y-x)/2 & 2z \end{bmatrix} c$$

At point (0,2,1), we have $[\varepsilon_{ij}]$:

$$\begin{bmatrix} 0 & 0 & -100 \\ 0 & 200 & 200 \\ -100 & 200 & 200 \end{bmatrix} \mu$$

SOLUTION (2.4)

First two of Eqs. (2.4) give

$$\varepsilon_x = 2a_0xy^2 + a_1y^2 + 2a_2xy$$

$$\varepsilon_y = b_0x^2 + b_1x$$

Equation (2.11):

$$(4a_0 + 2a_1) + (2b_0) = 2c_0x + c_1$$

or

$$2(2a_0 - c_0)x + 2(a_1 + b_0) - c_1 = 0$$

This is satisfied if $x \neq 0$:

$$2a_0 - c_0 = 0, \quad c_0 = 2a_0$$

$$2(a_1 + b_0) - c_1 = 0, \quad c_1 = 2(a_1 + b_0)$$



SOLUTION (2.5)

Equation (2.11) yields

$$2a_1 + 12y^2 + 2b_1 + 12x^2 = 3c_1(x^2 + y^2) + c_1c_2$$

Solving,


$$c_1 = 4 \quad c_2 = \frac{1}{2}(a_1 + b_1)$$



SOLUTION (2.6)

The change in length of bar AB is

$$\delta_{AB} = \varepsilon_{AB}L_{AB} = (-500 \times 10^{-6})(400) = -0.2 \text{ mm}$$

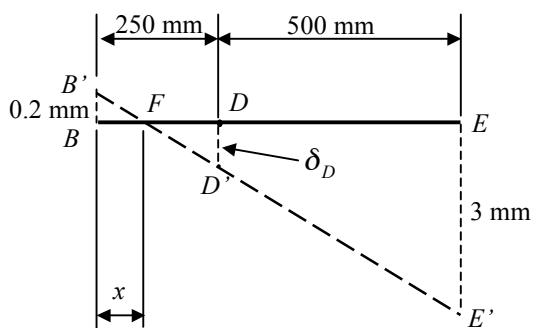

From triangles $B'B F$ and $EE'F$:

$$\frac{0.2}{x} = \frac{3}{750 - x}, \quad x = 117.2 \text{ mm}$$


From triangles $DD'F$ and $EE'F$:

$$\frac{132.8}{\delta_D} = \frac{632.8}{3}, \quad \delta_D = 0.63 \text{ mm}$$

Thus

$$\varepsilon_{CD} = \frac{\delta_D}{L_{CD}} = \frac{0.63}{500} = 1260 \mu$$

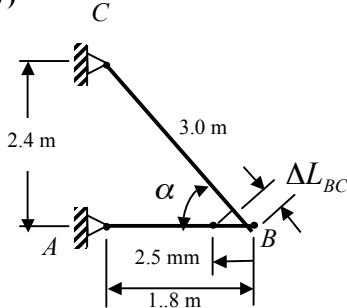

SOLUTION (2.7)


$$\varepsilon_{AB} = \frac{\Delta L_{AB}}{L_{AB}} = -\frac{2.5}{1800} = -1389 \mu$$

$$\varepsilon_{BC} = \frac{-\Delta L_{BC}}{L_{BC}} = \frac{-0.0025 \cos \alpha}{3.0}$$

$$= \frac{-0.0025(1.8/3.0)}{3.0} = -500 \mu$$



SOLUTION (2.8)

(a) $\varepsilon_x = \frac{2.8}{2000} = 1400 \mu$

$$\varepsilon_y = \frac{-1.3}{1000} = -1300 \mu$$

$$\gamma_{xy} = 0$$



(b) $ACB = 90^\circ$

$$A'C'B' = 2 \tan^{-1} \frac{1.0014}{0.9987} = 90.1547^\circ$$

$$\begin{aligned} \gamma &= 90^\circ - 90.1547^\circ = -0.1547^\circ = -2.7 \times 10^{-3} \text{ rad} \\ &= -2700 \mu \end{aligned}$$



SOLUTION (2.9)

(a) Equations (2.4) give

$$\varepsilon_x = \frac{\partial u}{\partial x} = \frac{0.175-0.075}{150} = 667 \mu$$

$$\varepsilon_y = \frac{\partial v}{\partial y} = \frac{0.025-(-0.05)}{100} = 750 \mu$$



and

$$\gamma_{xy} = \frac{0-0.075}{100} + \frac{[-0.125-(-0.05)]}{150} = -1250 \mu$$



(b) Equation (2.16) is therefore

$$\varepsilon_{1,2} = \frac{667+750}{2} \pm \left[\left(\frac{667-750}{2} \right)^2 + 625^2 \right]^{\frac{1}{2}}$$

or

$$\varepsilon_1 = 1335 \mu \quad \varepsilon_2 = 82 \mu$$



When $\theta_p = \frac{1}{2} \tan^{-1} \frac{-1250}{667-750} = 43.1^\circ$

and stresses are substituted into Eq. (2.14a), we obtain $\varepsilon_{x'} = 82 \mu$. Thus,

$$\theta_p' = 43.1^\circ$$



SOLUTION (2.10)

Use Eq. (2.16) with the strains obtained in Example 2.1:

$$\varepsilon_{1,2} = \frac{1250-2000}{2} \pm \left[\left(\frac{1250+2000}{2} \right)^2 + 750^2 \right]^{\frac{1}{2}}$$

or $\varepsilon_1 = 1415 \mu$ $\varepsilon_2 = -2165 \mu$

Apply Eq. (2.15):

$$\theta_p = \frac{1}{2} \tan^{-1} \frac{-1500}{1250-2000} = 12.39^\circ$$

Substituting this angle and the stresses, Eq. (2.14a), gives 1415μ .

Thus,

$$\theta_p' = 12.39^\circ$$

SOLUTION (2.11)

We have, using Eqs. (2.3):

$$\varepsilon_x = \frac{\partial u}{\partial x} = \frac{0.004}{20} = 200 \mu$$

$$\varepsilon_y = \frac{\partial v}{\partial y} = \frac{-0.003}{12} = -250 \mu$$

and

$$\gamma_{xy} = \frac{\partial v}{\partial x} + \frac{\partial u}{\partial y} = -1000 - 500 = -1500 \mu$$

Then, Eq. (2.16) yields

$$\varepsilon_{1,2} = \frac{200-250}{2} \pm \left[\left(\frac{200+250}{2} \right)^2 + (-750)^2 \right]^{\frac{1}{2}}$$

or

$$\varepsilon_1 = 758 \mu \quad \varepsilon_2 = -808 \mu$$


Apply Eq. (2.15):

$$\theta_p = \frac{1}{2} \tan^{-1} \frac{-1500}{200+250} = 36.65^\circ$$

For this angle, Eq. (2.14a) gives $\varepsilon_{x'} = 758 \mu$. Therefore,

$$\theta_p' = -36.65^\circ$$

SOLUTION (2.12)

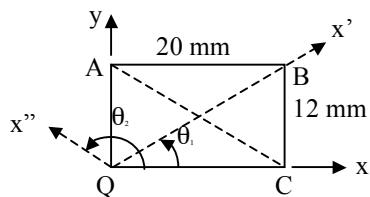

We have, from geometry:

$$AC = QB = 23.32 \text{ mm}$$

$$\theta_1 = 30.96^\circ \quad \theta_2 = 149.04^\circ$$

Equation (2.14a) leads to

$$\varepsilon_{x'} = \frac{300+500}{2} + \frac{300-500}{2} \cos 61.92^\circ + 100 \sin 61.92^\circ = 441 \mu$$

(CONT.)

2.12 (CONT.)

Thus,

$$\Delta_{QB} = 441 \mu(23.32) = 0.01 \text{ mm}$$


Similarly,

$$\varepsilon_{x''} = 400 - 100 \cos 298.08^\circ + 100 \sin 298.08^\circ = 265 \mu$$

and

$$\Delta_{AC} = 265 \mu(23.32) = 0.006 \text{ mm}$$

SOLUTION (2.13)

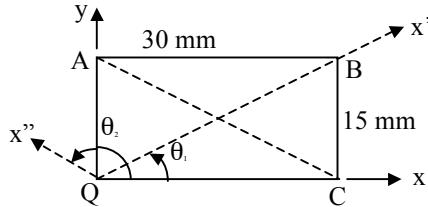

We find, from geometry:

$$AC = QB = 33.54 \text{ mm}$$

$$\theta_1 = 26.56^\circ \quad \theta_2 = 153.44^\circ$$

Equation (2.14a) gives

$$\varepsilon_{x'} = \frac{400+200}{2} + \frac{400-200}{2} \cos 53.12^\circ + 150 \sin 53.12^\circ = 240 \mu$$

Hence,

$$\Delta_{QB} = 240 \mu(33.54) = 0.008 \text{ mm}$$


In a like manner,

$$\varepsilon_{x''} = 300 + 100 \cos 306.88^\circ - 150 \sin 306.88^\circ = 480 \mu$$

and

$$\Delta_{AC} = 480 \mu(33.54) = 0.016 \text{ mm}$$

SOLUTION (2.14)

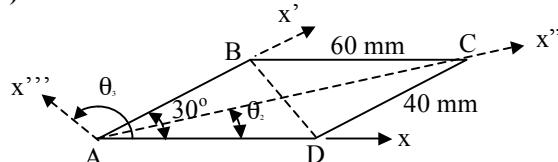

We obtain, from geometry:

$$AC = 96.73 \text{ mm} \quad BD = 32.29 \text{ mm}$$

$$\theta_2 = 11.93^\circ \quad \theta_3 = 141.73^\circ$$

From Solution of Problem 1.42:

$$\sigma_x = 3.464\tau_0 \quad \sigma_y = 0 \quad \tau_{xy} = \tau_0$$

Thus,

(CONT.)

2.14 (CONT.)

$$\varepsilon_x = \frac{3.464(70 \times 10^6)}{200(10^9)} = 1212 \mu$$

$$\varepsilon_y = -0.3(1212) = -364 \mu$$

$$\gamma_{xy} = \frac{2(1+0.3)(70 \times 10^6)}{200(10^9)} = 910 \mu$$

(a) $\varepsilon_{x'} = \frac{1212-364}{2} + \frac{1212+364}{2} \cos 60^\circ + 455 \sin 60^\circ = 1212 \mu$
 $\Delta_{AB} = 1212 \mu(40) = 0.05 mm$

(b) $\varepsilon_{x''} = 424 + 788 \cos 23.86^\circ + 455 \sin 23.86^\circ = 1328.7 \mu$
 $\Delta_{AC} = 1328.7 \mu(96.73) = 0.13 mm$

Similarly,

$$\varepsilon_{x'''} = 424 + 788 \cos 283.46^\circ + 455 \sin 283.46^\circ = 164.92 \mu$$

$$\Delta_{BD} = 164.92(32.29) = 0.005 mm$$

(c) $\varepsilon_{1,2} = \frac{1212-364}{2} \pm \left[\left(\frac{1212+364}{2} \right)^2 + 455^2 \right]^{\frac{1}{2}}$

or

$$\varepsilon_1 = 1334 \mu \quad \varepsilon_2 = 486 \mu$$

Substitution of

$$\theta_p' = \frac{1}{2} \tan^{-1} \frac{910}{1212+364} = 15^\circ$$

into Eq. (2.14a) yields 1334μ .

SOLUTION (2.15)

(a) We have

$$\gamma_{\max} = 400 - 200 = 200 \mu$$

Maximum shearing strain occurs on a plane oriented at 45° from the plane of principal strains.

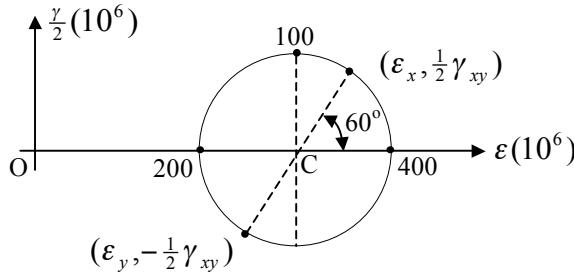


Figure (a)

(b) From Mohr's circle Fig. (a):

$$\varepsilon_x = 300 + 100 \cos 60^\circ = 350 \mu$$

$$\varepsilon_y = 300 - 100 \cos 60^\circ = 250 \mu$$

$$\gamma_{xy} = -(400 - 200) \sin 60^\circ = -173 \mu$$

SOLUTION (2.16)

We have $u_B = 3 \text{ mm}$ and $v_B = 1.5 \text{ mm}$.

(a) Take: $u = c_1 xy$ $v = c_2 xy$

Hence,

$$3(10^{-3}) = c_1(3 \times 2), \quad c_1 = 500(10^{-6})$$

$$1.5(10^{-3}) = c_2(3 \times 2), \quad c_2 = 250(10^{-6})$$

Thus,

$$u = 500(10^{-6})xy \quad v = 250(10^{-6})xy$$



(b) Using Eqs. (2.3),

$$\varepsilon_x = 500 \mu y \quad \varepsilon_y = 250 \mu x \quad \gamma_{xy} = 250 \mu(2x + y)$$

which satisfy Eq. (2.11): the strain field is possible.

At point B, we thus have

$$(\varepsilon_x)_B = 1000 \mu \quad (\varepsilon_y)_B = 750 \mu \quad (\gamma_{xy})_B = 2000 \mu$$



(c) We obtain $\theta = \tan^{-1} \frac{2}{3} = 33.69^\circ$.

Equation (2.14a) is therefore

$$\varepsilon_{x'} = 875 + 125 \cos 67.38^\circ + 1000 \sin 67.38^\circ = 1846 \mu$$

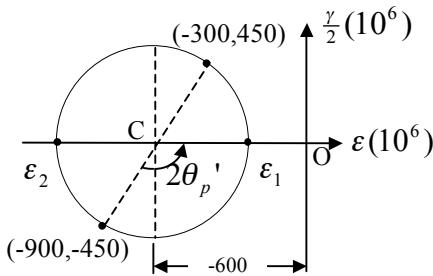
SOLUTION (2.17)


Figure (a)

Refer to Mohr's circle (Fig. a):

$$\varepsilon_{1,2} = -600 \pm [(300)^2 + (450)^2]^{\frac{1}{2}}$$

or

$$\varepsilon_1 = -59 \mu \quad \varepsilon_2 = -1141 \mu$$

and

$$2\theta_p'' = \tan^{-1} \frac{450(2)}{-(900-300)} = -56.31^\circ$$

or

$$\theta_p' = 61.85^\circ$$



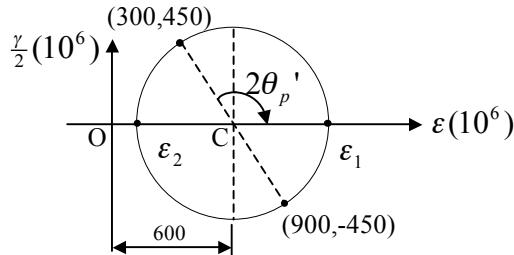
SOLUTION (2.18)


Figure (a)

Referring to Mohr's circle shown in Fig. (a), we obtain

$$\varepsilon_{1,2} = 600 \pm [(300)^2 + (450)^2]^{\frac{1}{2}}$$

from which

$$\varepsilon_1 = 1141 \mu \quad \varepsilon_2 = 59 \mu$$

and

$$2\theta_p' = \tan^{-1} \frac{450(2)}{900-300} = 56.31^\circ$$

or

$$\theta_p' = -61.85^\circ$$

SOLUTION (2.19)

Referring to Fig. P2.19,

$$u_A = -0.0005 = c_1(3 \times 1 \times 2), \quad c_1 = -83.3(10^{-6})$$

$$v_A = 0.0003 = c_2(6), \quad c_2 = 50(10^{-6})$$

$$w_A = -0.0006 = c_3(6), \quad c_3 = -100(10^{-6})$$

Hence,

$$u = -83.3(10^{-6})xyz \quad v = 50(10^{-6})xyz \quad w = -100(10^{-6})xyz$$

(a) Using Eqs. (2.4), we thus have

$$\varepsilon_x = -83.3\mu yz \quad \varepsilon_y = 50\mu xz \quad \varepsilon_z = -100\mu xy$$

$$\gamma_{xy} = (-83.3xz + 50yz) \mu \quad \gamma_{xz} = (-100yz - 83.3xy) \mu$$

$$\gamma_{yz} = (50xy - 100xz) \mu$$

This foregoing expressions satisfy Eqs. (2.12): the strain field is possible.

Substitute $x=-3$ m, $y=1$ m, and $z=2$ m into the above equations to obtain strains at A, $[\varepsilon_{ij}]$:

$$\begin{bmatrix} -167 & -200 & -225 \\ -200 & 300 & -225 \\ -225 & -225 & -300 \end{bmatrix} \mu$$

(CONT.)

2.19 (CONT.)

- (b) Let, for example, x' -axis lie along the line from A to B (Fig. P2.19). The direction cosines of AB are

$$l_1 = -\frac{3}{\sqrt{13}} \quad m_1 = 0 \quad n_1 = -\frac{2}{\sqrt{13}}$$

Thus, Eq. (2.18a):

$$\begin{aligned} \varepsilon_{x'} &= \varepsilon_x l_1^2 + \varepsilon_z n_1^2 + \gamma_{xz} l_1 n_1 \\ &= -167\left(\frac{9}{13}\right) - 300\left(\frac{4}{13}\right) - 450\left(\frac{-3}{\sqrt{13}}\right)\left(\frac{-2}{\sqrt{13}}\right) \\ &= -416 \mu \end{aligned}$$



- (c) Let y' -axis be placed along AC (Fig. P2.19). The direction cosines of AC are

$$m_2 = -1 \quad l_2 = 0 \quad n_2 = 0$$

Equation (2.18b) is therefore

$$\begin{aligned} \gamma_{x'y'} &= \gamma_{xy} l_1 m_2 + \gamma_{yz} n_1 m_2 \\ &= -400\left(\frac{-3}{\sqrt{13}}\right)(-1) - 450\left(\frac{-2}{\sqrt{13}}\right)(-1) \\ &= -582 \mu \end{aligned}$$



Negative sign shows that the angle BAC has increased.

SOLUTION (2.20)

We now have (Fig. P2.19):

$$u_A = 0.0006 = c_1(3 \times 1 \times 2), \quad c_1 = 100(10^{-6})$$

$$v_A = -0.0003 = c_2(6), \quad c_2 = -50(10^{-6})$$

$$w_A = -0.0004 = c_3(6), \quad c_3 = -66.7(10^{-6})$$

Hence,

$$u = 100(10^{-6})xyz \quad v = -50(10^{-6})xyz \quad w = -66.7(10^{-6})xyz$$

- (a) Applying Eqs. (2.4), we obtain

$$\varepsilon_x = 100 \mu yz \quad \varepsilon_y = -50 \mu xz \quad \varepsilon_z = -66.7 \mu xy$$

$$\gamma_{xy} = (100xz - 50yz) \mu \quad \gamma_{xz} = (-66.7yz + 100xy) \mu$$

$$\gamma_{yz} = (100xy - 66.7xz) \mu$$

These expressions satisfy Eqs. (2.12): the strain field is possible.

Introducing $x=3$ m, $y=1$ m, and $z=2$ m into the above equations we find strains at A, $[\varepsilon_{ij}]$:

$$\begin{bmatrix} 200 & 250 & 83.5 \\ 250 & -300 & -275 \\ 83.5 & -275 & -200 \end{bmatrix} \mu$$



- (b) Let, for instance, x' -axis lie along the line from A to B (Fig. P2.19). The direction cosines of AB are

$$l_1 = -\frac{3}{\sqrt{13}} \quad m_1 = 0 \quad n_1 = -\frac{2}{\sqrt{13}}$$

(CONT.)

2.20 (CONT.)

Therefore, Eq. (2.18a):

$$\begin{aligned}\varepsilon_{x'} &= \varepsilon_x l_1^2 + \varepsilon_z n_1^2 + \gamma_{xz} l_1 n_1 \\ &= 200\left(\frac{9}{13}\right) - 200\left(\frac{4}{13}\right) - 167\left(\frac{-3}{\sqrt{13}}\right)\left(\frac{-2}{\sqrt{13}}\right) \\ &= -154 \text{ } \mu\end{aligned}$$



(c) Let y' -axis be placed along (Fig. P2.19). The direction cosines of AC are

$$m_2 = -1 \quad l_2 = 0 \quad n_2 = 0$$

Equation (2.18b) is thus

$$\begin{aligned}\gamma_{x'y'} &= \gamma_{xy} l_1 m_2 + \gamma_{yz} n_1 m_2 \\ &= 500\left(\frac{-3}{\sqrt{13}}\right)(-1) - 550\left(\frac{-2}{\sqrt{13}}\right)(-1) \\ &= 111 \text{ } \mu\end{aligned}$$



Positive sign means that the angle BAC has decreased.

SOLUTION (2.21)

(a) Applying Eqs. (2.21),

$$J_1 = 200 - 100 - 400 = -300 \text{ } \mu$$



$$J_2 = (-2 - 8 + 4 - 9 - 4 - 25)(10^4) = -44(10^4) \text{ } (\mu)^2$$

and

$$J_3 = \begin{vmatrix} 200 & 300 & 200 \\ 300 & -100 & 500 \\ 200 & 500 & -400 \end{vmatrix} = 58(10^6) \text{ } (\mu)^3$$



(b) Table of direction cosines:

	x	y	z
x'	$\sqrt{3}/2$	$1/2$	0
y'	$-1/2$	$\sqrt{3}/2$	0
z'	0	0	1

Thus, using Eqs. (2.18a),

$$\begin{aligned}\varepsilon_{x'} &= \varepsilon_x l_1^2 + \varepsilon_y m_1^2 + \gamma_{xy} l_1 m_1 \\ &= 200\left(\frac{\sqrt{3}}{2}\right)^2 - 100\left(\frac{1}{2}\right)^2 + 600\left(\frac{\sqrt{3}}{2}\right)\left(\frac{1}{2}\right) = 385 \text{ } \mu\end{aligned}$$



(c) Use Table B.1 (with $\sigma \rightarrow \varepsilon$ and $\tau \rightarrow \gamma/2$):

$$\varepsilon_1 = 598 \text{ } \mu \quad \varepsilon_2 = -126 \text{ } \mu \quad \varepsilon_3 = -772 \text{ } \mu$$



(d) $\gamma_{\max} = 598 + 772 = 1370 \text{ } \mu$



SOLUTION (2.22)

(a) Applying Eqs. (2.21),

$$J_1 = 400 + 0 + 600 = 1(10^3) \mu$$

$$J_2 = (0 + 24 + 0 - 1 - 4 - 0)(10^4) = 19(10^4) (\mu)^2$$

and

$$J_3 = \begin{vmatrix} 400 & 100 & 0 \\ 100 & 0 & -200 \\ 0 & -200 & 600 \end{vmatrix} = -22(10^6) (\mu)^3$$

(b) Using Eq. (2.18a),

$$\varepsilon_x = 400\left(\frac{\sqrt{3}}{2}\right)^2 + 200\left(\frac{\sqrt{3}}{2}\right)\left(\frac{1}{2}\right) = 387 \mu$$

(c) Use Table B.1 (with $\sigma \rightarrow \varepsilon$ and $\tau \rightarrow \gamma/2$):

$$\varepsilon_1 = 664 \mu \quad \varepsilon_2 = 416 \mu \quad \varepsilon_3 = -80 \mu$$

$$(d) \quad \gamma_{\max} = 664 + 80 = 744 \mu$$

SOLUTION (2.23)Use Table B.1 (with $\sigma \rightarrow \varepsilon$ and $\tau \rightarrow \gamma/2$):

$$\varepsilon_1 = 1807 \mu \quad \varepsilon_2 = -228 \mu \quad \varepsilon_3 = -679 \mu$$

and

$$l_1 = 0.6184 \quad m_1 = 0.5333 \quad n_1 = 0.5772$$

SOLUTION (2.24)

$$\varepsilon = \frac{\delta}{L} = \frac{0.10}{50} = 2000 \mu$$

$$\sigma = \frac{P}{A} = \frac{16(10^3)}{(\pi/4)(0.012)^2} = 141.5 MPa$$

$$(a) \quad E = \frac{\sigma}{\varepsilon} = \frac{141.5(10^{-6})}{2000(10^{-6})} = 70.8 GPa$$

$$(b) \quad \Delta\delta = \nu\varepsilon d = 0.33(2000 \times 10^{-6})(12) = 7.92(10^{-3}) mm$$

$$e = \varepsilon(1 - 2\nu) = 2000(10^{-6})(1 - 2 \times 0.33) = 6.80(10^{-4})$$

SOLUTION (2.25)

Nominal strain

$$\varepsilon_0 = \frac{0.025}{75} = 333 \mu$$

(CONT.)

2.25 (CONT.)

Nominal stress

$$\sigma_0 = \frac{9(10^3)}{\pi(0.012)^2/4} = 79.577 \text{ MPa}$$

Modulus of elasticity

$$E = \frac{79.577(10^6)}{333(10^{-6})} = 238.97 \text{ GPa}$$


True strain

$$\varepsilon = \ln(1 + 0.000333) = 333 \mu$$

True stress

$$\sigma = 79.577(1 + 0.000333) = 79.603 \text{ MPa}$$

SOLUTION (2.26)

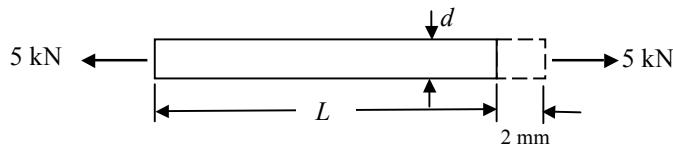

$$\sigma_x = \frac{5(10^3)}{\pi d^2/4} = \frac{20(10^3)}{\pi d^2} = 160 \times 10^6$$

$$d_{\min} = 0.0063 \text{ m} = 6.3 \text{ mm}$$

Also,

$$E = \frac{160 \times 10^6}{0.002/L} = 210 \times 10^9$$

or

$$L_{\min} = 2.625 \text{ m}$$

SOLUTION (2.27)

(a) Axial stress in the bar $\sigma_s = \sigma_a = \sigma$ is

$$\sigma = \varepsilon_s E_s = 600(210) = 126 \text{ MPa}$$

Hence

$$P = \sigma A = 126 \left[\frac{\pi}{4} (40^2) \right] = 158.3 \text{ kN}$$

(b) Axial strain in aluminum equals

$$\varepsilon_a = \frac{\sigma_a}{E_a} = \frac{126(10^6)}{70(10^9)} = 1,800 \mu$$

Therefore

$$\begin{aligned} \delta &= \varepsilon_a L_a + \varepsilon_s L_s \\ &= [1,800(0.5) + 600(1.5)]10^{-6} = 1.8 \text{ mm} \end{aligned}$$

SOLUTION (2.28)

$$A = 2(\pi \times 40^2 / 4) = 2.513\pi \text{ mm}^2$$

$$(a) \quad \sigma = \frac{P}{A} = \frac{600\pi(10^3)}{2513\pi(10^{-6})} = 239 \text{ MPa}$$

Since $\sigma < \sigma_{yp}$, the result is valid.

$$\text{Thus, } \epsilon = \frac{\sigma}{E} = \frac{239(10^6)}{200(10^9)} = 1195 \mu$$

$$\Delta L = L\epsilon = 5(10^3)(1195 \times 10^{-6}) = 5.98 \text{ mm}$$

$$(b) \quad \epsilon_t = -\nu\epsilon = -0.3(1195)(10^{-6}) = -358 \mu$$

$$\Delta d = -358(10^{-6})(40) = -0.014 \text{ mm}$$



SOLUTION (2.29)

$$\epsilon = \frac{\sigma}{E} = \frac{P}{AE} = \frac{-150(10^3)}{70(10^9)(\pi/4)(0.1^2 - 0.08^2)} = -758 \mu$$

$$(a) \quad \Delta L = \epsilon L = -758(10^{-6})(0.4 \times 10^3) = -0.303 \text{ mm}$$



$$(b) \quad \Delta D = \nu(\epsilon D) = 0.3(758)(10^{-6})100 = 0.023 \text{ mm}$$



$$(c) \quad \Delta t = \nu(\epsilon t) = 0.3(758)(10^{-6})10 = 0.0023 \text{ mm}$$



SOLUTION (2.30)

(a) According to assumption 1, the rubber is in triaxial stress:

$$\sigma_x = \sigma_z = -p, \quad \sigma_y = -\frac{Q}{\frac{\pi}{4}d^2} = -\frac{4Q}{\pi d^2}$$

Strains are: $\epsilon_x = \epsilon_z = 0$. The first of Eqs. (2.34) gives


$$\epsilon_x = 0 = \frac{1}{E}[\sigma_x - \nu(\sigma_y + \sigma_z)]$$

or

$$0 = p - \nu\left(-\frac{4Q}{\pi d^2} - p\right)$$

Solving,

$$p = \frac{4\nu Q}{\pi d^2(1-\nu)}$$

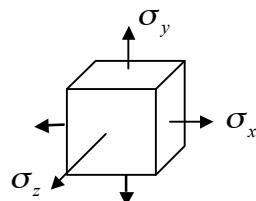

(CONT.)


2.30 (CONT.)

(b) Substituting the data,

$$p = \frac{4(0.3)(5 \times 10^3)}{\pi(0.05)^2(1 - 0.3)} = 1.091 \text{ MPa} \quad (C)$$



SOLUTION (2.31)

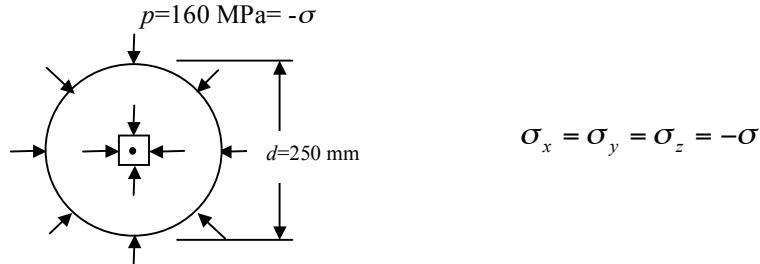

$$V_o = \frac{4}{3}\pi r^3 = \frac{4\pi}{3}(125^3) = 8.18(10^6) \text{ mm}^3$$

$$\begin{aligned} (a) \quad \varepsilon_x &= -\frac{1}{E}[\sigma - \nu(\sigma + \sigma)] = -\frac{\sigma}{E}(1 - 2\nu) \\ &= \frac{-160(10^6)}{70 \times 10^9}(1 - 0.6) = -914 \mu \end{aligned}$$

$$\Delta d = \varepsilon_x d = -914(10^{-6})250 = -0.229 \text{ mm}$$

Decrease in circumference:

$$\pi(\Delta d) = -0.229\pi = -0.72 \text{ mm}$$



$$\begin{aligned} (b) \quad \Delta V &= (1 - 2\nu)\varepsilon_x V_o \\ &= (0.4)(-914)(10^{-6})(8.18 \times 10^6) = -2291 \text{ mm}^3 \end{aligned}$$




SOLUTION (2.32)

(a)

$$\varepsilon' = \frac{500 - 100}{2} = 200 \mu$$

$$\theta_p' = \frac{1}{2} \tan^{-1} \frac{75}{300} = 7^\circ$$

$$\theta_s'' = 45 + 7 = 52^\circ$$

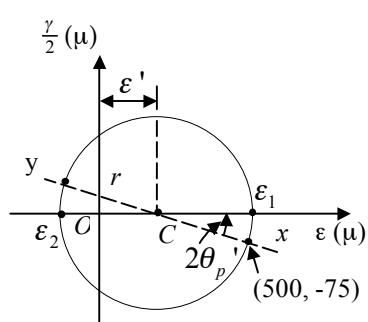

$$r = \sqrt{75^2 + 300^2} = 309 \mu$$

$$\gamma_{\max} = 2R = 618 \mu$$



$$\varepsilon_1 = 200 + 309 = 509 \mu$$

$$\varepsilon_2 = -390 + 200 = -109 \mu$$



(CONT.)

2.32 (CONT.)

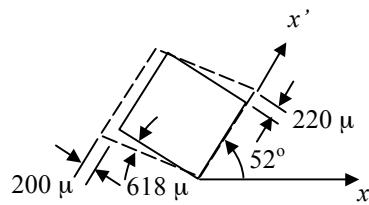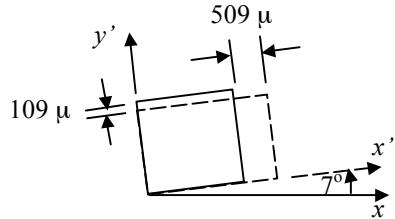


$$(b) \quad \varepsilon_3 = \varepsilon_z = -\frac{0.3}{0.7}(500 - 100) = -172 \mu$$

Thus,

$$(\gamma_{\max})_t = 509 + 172 = 681 \mu \quad \blacktriangleleft$$

SOLUTION (2.33)

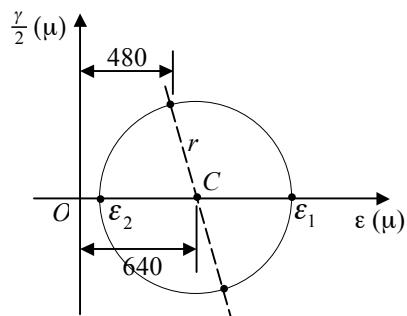

$$\begin{aligned} \varepsilon_{avg} &= \frac{1}{2}(\varepsilon_x + \varepsilon_y) \\ &= \frac{1}{2}(480 + 800) = 640 \mu \\ r &= \sqrt{(640 - 800)^2 + 560^2} \\ &= 582 \mu \end{aligned}$$

$$(a) \quad \varepsilon_{1,2} = \varepsilon_{avg} \pm r$$

$$\varepsilon_1 = 640 + 582 = 1222 \mu \quad \blacktriangleleft$$

$$\varepsilon_2 = 640 - 582 = 58 \mu \quad \blacktriangleleft$$

$$(b) \quad \gamma_{\max} = 2r = 2(582) = 1164 \mu \quad \blacktriangleleft$$

$$(c) \quad (\gamma_{\max})_t = \varepsilon_1 - \varepsilon_3 = \varepsilon_1 - 0 = 1222 \mu \quad \blacktriangleleft$$

SOLUTION (2.34)

$$(a) \quad \sigma_x = \frac{P}{A} = \frac{25(10^3)}{(0.06 \times 0.006)} = 69.4 MPa$$

$$\varepsilon_x = \frac{\sigma_x}{E} = \frac{69.4(10^6)}{200(10^9)} = 347 \mu \quad \blacktriangleleft$$

$$\varepsilon_y = -\nu \varepsilon_x = -(0.3)(347 \times 10^{-6}) = -104 \mu$$

(CONT.)

2.34 (CONT.)

(b) $\varepsilon_{x'} = \frac{1}{2}(\varepsilon_x + \varepsilon_y) + \frac{1}{2}(\varepsilon_x - \varepsilon_y)\cos 2\theta$

For $\theta = -30^\circ$:

$$\varepsilon_{x'} = \frac{1}{2}(347 - 104) + \frac{1}{2}(347 + 104)\cos(-60^\circ) = 182 \mu$$

$$\varepsilon_{y'} = \frac{1}{2}(347 - 104) - \frac{1}{2}(347 + 104)\cos(-60^\circ) = 8.8 \mu$$

(c) For $\theta = -30^\circ$:

$$\begin{aligned}\gamma_{x'y'} &= -(\varepsilon_x - \varepsilon_y)\sin 2\theta \\ &= -(347 + 104)\sin(-60^\circ) = 391 \mu\end{aligned}$$

SOLUTION (2.35)

Substituting $\theta_a = 0^\circ$, $\theta_b = 45^\circ$, and $\theta_c = 90^\circ$, Eqs (2.44) give

$$\begin{aligned}\varepsilon_a &= \varepsilon_x, \quad \varepsilon_c = \varepsilon_y, \quad \varepsilon_b = \frac{1}{2}(\varepsilon_x + \varepsilon_y + \gamma_{xy}) \\ \varepsilon_x &= \varepsilon_a, \quad \varepsilon_y = \varepsilon_c, \quad \gamma_{xy} = 2\varepsilon_b - (\varepsilon_a + \varepsilon_c)\end{aligned}\tag{P2.35}$$

Thus, we have

$$\varepsilon_x = -800 \mu, \quad \varepsilon_y = 400 \mu, \quad \gamma_{xy} = 2(-1000) - (-800 + 400) = -1600 \mu$$

Thus,

$$\varepsilon_{1,2} = \frac{-800 + 400}{2} \pm \sqrt{\left(-\frac{1200}{2}\right)^2 + \left(-\frac{1600}{2}\right)^2} = -200 \pm 1000$$


$$\varepsilon_1 = 800 \mu, \quad \varepsilon_2 = -1200 \mu$$

$$\theta_p = \frac{1}{2} \tan^{-1} \left[\frac{-1600}{-800 - 400} \right] = 26.6^\circ$$


$$\varepsilon_{x'} = -200 - 600 \cos 53.2^\circ - 800 \sin 53.2^\circ = -1200 \mu = \varepsilon_2$$

Thus,

$$\theta_p'' = 26.6^\circ$$

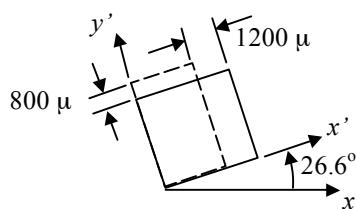

SOLUTION (2.36)

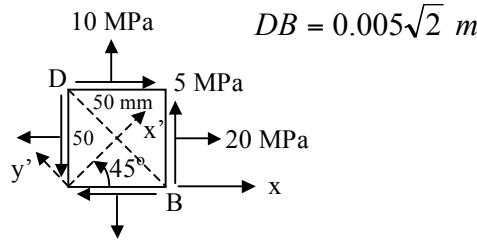

(a) Hooke's law gives

$$\varepsilon_x = \frac{(20 - 0.3 \times 10)}{E} = \frac{17}{E} \quad \varepsilon_y = \frac{(10 - 0.3 \times 20)}{E} = \frac{4}{E}$$

$$\gamma_{xy} = \frac{5(2.6)}{E} = \frac{13}{E}$$

Then, using Eq. (2.14a) with $\theta = \theta + \pi/2$,

$$\varepsilon_{y'} = \frac{1}{2E}(17 + 4) - 0 - \frac{13}{2E} \sin 90^\circ = \frac{4}{E}$$

Thus,

$$\Delta_{BD} = (\varepsilon_{y'})(BD) = \frac{0.283}{E} m \quad \blacktriangleleft$$

(b) Applying Eqs. (1.18a,c):

$$\sigma_{x'} = \frac{30}{2} + \frac{10}{2} \cos 90^\circ + 5 \sin 90^\circ = 20 \text{ MPa}$$

$$\sigma_{y'} = 15 - 5 \cos 90^\circ - 5 \sin 90^\circ = 10 \text{ MPa}$$

As before, Hooke's law yields

$$\varepsilon_{y'} = \frac{(10 - 0.3 \times 20)}{E} = \frac{4}{E}$$

and

$$\Delta_{BD} = (\varepsilon_{y'})(BD) = \frac{0.283}{E} m \quad \blacktriangleleft$$

SOLUTION (2.37)

The generalized Hooke's law gives

$$\varepsilon_x = 0 = \frac{1}{E} [\sigma_x - \nu(\sigma_y + \sigma_z)]$$

$$\varepsilon_z = 0 = \frac{1}{E} [\sigma_z - \nu(\sigma_x + \sigma_y)]$$

$$\text{or } \sigma_x - \nu\sigma_z = \nu\sigma_y \quad -\nu\sigma_x + \sigma_z = \nu\sigma_y$$

Solving,

$$\sigma_x = \sigma_z = \frac{1}{1-\nu}\sigma_y$$

Thus

$$\sigma_x = \sigma_z = -\frac{\nu p}{1-\nu} \quad \blacktriangleleft$$

SOLUTION (2.38)

Using Eqs. (2.46):

$$\varepsilon_{1,2} = \frac{1}{2} \{(-100 + 100) \pm [(-200)^2 + 100^2]^{\frac{1}{2}}\} = \frac{1}{2}(0 \pm 224)$$

(CONT.)

2.38 (CONT.)

or $\varepsilon_1 = 112 \mu$ $\varepsilon_2 = -112 \mu$

$$\sigma_{1,2} = \frac{200(10^3)}{2} [0 \pm (\frac{224}{13})]$$

or

$$\sigma_1 = 17.2 MPa \quad \sigma_2 = -17.2 MPa$$

and

$$\theta_p = \frac{1}{2} \tan^{-1} \frac{100}{-200} = -13.28^\circ$$

Equations (2.44),

$$\varepsilon_x = \varepsilon_a \quad \varepsilon_y = \varepsilon_c \quad \gamma_{xy} = 2\varepsilon_b - \varepsilon_a - \varepsilon_c$$

Equation (2.14a) gives

$$\varepsilon_{x'} = 0 - 100 \cos(-26.56^\circ) + 50 \sin(-26.56^\circ) = -112 \mu$$

Thus,

$$\theta_p'' = -13.28^\circ$$

SOLUTION (2.39)

We have

$$\varepsilon_x + \varepsilon_y = \varepsilon_a + \varepsilon_c = 1200 \mu$$

and the first two of Eqs. (2.44):

$$1000 = \varepsilon_x \cos^2(-15^\circ) + \varepsilon_y \sin^2(-15^\circ) + \gamma_{xy} \sin(-15^\circ) \cos(-15^\circ)$$
$$-250 = \varepsilon_x \cos^2 30^\circ + \varepsilon_y \sin^2 30^\circ + \gamma_{xy} \sin 30^\circ \cos 30^\circ$$

These may be written

$$\varepsilon_y = 1200 - \varepsilon_x$$

$$1000 = 0.933\varepsilon_x + 0.067\varepsilon_y - 0.25\gamma_{xy}$$

$$-250 = 0.75\varepsilon_x + 0.25\varepsilon_y + 0.433\gamma_{xy}$$

Solving,

$$\varepsilon_x = 522 \mu \quad \varepsilon_y = 678 \mu \quad \gamma_{xy} = -1873 \mu$$

SOLUTION (2.40)

(a) We have

$$\varepsilon_c = \varepsilon_y = -50 \mu$$

First two of Eqs. (2.44):

$$400 = \varepsilon_x (\frac{3}{4}) - 50(\frac{1}{4}) + \gamma_{xy} (\frac{1}{2})(\frac{\sqrt{3}}{2})$$

$$300 = \varepsilon_x (\frac{3}{4}) - 50(\frac{1}{4}) + \gamma_{xy} (-\frac{1}{2})(\frac{\sqrt{3}}{2})$$

Solving,

$$\varepsilon_x = 482 \mu \quad \gamma_{xy} = 116 \mu$$

(CONT.)

2.40 (CONT.)

Applying Eq. (2.16),

$$\varepsilon_{1,2} = \frac{483-50}{2} \pm \left[\left(\frac{483+50}{2} \right)^2 + 58^2 \right]^{\frac{1}{2}}$$

or

$$\varepsilon_1 = 489 \text{ } \mu \quad \varepsilon_2 = -56 \text{ } \mu$$

Thus,

$$\gamma_{\max} = \varepsilon_1 - \varepsilon_2 = 545 \text{ } \mu \quad \blacktriangleleft$$

(b) Using Eq. (3.11b) of Chap.3,

$$\varepsilon_z = -\frac{\nu}{1-\nu}(483.50) = -217 \text{ } \mu = \varepsilon_3$$

Hence,

$$(\gamma_{\max})_t = \varepsilon_1 - \varepsilon_3 = 706 \text{ } \mu \quad \blacktriangleleft$$

SOLUTION (2.41)

From Eqs. (2.35), (2.37), and (2.38), we have

$$\nu = \frac{200(10^9)}{2(80 \times 10^9)} - 1 = 0.25$$

$$\lambda = \frac{0.25 \times 200(10^9)}{1.25 \times 0.5} = 80(10^9)$$

and

$$e = 200 + 300 = 500 \text{ } \mu$$

Then, Eqs. (2.36) lead to the following stress components, $[\tau_{ij}]$:

$$\begin{bmatrix} 72 & 16 & 0 \\ 16 & 88 & 64 \\ 0 & 64 & 40 \end{bmatrix} MPa \quad \blacktriangleleft$$

SOLUTION (2.42)

Equation (2.35) yields

$$\nu = \frac{200(10^9)}{2(80 \times 10^9)} - 0.25$$

Then, introducing the given data into the generalized Hooke's law, Eqs. (2.34), we calculate the following strain components, $[\varepsilon_{ij}]$:

$$\begin{bmatrix} 81.25 & -25 & 31.25 \\ -25 & -43.75 & 62.5 \\ 31.25 & 62.5 & 50 \end{bmatrix} \mu \quad \blacktriangleleft$$

SOLUTION (2.43)

Using Eq. (2.35),

$$G = \frac{79(10^9)}{2(1+0.3)} = 26.92 \text{ GPa}$$

For $x=1 \text{ m}$, $y=2 \text{ m}$, and $z=4 \text{ m}$, we obtain $[\tau_{ij}]$:

$$\begin{bmatrix} 34 & 48 & 8 \\ 48 & 5 & 1 \\ 8 & 1 & 5 \end{bmatrix} \text{ MPa}$$

Then, Eqs. (2.34) yield $[\varepsilon_{ij}]$:

$$\begin{bmatrix} 443 & 892 & 149 \\ 892 & -96 & 19 \\ 149 & 19 & -96 \end{bmatrix} \mu$$



SOLUTION (2.44)

Substituting $x=3/4 \text{ m}$, $y=1/4 \text{ m}$, and $z=1/2 \text{ m}$ into Eqs. (d) of Example 1.2, we have $[\tau_{ij}]$:

$$\begin{bmatrix} -0.359 & 2.625 & 0.234 \\ 0.234 & 0.875 & 0 \\ 0.234 & 0 & 0.125 \end{bmatrix} \text{ MPa}$$

Equation (2.35) gives,

$$G = \frac{200(10^9)}{2(1+0.25)} = 80 \text{ GPa}$$

Applying Hooke's law, we compute the strain components $[\varepsilon_{ij}]$:

$$\begin{bmatrix} -3 & 33 & 3 \\ 33 & 5 & 0 \\ 3 & 0 & 0 \end{bmatrix} \mu$$



SOLUTION (2.45)

We have $\sigma_z = 0$. Using Hooke's law:

$$\varepsilon_x = \frac{1}{E}(\sigma_x - \nu\sigma_y) = \frac{1}{70 \times 10^3}(60 - \frac{90}{3}) = 1286 \mu$$

$$\varepsilon_y = \frac{1}{E}(\sigma_y - \nu\sigma_z) = \frac{1}{70 \times 10^3}(90 - \frac{60}{3}) = 1571 \mu$$

$$\varepsilon_z = -\frac{\nu}{E}(\sigma_x + \sigma_y) = -\frac{1}{210 \times 10^3}(60 + 90) = -714 \mu$$

(a) $\Delta_{AB} = \varepsilon_y b = (1571 \times 10^{-6})(400) = 0.628 \text{ mm}$



(b) $e = \varepsilon_x + \varepsilon_y + \varepsilon_z = 1286 + 1571 - 714 = 2143 \mu$

$$V_0 = 300 \times 400 \times 10 = 1.2 \times 10^6 \text{ mm}^3$$

$$\Delta V = eV_0 = (2143 \times 10^{-6})(1.2 \times 10^6) = 2,571.6 \text{ mm}^3$$



SOLUTION (2.46)

(a) Using generalized Hooke's law,

$$\varepsilon_x = \frac{10^6}{200(10^9)} [-60 - 0.3(-50 - 40)] = -165 \mu$$

$$\varepsilon_y = \frac{1}{200(10^3)} [-50 - 0.3(-60 - 40)] = -100 \mu$$

$$\varepsilon_z = \frac{1}{200(10^3)} [-40 - 0.3(-60 - 50)] = -35 \mu$$

Thus,

$$\Delta a = a\varepsilon_x = -0.04125 \text{ mm}$$

$$\Delta b = b\varepsilon_y = -0.02 \text{ mm}$$

$$\Delta c = c\varepsilon_z = -0.00525 \text{ mm}$$

(b) $e = \varepsilon_x + \varepsilon_y + \varepsilon_z = -300 \mu$

and $\Delta V = e(abc) = -2250 \text{ mm}^3$



SOLUTION (2.47)

Applying generalized Hooke's law,

$$\varepsilon_x = \frac{10^6}{70(10^9)} [70 - \frac{1}{3}(-30 - 15)] = 1214 \mu$$

$$\varepsilon_y = \frac{1}{70(10^3)} [-30 - \frac{1}{3}(70 - 15)] = -691 \mu$$

$$\varepsilon_z = \frac{1}{70(10^3)} [-15 - \frac{1}{3}(70 - 30)] = -405 \mu$$

Thus,

$$\Delta a = a\varepsilon_x = 0.1821 \text{ mm}$$

$$\Delta b = b\varepsilon_y = -0.0691 \text{ mm}$$

$$\Delta c = c\varepsilon_z = -0.0304 \text{ mm}$$



(b) $e = \varepsilon_x + \varepsilon_y + \varepsilon_z = 118 \mu$

and

$$\Delta V = e(abc) = 132.75 \text{ mm}^3$$



SOLUTION (2.48)

We have

$$G = \frac{200(10^9)}{2(1+0.3)} = 76.96 \text{ GPa}$$

$$\lambda = \frac{0.3 \times 200(10^9)}{1.3(0.4)} = 111.11(10^9)$$

$$\text{Let } \varepsilon_1 = 5c \quad \varepsilon_2 = 4c \quad \varepsilon_3 = 3c$$

We then obtain $e=12c$.

(CONT.)

2.48 (CONT.)

Using the first of Eqs. (2.36),

$$\sigma_1 = 2G\varepsilon_1 + \lambda e$$

or

$$140(10^6) = 2(76.96 \times 10^9)(5c) + 111.11(10^9)(12c)$$

This yields

$$c = 66.587(10^{-6})$$

Hence,

$$\varepsilon_1 = 332.935 \mu \quad \varepsilon_2 = 266.348 \mu \quad \varepsilon_3 = 199.761 \mu$$

Now applying Eqs. (2.36), we calculate the principal stresses as follows:

$$\sigma_1 = 51.165 + 88.782 = 139.947 MPa$$

$$\sigma_2 = 40.975 + 88.782 = 129.757 MPa$$

$$\sigma_3 = 30.731 + 88.782 = 119.513 MPa$$

Therefore

$$\sigma_3 : \sigma_2 : \sigma_1 = 119.513 : 129.757 : 139.947$$

or

$$\sigma_3 : \sigma_2 : \sigma_1 = 1 : 1.086 : 1.171$$
◀

SOLUTION (2.49)

$$(a) \quad \varepsilon_x = \frac{\sigma}{E} = \frac{\partial u}{\partial x} \quad \varepsilon_y = -\frac{v\sigma}{E} = \frac{\partial v}{\partial y}$$

Integrating;

$$u = \frac{\sigma}{E}x + f(y) \quad v = -\frac{v\sigma}{E}y + g(x) \quad (a)$$

Then

$$\frac{\partial u}{\partial y} + \frac{\partial v}{\partial x} = 0$$

gives

$$\frac{\partial f(y)}{\partial y} + \frac{\partial g(x)}{\partial x} = 0 \text{ or} \quad \frac{\partial g(x)}{\partial x} = -\frac{\partial f(y)}{\partial y} = c$$

Integration leads to

$$g(x) = cx + d \quad f(y) = -cy + e$$

Equations (a) are thus

$$u = \frac{\sigma}{E}x - cy + e \quad v = -\frac{v\sigma}{E}y + cx + d$$

Boundary conditions $u(0,0)=0$ and $v(0,0)=0$ result in $c=d=e=0$. Thus

$$u = \frac{\sigma}{E}x \quad v = -\frac{v\sigma}{E}y$$
◀

$$(b) \quad \varepsilon_x = \frac{\sigma}{E} = \text{const.} \quad \varepsilon_y = -\frac{v\sigma}{E} = \text{const.}$$

Hence $\varepsilon_x = u/x$ and $\varepsilon_y = -v/y$. Therefore

$$u = \frac{\sigma}{E}x \text{ and } v = -\frac{v\sigma}{E}y$$
◀

SOLUTION (2.50)

Equations (2.34) become

$$\varepsilon_x = \frac{cy^2 + vx^2}{E} \quad \varepsilon_y = \frac{-cx^2 + vy^2}{E}$$

Integrating,

$$u(x, y) = \int \varepsilon_x dx = \frac{c}{3E} (3y^2x + vx^3) + g_1(y) \quad (1)$$

$$v(x, y) = \int \varepsilon_y dy = \frac{c}{3E} (3y^2x + vy^3) + g_2(x) \quad (2)$$

$$\text{Given: } \tau_{xy} = 0 \quad \tau_{xy} = \frac{\partial u}{\partial y} + \frac{\partial v}{\partial x} = 0 \quad (3)$$

From Eq. (1),

$$\frac{\partial u}{\partial y} = \frac{dg_1}{dy} + 2 \frac{c}{E} xy \quad (\text{a})$$

Equation (2) leads to

$$\frac{\partial v}{\partial x} = \frac{dg_2}{dx} - 2 \frac{c}{E} xy \quad (\text{b})$$

Substituting Eqs. (a) and (b) into Eq. (3):

$$\frac{dg_1}{dy} = 2 \frac{c}{E} xy + a_1 \quad \frac{dg_2}{dx} = -2 \frac{c}{E} xy + a_1$$

from which, after integration,

$$g_1(y) = \frac{c}{E} xy^2 + a_1 y + a_2 \quad (4)$$

$$g_2(x) = -\frac{c}{E} yx^2 - a_1 x - a_2$$

Constants a_1 and a_2 are obtained upon satisfying the prescribed boundary conditions.

Substitution of Eqs. (4) into Eqs. (1) and (2) yields the solution for displacement field.

SOLUTION (2.51)

Equations (2.39) and (2.35) give

$$K = \frac{E}{3(1-2\nu)} = \frac{2G(1+\nu)}{3(1-2\nu)}$$

$$\begin{aligned} \text{Also, } K &= \frac{E}{3(1-2\nu)} = \frac{2E(1+\nu)}{3(1+\nu)(1-2\nu)} \\ &= \frac{E(3\nu+1-2\nu)}{3(1+\nu)(1-2\nu)} = \frac{\nu E}{(1+\nu)(1-2\nu)} + \frac{E}{3(1+\nu)} \\ &= \lambda + \left(\frac{2G}{3}\right) \end{aligned}$$

Equations (2.39) and (2.35) yield

$$\begin{aligned} G &= \frac{3K(1-2\nu)}{2(1+\nu)} = \frac{E/(1-2\nu)}{(3-1+2\nu)/(1-2\nu)} = \frac{E^2/(1-2\nu)}{E\{[3/(1-2\nu)]-1\}} \\ &= \frac{\frac{3E^2}{3E(1-2\nu)}}{\frac{9E}{3} \frac{1}{1-2\nu} - E} = \frac{3KE}{9K-E} \end{aligned}$$

Equations (2.35) and (2.39) give,

$$E = 2G(1+\nu) \quad E = 3K(1-2E)$$

and

$$\frac{G(3+2G)}{\lambda+G} = \frac{\frac{E}{2(1+\nu)} [3\lambda + \frac{E}{1+\nu}]}{\lambda + \frac{E}{2(1+\nu)}}$$

The above expression, after substituting λ from Eq. (2.38) and simplifying, reduce to E.

(CONT.)

2.51 (CONT.)

From formula (2.39),

$$(1 - 2\nu) = \frac{E}{3K}$$

$$\text{or } \nu = \frac{1}{2} - \frac{E}{6K} = \frac{3K-E}{6K}$$

We also have

$$G = \frac{E}{2G} - 1 \quad (1 + \nu) = \frac{E}{2G}$$

or

$$\nu = \frac{E}{2G} - 1$$

This expression is written as

$$\nu = \frac{3K(1-2\nu)}{2G} - 1 = \frac{3K}{2G} - \frac{6K\nu}{2G} - 1$$

from which

$$\nu + \frac{6K\nu}{2G} = \nu(1 + \frac{6\nu}{2G}) = \frac{3K}{2G} - 1$$

or

$$\nu = \frac{3K-2G}{2(3K+G)}$$

Finally, we write

$$\lambda = \frac{2\nu E}{2(1+\nu)(1-2\nu)} = \frac{2\nu G}{1-2\nu}$$

or

$$(1 - 2\nu)\lambda - 2\nu G = 0$$

This yields,

$$\nu = \frac{\lambda}{2(\lambda+G)}$$

SOLUTION (2.52)

Equations (2.4) yield,

$$\varepsilon_x = \frac{\gamma(a-x)}{E} \quad \varepsilon_y = -\frac{\nu\gamma(a-x)}{E} \quad \gamma_{xy} = -\frac{\nu\gamma}{E} + \frac{\nu\gamma}{E} = 0$$

The stresses are therefore,

$$\sigma_x = \frac{E}{1-\nu^2} (\varepsilon_x + \nu\varepsilon_y) = \gamma(a - x)$$

$$\sigma_y = \frac{E}{1-\nu^2} (\varepsilon_y + \nu\varepsilon_x) = 0$$

$$\tau_{xy} = G\gamma_{xy} = 0$$

At $x=0$ and $x=a$, we have

$$\sigma_x = \gamma a \quad \sigma_x = 0$$

Applying Eqs. (1.48) at $x=a$, we obtain

$$\begin{Bmatrix} p_x \\ p_y \\ p_z \end{Bmatrix} = \begin{bmatrix} 0 & 0 & 0 \\ 0 & 0 & 0 \\ 0 & 0 & 0 \end{bmatrix} \begin{Bmatrix} 1 \\ 0 \\ 0 \end{Bmatrix} = \begin{Bmatrix} 0 \\ 0 \\ 0 \end{Bmatrix}$$

This is, boundary conditions at $x=a$ are satisfied.

(CONT.)

2.52 (CONT.)

At $y = \pm b$, stresses are

$$\sigma_x = \gamma(a - x) \quad \sigma_y = \tau_{xy} = 0$$

and

$$\begin{Bmatrix} p_x \\ p_y \\ p_z \end{Bmatrix} = \begin{bmatrix} (x-a)\gamma & 0 & 0 \\ 0 & 0 & 0 \\ 0 & 0 & 0 \end{bmatrix} \begin{Bmatrix} 0 \\ \pm 1 \\ 0 \end{Bmatrix} = \begin{Bmatrix} 0 \\ 0 \\ 0 \end{Bmatrix}$$

We see that boundary conditions at $y = \pm b$ are also satisfied. ◀

SOLUTION (2.53)

Equations (2.4) give,

$$\begin{aligned} \varepsilon_x &= -\frac{\gamma z}{E}, & \varepsilon_y &= -\frac{\gamma z}{E} \\ \varepsilon_z &= \frac{\gamma z}{E}, & \gamma_{xy} &= \gamma_{yz} = \gamma_{xz} = 0 \end{aligned} \tag{a}$$

Equations (2.12) are satisfied by the above strains.

Equations (2.36) and (a) yield,

$$\sigma_x = 2G\varepsilon_x + \lambda(\varepsilon_x + \varepsilon_y + \varepsilon_z) = 0$$

and

$$\sigma_y = 0 \quad \sigma_z = \gamma z \quad \gamma_{xy} = \tau_{yx} = \tau_{xz} = 0$$

Note that $F_x = F_y = 0$ and $F_z = -\gamma$

Thus, the first of Eqs. (1.14) are satisfied, and the third leads to

$$0 + 0 + \frac{\partial \sigma_z}{\partial z} + F_z = 0 \text{ or } \gamma - \gamma = 0$$

At ends, since x' and z are parallel, $n = \cos(x', z) = \pm 1$.

Thus, boundary conditions (1.48) at $z=L$:

$$p_x = 0 + 0 + 0 = 0 \quad p_y = 0 + 0 + 0 = 0$$


$$p_z = 0 + 0 + \gamma L(1) = \gamma L$$

as required. Similarly, at $z=0$:

$$p_x = 0 \quad p_y = 0 \quad p_z = \gamma(0)(-1) = 0$$

Therefore, all equations of elasticity are satisfied. ◀

SOLUTION (2.54)



Using Eq. (2.59), with $P_1 = P_2$:

$$U = \frac{(P_1 + P_2)^2 L}{2AE}$$

(CONT.)

2.54 (CONT.)

From Example 2.8, with $P_1 = P_2 = P$:

$$U_v = \frac{\sigma^2}{12E} (AL) = \frac{P^2 L}{3AE} \quad U_d = \frac{5\sigma^2}{12E} (AL) = \frac{5P^2 L}{3AE}$$

Hence,

$$U = U_v + U_d = 2 \frac{P^2 L}{AE}$$



SOLUTION (2.55)

We have

$$U_1 = \frac{P^2 L}{2AE} \quad U_2 = \frac{P^2 (L/4)}{2AE} + \frac{P^2 (3L/4)}{2E(2A)} = \frac{5}{8} U_1$$

And

$$U_3 = \frac{P^2 (L/8)}{2AE} + \frac{P^2 (7L/8)}{2E(3A)} = \frac{5}{12} U_1$$

Comparison of these results show that strain energy decreases as the volume of the bar is increased, although all three bars have the same maximum stress.



SOLUTION (2.56)

Stress field is described by

$$\sigma_x = \sigma_y = \sigma_z = -p, \quad \tau_{xy} = \tau_{xz} = \tau_{yz} = 0$$

(a) Equation (2.37) reduces to

$$e = -\frac{3(1-2\nu)p}{E}; \quad -0.005 = -\frac{3[1-(2/3)]p}{110(10^9)}$$

or

$$p = 550 \text{ MPa}$$



(b) Equation (2.52) becomes

$$\begin{aligned} U_0 &= \frac{1}{2E} (p^2 + p^2 + p^2) - \frac{\nu}{E} (p^2 + P^2 + p^2) = \frac{3p^2(1-2\nu)}{2E} \\ &= \frac{3(550 \times 10^6)^2}{2(110 \times 10^9)} \left(1 - \frac{2}{3}\right) = 1.375 \text{ MPa} \end{aligned}$$

Thus,

$$U = U_0 V_0 = 1.375(10^6) \left(\frac{4\pi}{3} \times 0.15^3\right)$$

$$= 19.439 \text{ kN} \cdot \text{m}$$



SOLUTION (2.57)

Substituting the given data into Eq. (2.52), we have

$$\begin{aligned} U_0 &= \frac{10^3}{2(200)} (60^2 + 50^2 + 40^2) - \frac{0.3(10^3)}{200} (3000 + 2400 + 2000) \\ &= 8.15 \text{ kPa} \end{aligned}$$

Thus,

$$\begin{aligned} U &= U_0(abc) \\ &= 8.15(10^3)(0.25 \times 0.2 \times 0.15) \\ &= 61.125 \text{ N} \cdot \text{m} \end{aligned}$$



SOLUTION (2.58)

Equation (2.59) leads to

$$\begin{aligned} U_n &= \frac{P^2(3L/4)}{2AE} + \frac{P^2(L/4)}{2(n^2 A)E} = \frac{P^2 L}{8AE} \left(3 + \frac{1}{n^2} \right) \\ &= \frac{1+3n^2}{4n^2} \frac{P^2 L}{2AE} \end{aligned}$$



We have,

$$\text{for } n = 1 : \quad U_1 = \frac{P^2 L}{2AE}$$

$$\text{Thus, for } n = \frac{1}{2} : \quad U_{1/2} = \frac{7U_1}{4}$$

$$\text{for } n = 2 : \quad U_2 = \frac{13U_1}{16}$$



Hence,

$$U_{1/2} > U_1 \quad \text{and} \quad U_2 < U_1$$



SOLUTION (2.59)

$$(a) \quad U = \frac{1}{2E} \int dx \int \sigma^2 dA = \frac{1}{2E} \int dx \int \left(\frac{P}{A} + \frac{My}{I} \right)^2 dA$$

Since $\int y dA = 0$, this becomes:

$$U = \int \frac{P^2 dx}{2AE} + \int \frac{M^2 dx}{2EI} = U_a + U_b$$



Here

$$\begin{aligned} U_b &= \frac{1}{2EI} \left[\int_0^a M_{AD}^2 dx + \int_0^b M_{DB}^2 dx \right] \\ &= \frac{1}{2EI} \left[\int_0^a \left(-\frac{M_0 x}{L} \right)^2 dx + \int_0^b \left(\frac{M_0 x'}{L} \right)^2 dx' \right] \\ &= \frac{M_0^2}{6EIL^2} (a^3 + b^3) \end{aligned}$$

$$\text{Thus, } U = \frac{P^2 L}{2AE} + \frac{M_0^2}{6EIL^2} (a^3 + b^3)$$



(b) Substituting the given data:

$$\begin{aligned} U &= \frac{(8 \times 10^3)^2 (1.2)}{2(7.5 \times 10^{-3})(70 \times 10^9)} + \frac{(2 \times 10^3)^2 (0.027 + 0.729)}{6(70 \times 10^9)(0.075 \times 0.1^3 / 12)(1.2)^2} \\ &= 0.0731 + 0.8 = 0.8731 \text{ N} \cdot \text{m} \end{aligned}$$



SOLUTION (2.60)

$$\begin{aligned} U &= \sum \frac{T^2 L}{2JG} = \frac{T^2 (L/2)}{2(\frac{\pi}{32} d_1^4)G} + \frac{T^2 (L/2)}{2(\frac{\pi}{32} d_2^4)G} \\ &= \frac{8T^2 L}{\pi G} \left(\frac{1}{d_1^4} + \frac{1}{d_2^4} \right) \end{aligned} \tag{a}$$

$$\begin{aligned} \phi &= \sum \frac{TL}{JG} = \frac{T(L/2)}{\frac{\pi}{32} d_1^4 G} + \frac{T(L/2)}{\frac{\pi}{32} d_2^4 G} \\ &= \frac{16TL}{\pi G} \left(\frac{1}{d_1^4} + \frac{1}{d_2^4} \right) \end{aligned} \tag{b}$$

Solving T from Eq. (b) and substituting into Eq. (a) result in Eq. (P2.60).

SOLUTION (2.61)

We have for segment AB , $T_{AB} = 3T$ and for segment BC , $T_{BC} = T$

$$(a) \quad U_{AB} = \left(\frac{T^2 L}{2 J G}\right)_{AB} = \frac{9 T^2 (1.2a)}{\pi (1.4d)^4 G / 16} = 44.977 \frac{T^2 a}{\pi d^4 G}$$

$$\text{and} \quad U_{BC} = \left(\frac{T^2 L}{2 J G}\right)_{BC} = \frac{16 T^2 a}{\pi d^4 G}$$

The total energy is thus

$$U = 60.981 \frac{T^2 a}{\pi d^4 G}$$


(b) Substituting the given data into the above equation,

$$U = 60.981 \frac{(1.4 \times 10^3)^2 (0.5)}{\pi (0.02)^4 (42 \times 10^9)} = 2.831 \text{ kN} \cdot \text{m}$$



SOLUTION (2.62)

$$M = \frac{p}{2} (Lx - x^2)$$

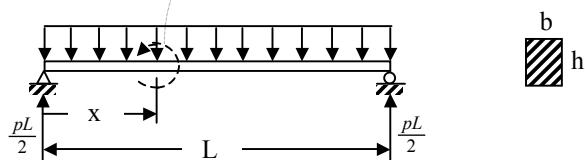

The maximum bending moment occurs at the midspan:

$$\sigma_{\max} = \frac{M_{\max} c}{I} = \frac{(pL^2/8)(h/2)}{bh^3/12} = \frac{3pL^2}{4bh^2}$$

Maximum strain energy density,

$$U_{0,\max} = \frac{\sigma_{\max}^2}{2E} = \frac{9p^2 L^4}{32Eb^2 h^4}$$

Using Eq. (2.63), we obtain

$$\begin{aligned} U &= \frac{1}{2EI} \int_0^L \left(\frac{p}{2}\right)^2 (Lx - x^2)^2 dx \\ &= \frac{p^2 L^5}{240EI} = \frac{p^2 L^5}{20Ebh^3} \end{aligned}$$

It is required to find c :


$$U_{0,\max} = \frac{cU}{V} \quad \text{or} \quad c = U_{0,\max} \frac{V}{U}$$

$$\text{Thus, } c = \frac{9p^2 L^4}{32Eb^2 h^4} \frac{bh^3}{p^2 L^5 / 20Ebh^3} = \frac{45}{8}$$

and

$$U_{0,\max} = \frac{45U}{8V}$$

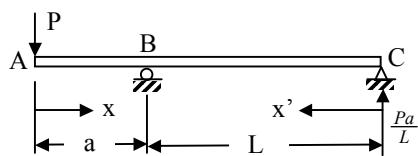

SOLUTION (2.63)


$$M_{AB} = Px$$

$$M_{BC} = \frac{Pax}{L}$$

(CONT.)

2.63 (CONT.)

We have


$$U_{AB} = \frac{1}{2EI} \int_0^a (Px) dx = \frac{P^2 a^3}{6EI}$$

$$U_{BC} = \frac{1}{2EI} \int_0^a \left(\frac{Pax}{L}\right)^2 dx' = \frac{P^2 a^2 L}{6EI}$$

Therefore

$$U = U_{AB} + U_{BC} = \frac{P^2 a^2}{6EI} (L + a)$$
◀

SOLUTION (2.64)

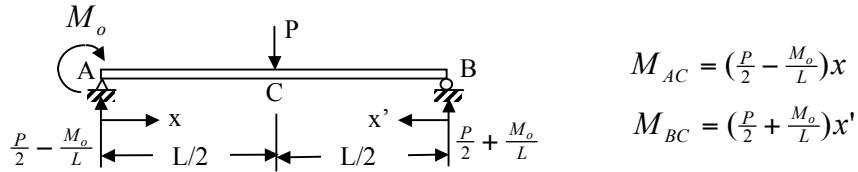

We have

$$U_{AB} = \frac{1}{2EI} \int_0^{L/2} M_{AB}^2 dx = \left(\frac{P}{2} - \frac{M_o}{L}\right)^2 \left(\frac{L^3}{48EI}\right) + M_0 \left(\frac{P}{2} - \frac{M_o}{L}\right) \left(\frac{L^2}{8EI}\right) + \frac{M_0^2 L}{4EI}$$

$$U_{BC} = \frac{1}{2EI} \int_0^{L/2} M_{BC} dx' = \left(\frac{P}{2} + \frac{M_o}{L}\right)^2 \left(\frac{L^3}{48EI}\right)$$

Thus

$$U = U_{AB} + U_{BC}$$

$$= \frac{P^2 L^3}{96EI} + \frac{PM_0 L^2}{16EI} + \frac{M_0^2 L}{6EI}$$
◀

SOLUTION (2.65)

Equation (2.66) yields

$$\tau_{oct} = \frac{1}{3} [(-19 - 4.6)^2 + (4.6 + 8.3)^2 + (-8.3 + 19)^2 + 6.45^2 + 11.8^2]^{\frac{1}{2}} = 15.11 \text{ MPa}$$

Applying Eqs. (2.65) and (2.64), respectively,

$$U_{0d} = \frac{3}{4(76.9 \times 10^9)} (15.11)^2 = 2226.71 \text{ Pa}$$
◀

and

$$U_{0v} = \frac{(-19+4.6-8.3)^2(10^{12})}{18(166.67 \times 10^9)} = 171.76 \text{ Pa}$$
◀

It follows that

$$\frac{U_{0d}}{U_{0v}} = 12.96 \approx 13$$
◀

SOLUTION (2.66)

Dilatational stress is

$$\sigma_m = \frac{(200-50+40)}{3} = 63.33 \text{ MPa}$$

Distortional stresses are then

$$\sigma_x - \sigma_m = 200 - 63.33 = 136.6 \text{ MPa}$$

$$\sigma_y - \sigma_m = -50 - 63.33 = -113.3 \text{ MPa}$$

$$\sigma_z - \sigma_m = 40 - 63.33 = -23.33 \text{ MPa}$$

Dilatational and deviator stress matrices are, respectively,

$$\begin{bmatrix} 63.33 & 0 & 0 \\ 0 & 63.33 & 0 \\ 0 & 0 & 63.33 \end{bmatrix} \text{ MPa}$$

and

$$\begin{bmatrix} 136.6 & 20 & 10 \\ 20 & -113.3 & 0 \\ 10 & 0 & -23.33 \end{bmatrix} \text{ MPa}$$

Next, substitute the above deviator stresses into Eq. (1.33). Then, solve the resulting equation for principal deviator stresses, using Table B.1:

$$\sigma_{1d} = 138.8 \text{ MPa} \quad \sigma_{2d} = -23.9 \text{ MPa} \quad \sigma_{3d} = -114.9 \text{ MPa}$$

SOLUTION (2.67)

Only existing stresses are: $\sigma_x = \sigma$ $\tau_{xy} = \tau$

Here,

$$\tau = \frac{2T}{\pi r^3} = \frac{2(20 \times 10^3)}{\pi (0.06)^3} = 58.95 \text{ MPa}$$

$$\sigma = \frac{4M}{\pi r^3} = \frac{4(15 \times 10^3)}{\pi (0.06)^3} = 88.42 \text{ MPa}$$

We have

$$G = \frac{2E}{5} \quad K = \frac{2E}{3}$$

Equations (2.64) and (2.65):

$$\begin{aligned} U_{0v} &= \frac{\sigma^2}{18K} = \frac{\sigma^2}{12E} = \frac{(88.42)^2 (10^3)}{12(200)} \\ &= 3.258 \text{ kPa} \end{aligned}$$

$$\begin{aligned} U_{0d} &= \frac{5}{12E} (\sigma^2 + 3\tau^2) = \frac{5(10^3)}{12(200)} (7818.1 + 10,425.3) \\ &= 38.007 \text{ kPa} \end{aligned}$$

Thus,

$$U_0 = U_{0v} + U_{0d} = 41.265 \text{ kPa}$$

SOLUTION (2.68)

Principal stresses are

$$\sigma_{1,2} = \frac{\sigma}{2} \pm \left[\frac{\sigma^2}{4} + \tau^2 \right]^{\frac{1}{2}}, \quad \sigma_3 = 0$$

and

$$\tau_{oct} = \frac{1}{3}(2\sigma^2 + 6\tau^2)^{\frac{1}{2}}$$

Equations (2.64) and (2.65) are therefore

$$U_{0v} = \frac{1}{18K}(\sigma_1^2 + \sigma_2^2) = \frac{\sigma^2}{18K} = \frac{1-2\nu}{6E}\sigma^2$$

$$U_{0d} = \frac{3}{4G}\tau_{oct}^2 = \frac{1+\nu}{3E}(\sigma^2 + 3\tau^2)$$



SOLUTION (2.69)

Only existing stress components are: $\sigma_x = \sigma$ $\tau_{xy} = \tau$

where,

$$\sigma = \frac{P}{\pi r^2} \quad \tau = \frac{2T}{\pi r^3}$$

The area properties are: $A = \pi r^2$ $J = \frac{\pi r^4}{2}$

Thus, Eqs. (2.64) and (2.65) become

$$U_{0v} = \frac{\sigma^2}{18K} = \frac{1-2\nu}{6E}\sigma^2 = \frac{\sigma^2}{12E}$$

$$U_{0d} = \frac{3}{4G}\tau_{oct}^2 = \frac{5\sigma^2}{12E} + \frac{5\tau^2}{4E}$$

The components of strain energy are

$$U_v = \int U_{0v} dV = \frac{1}{12E} \int \frac{P^2}{A} dx = \frac{P^2 L}{12\pi r^2 E}$$

$$U_d = \int U_{0d} dV = \frac{5}{12E} \int \frac{P^2}{E} dx + \frac{5}{4E} \int \frac{T^2}{J} dx \\ = \frac{5P^2 L}{12\pi r^2 E} + \frac{5T^2 L}{2\pi r^4 E}$$



Total strain energy is therefore

$$U = \frac{L}{2\pi r^2 E} \left(P^2 + 5 \frac{T^2}{r^2} \right)$$



CHAPTER 3

SOLUTION (3.1)

(a) We obtain

$$\frac{\partial^4 \Phi}{\partial x^4} = -12 pxy \quad \frac{\partial^4 \Phi}{\partial y^4} = 0 \quad \frac{\partial^4 \Phi}{\partial x^2 \partial y^2} = 6 pxy$$

$$\text{Thus, } \nabla^4 \Phi = -12 pxy + 2(6 pxy) = 0$$

and the given stress field represents a possible solution. ◀

(b) $\frac{\partial^2 \Phi}{\partial x^2} = pxy^3 - 2px^3y$

Integrating twice

$$\Phi = \frac{px^3y^3}{6} - \frac{px^5y}{10} + f_1(y)x + f_2(y)$$

The above is substituted into $\nabla^4 \Phi = 0$ to obtain

$$\frac{d^4 f_1(y)}{dy^4} x + \frac{d^4 f_2(y)}{dy^4} = 0$$

This is possible only if

$$\frac{d^4 f_1(y)}{dy^4} = 0 \quad \frac{d^4 f_2(y)}{dy^4} = 0$$

We find then

$$f_1 = c_4y^3 + c_5y^2 + c_6y + c_7$$

$$f_2 = c_8y^3 + c_9y^2 + c_{10}y + c_{11}$$

Therefore,

$$\Phi = \frac{px^3y^3}{6} - \frac{px^5y}{10} + (c_4y^3 + c_5y^2 + c_6y + c_7)x + c_8y^3 + c_9y^2 + c_{10}y + c_{11} \quad \blacktriangleleft$$

(c) Edge y=0:

$$V_x = \int_{-a}^a \tau_{xy} t dx = \int_{-a}^a (\frac{px^4}{2} + c_3) t dx = \frac{pa^5 t}{5} + 2c_3 a t \quad \blacktriangleleft$$

$$P_y = \int_{-a}^a \sigma_y t dx = \int_{-a}^a (0) t dx = 0 \quad \blacktriangleleft$$

Edge y=b:

$$\begin{aligned} V_x &= \int_{-a}^a (-\frac{3}{2}px^2b^2 + c_1b^2 + \frac{px^4}{2} + c_3) t dx \\ &= -pa^3(b^2 - \frac{a^2}{5})t + 2a(c_1b^2 + c_3)t \end{aligned} \quad \blacktriangleleft$$

$$P_y = \int_{-a}^a (pxb^3 - 2px^3b) t dx = 0 \quad \blacktriangleleft$$

SOLUTION (3.2)

Edge $x = \pm a$:

$$\tau_{xy} = 0 : \quad -\frac{3}{2}pa^2y^2 + c_1y^2 + \frac{1}{2}pa^4 + c_3 = 0$$

$$\tau_{xy} = 0 : \quad -\frac{3}{2}pa^2y^2 + c_1y^2 + \frac{1}{2}pa^4 + c_3 = 0$$

$$\text{Adding, } (-3pa^2 + 2c_1)y^2 + pa^4 + 2c_3 = 0$$

(CONT.)

3.2 (CONT.)

or $c_1 = \frac{3}{2}pa^2$ $c_3 = -\frac{1}{2}pa^4$

Edge $x = a$:

$$\sigma_x = 0 : \quad pa^3y - 2c_1ay + c_2y = 0$$

or

$$c_2 = 2pa^3$$

SOLUTION (3.3)

(a) Equations (3.6) become

$$\frac{\partial \sigma_x}{\partial x} + \frac{\partial \tau_{xy}}{\partial y} = 0 \quad \frac{\partial \tau_{xy}}{\partial x} = 0$$

Substituting the given stresses, we have


$$c_2y - 2c_3y = 0$$

Thus

$$c_2 = 2c_3 \quad c_1 = \text{arbitrary}$$

(b) $\sigma_x = c_1y + c_2xy \quad \tau_{xy} = \frac{c_2}{2}(b^2 - y^2)$

Assume $c_1 > 0$ and $c_2 > 0$.

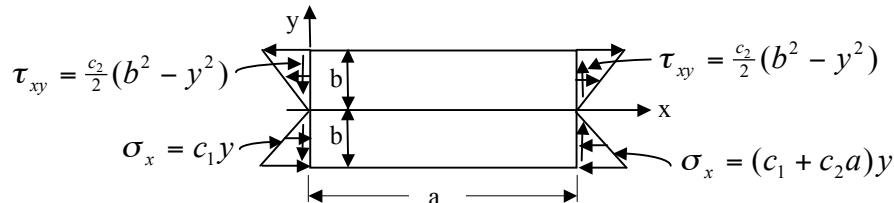

SOLUTION (3.4)

Boundary conditions, Eq. (3.6):

$$\frac{\partial \sigma_x}{\partial x} + \frac{\partial \tau_{xy}}{\partial y} = 0 \quad \frac{\partial \tau_{xy}}{\partial x} + \frac{\partial \sigma_y}{\partial y} = 0$$

or $(2ab - 2ab)x = 0 \quad (-2ab + 2ab)y = 0$

are fulfilled.

However, equation of compatibility:

$$\left(\frac{\partial^2}{\partial x^2} + \frac{\partial^2}{\partial y^2}\right)(\sigma_x + \sigma_y) = 0 \quad \text{or} \quad 4ab \neq 0 \quad \text{is not satisfied.}$$

Thus, the stress field given does not meet requirements for solution.

SOLUTION (3.5)

It is readily shown that

$$\nabla^4 \Phi_1 = 0 \quad \text{is satisfied}$$

$$\nabla^4 \Phi_2 = 0 \quad \text{is satisfied}$$

(CONT.)

3.5 (CONT.)

We have

$$\sigma_x = \frac{\partial^2 \Phi_1}{\partial y^2} = 2c, \quad \sigma_y = \frac{\partial^2 \Phi_1}{\partial x^2} = 2a, \quad \tau_{xy} = -\frac{\partial^2 \Phi_1}{\partial x \partial y} = -b \quad \blacktriangleleft$$

Thus, stresses are uniform over the body.

Similarly, for Φ_2 :

$$\sigma_x = 2cx + 6dy \quad \sigma_y = 6ax + 2by \quad \tau_{xy} = -2bx - 2cy \quad \blacktriangleleft$$

Thus, stresses vary linearly with respect to x and y over the body.

SOLUTION (3.6)

Note: Since $\sigma_z = 0$ and $\epsilon_y = 0$, we have plane stress in xy plane and plane strain in xz plane, respectively.

Equations of compatibility and equilibrium are satisfied by

$$\begin{aligned} \sigma_x &= -\sigma_0 & \sigma_y &= -c & \sigma_z &= 0 \\ \tau_{xy} &= \tau_{yz} = \tau_{xz} = 0 \end{aligned} \quad (a)$$

We have

$$\epsilon_y = 0 \quad (b)$$

Stress-strain relations become

$$\begin{aligned} \epsilon_x &= \frac{(\sigma_x - \nu \sigma_y)}{E}, & \epsilon_y &= \frac{(\sigma_y - \nu \sigma_x)}{E} \\ \epsilon_z &= \frac{-\nu(\sigma_x + \sigma_y)}{E}, & \gamma_{xy} &= \gamma_{yz} = \gamma_{xz} = 0 \end{aligned} \quad (c)$$

Substituting Eqs. (a,b) into Eqs. (c), and solving

$$\begin{aligned} \sigma_y &= -\nu \sigma_0 & \epsilon_z &= \frac{\nu(1+\nu)\sigma_0}{E} \\ \epsilon_x &= -\frac{(1-\nu^2)}{\sigma_0 E} & \epsilon_y &= 0 \end{aligned}$$

Then, Eqs. (2.3) yield, after integrating:

$$\begin{aligned} u &= -\frac{(1-\nu^2)\sigma_0 x}{E} & \nu &= 0 \\ w &= \frac{\nu(1+\nu)\sigma_0 z}{E} \end{aligned} \quad \blacktriangleleft$$

SOLUTION (3.7)

Equations of equilibrium,

$$\begin{aligned} \frac{\partial \sigma_x}{\partial x} + \frac{\partial \tau_{xy}}{\partial y} &= 0, & 2axy + 2axy &= 0 \\ \frac{\partial \tau_{xy}}{\partial y} + \frac{\partial \sigma_y}{\partial x} &= 0, & ay^2 - ay^2 &= 0 \end{aligned}$$

are satisfied. Equation (3.12) gives

$$\left(\frac{\partial^2}{\partial x^2} + \frac{\partial^2}{\partial y^2}\right)(\sigma_x + \sigma_y) = -4ay \neq 0$$

Compatibility is violated; solution is *not* valid.

SOLUTION (3.8)

We have

$$\frac{\partial^2 \epsilon_x}{\partial y^2} = 0 \quad \frac{\partial^2 \epsilon_y}{\partial x^2} = -2ay \quad \frac{\partial^2 \gamma_{xy}}{\partial x \partial y} = 2ay$$

Equation of compatibility, Eq. (3.8) is satisfied. Stresses are

$$\sigma_x = \frac{E}{1-\nu^2} (\epsilon_x + \nu \epsilon_y) = \frac{aE}{1-\nu^2} (x^3 + \nu x^2 y)$$

$$\sigma_y = \frac{E}{1-\nu^2} (\epsilon_y + \nu \epsilon_x) = \frac{aE}{1-\nu^2} (x^2 y + \nu x^3)$$

$$\tau_{xy} = G \gamma_{xy} = \frac{aE}{2(1+\nu)} xy^2$$

Equations (3.6) become

$$\frac{aE}{1-\nu^2} (3x^2 + 2\nu xy) + \frac{aE}{1+\nu} xy = 0$$

$$\frac{aE}{1-\nu^2} y^2 + \frac{aE}{1-\nu^2} x^2 = 0$$

These cannot be true for all values of x and y. Thus, Solution is *not* valid.

SOLUTION (3.9)

$$\epsilon_x = \frac{\partial u}{\partial x} = -2\nu cx \quad \epsilon_y = \frac{\partial v}{\partial y} = 2ax$$


$$\gamma_{xy} = \frac{\partial u}{\partial y} + \frac{\partial v}{\partial x} = -2cy + 2cy = 0$$

Thus

$$\sigma_x = \frac{E}{1-\nu^2} (\epsilon_x + \nu \epsilon_y) = 0 \quad \tau_{xy} = G \gamma_{xy}$$

$$\sigma_y = \frac{E}{1-\nu^2} (\epsilon_y + \nu \epsilon_x) = 2Ec x$$

Note that this is a state of *pure bending*.




SOLUTION (3.10)

$$(a) \quad \sigma_x = \frac{\partial^2 \Phi}{\partial y^2} = 0, \quad \sigma_y = 6pxy \quad \tau_{xy} = -3px^2$$

Note that $\nabla^4 \Phi = 0$ is satisfied.

(b)

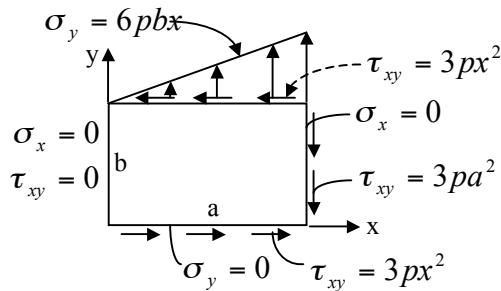

$$(c) \quad \text{Edge } x = 0 : \quad V_y = P_x = 0$$

$$\text{Edge } x = a : \quad P_x = 0$$

(CONT.)

3.10 (CONT.)

$$V_y = \int_0^b \tau_{xy} t dy = 3pa^2bt \downarrow$$

Edge $y = 0$: $P_y = 0$

$$V_x = \int_0^a \tau_{xy} t dx = pa^3t \rightarrow$$

Edge $y = b$: $V_x = pa^3t \leftarrow$


$$P_y = \int_0^a \sigma_y t dx = 3pa^2bt \uparrow$$

SOLUTION (3.11)

(a) We have $\nabla^4\Phi \neq 0$ is not satisfied.

$$\sigma_y = \frac{\partial^2 \Phi}{\partial x^2} = \frac{py^2}{a^2}, \quad \sigma_x = \frac{p(x^2+xy)}{a^2}, \quad \tau_{xy} = -\frac{p(4xy+y^2)}{2a^2}$$

(b)

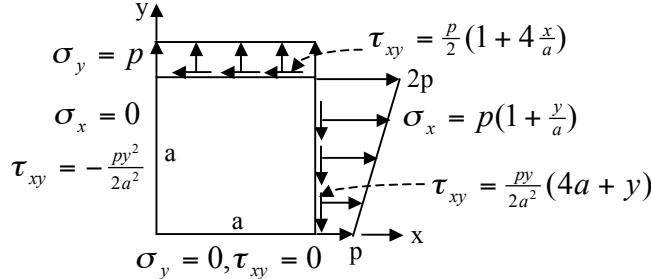

(c) Edge $x = 0$: $V_y = \int_0^a \frac{py^2}{2a^2} dy = \frac{1}{6} pat \quad P_x = 0$

Edge $x = a$:

$$V_y = \int_0^a \tau_{xy} t dy = \frac{7}{6} pat \downarrow$$

$$P_x = \int_0^a \sigma_x t dy = \frac{3}{2} pat \rightarrow$$

Edge $y = 0$: $V_x = 0 \quad P_y = 0$

Edge $y = a$:

$$V_x = \int_0^a \tau_{xy} t dx = \frac{3}{2} pat \leftarrow$$

$$P_y = \int_0^a \sigma_y p t dx = pat \uparrow$$

SOLUTION (3.12)

(a) We have $\nabla^4\Phi = 0$ is satisfied. The stresses are


$$\sigma_x = \frac{\partial^2 \Phi}{\partial y^2} = -\frac{px}{b^3}(6b - 12y) \quad \sigma_y = \frac{\partial^2 \Phi}{\partial x^2} = 0$$

$$\tau_{xy} = -\frac{\partial^2 \Phi}{\partial x \partial y} = \frac{6py}{b^3}(b - y)$$

(CONT.)

 3.12 (CONT.)

(b)

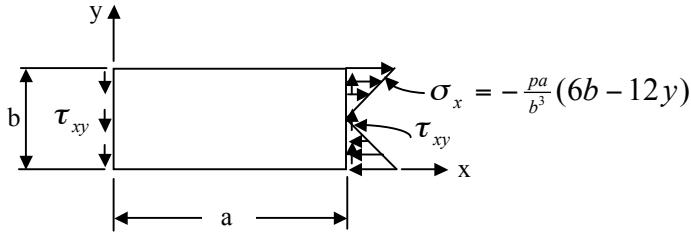

 SOLUTION (3.13)

We have

$$\frac{\partial \Phi}{\partial y} = -\frac{P}{\pi} \left[\tan^{-1} \frac{y}{x} + \frac{xy}{x^2+y^2} \right], \quad \frac{\partial \Phi}{\partial x} = -\frac{Py}{\pi} \frac{-y}{x^2+y^2}$$


$$\frac{\partial^2 \Phi}{\partial y^2} = -\frac{P}{\pi} \left[\frac{x}{x^2+y^2} + \frac{(x^2+y^2)x-2y^2x}{(x^2+y^2)^2} \right]$$

The stresses are thus,

$$\sigma_x = \frac{\partial^2 \Phi}{\partial y^2} = -\frac{2P}{\pi} \frac{x^3}{(x^2+y^2)^2}$$

$$\sigma_y = \frac{\partial^2 \Phi}{\partial x^2} = -\frac{2P}{\pi} \frac{xy^2}{(x^2+y^2)^2}$$

$$\tau_{xy} = -\frac{\partial^2 \Phi}{\partial x \partial y} = -\frac{2P}{\pi} \frac{x^2y}{(x^2+y^2)^2}$$

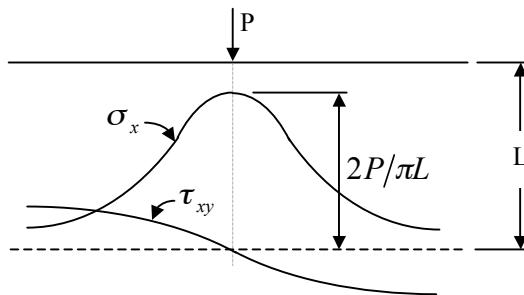

 SOLUTION (3.14)

 Various derivatives of Φ are:

$$\begin{aligned} \frac{\partial \Phi}{\partial x} &= \frac{\tau_0}{4} \left(y - \frac{y^2}{h} - \frac{y^3}{h^2} \right), & \frac{\partial^2 \Phi}{\partial x^2} &= 0 \\ \frac{\partial^2 \Phi}{\partial x^2 \partial y^2} &= 0, & \frac{\partial^2 \Phi}{\partial x \partial y} &= \frac{\tau_0}{4} \left(1 - \frac{2y}{h} - \frac{3y^2}{h^2} \right) \\ \frac{\partial^2 \Phi}{\partial y^2} &= \frac{\tau_0}{4h} \left(-2x - \frac{6xy}{h} + 2L + \frac{6Ly}{h^2} \right) \\ \frac{\partial^4 \Phi}{\partial x^4} &= 0, & \frac{\partial^4 \Phi}{\partial y^4} &= 0 \end{aligned} \tag{a}$$

It is clear that Eqs. (a) satisfy Eq. (3.17). On the basis of Eq. (a) and (3.16), we obtain

(CONT.)

3.14 (CONT.)

$$\begin{aligned}\sigma_x &= \frac{\tau_0}{4h} \left(-2x - \frac{6xy}{h} + 2L + \frac{6Ly}{h} \right), & \sigma_y &= 0 \\ \tau_{xy} &= -\frac{\tau_0}{4} \left(1 - \frac{2y}{h} - \frac{3y^2}{h^2} \right)\end{aligned}\tag{b}$$

From Eqs. (b), we determine

$$\text{Edge } y = h : \quad \sigma_y = 0 \quad \tau_{xy} = \tau_0$$

$$\text{Edge } y = -h : \quad \sigma_y = 0 \quad \tau_{xy} = 0$$

$$\text{Edge } x = L : \quad \sigma_x = 0, \quad \tau_{xy} = -\frac{\tau_0}{4} \left(1 - \frac{2y}{h} - \frac{3y^2}{h^2} \right)$$

It is observed from the above that boundary conditions are satisfied at $y = \pm h$, but *not* at $x = L$. ◀

SOLUTION (3.15)

(a) For $\nabla^4 \Phi = 0$, $e = -5d$ and a, b, c are arbitrary.

$$\text{Thus } \Phi = ax^2 + bx^2y + cy^3 + d(y^5 - 5x^2y^3) \tag{1} \quad \blacktriangleleft$$

(b) The stresses:

$$\sigma_x = \frac{\partial^2 \Phi}{\partial y^2} = 6cy + 10d(2y^3 - 3x^2y) \tag{2}$$

$$\sigma_y = \frac{\partial^2 \Phi}{\partial x^2} = 2a + 2by - 10dy^3 \tag{3}$$

$$\tau_{xy} = -\frac{\partial^2 \Phi}{\partial x \partial y} = -2bx - 30dxy^2 \tag{4}$$

Boundary conditions:

$$\sigma_y = -p \quad \tau_{xy} = 0 \quad (\text{at } y=h) \tag{5}$$

Equations (3), (4), and (5) give

$$b = -15dh^2 \quad 2a - 40dh^3 = -p \tag{6}$$

$$\int_{-h}^h \sigma_x dy = 0 \quad \int_{-h}^h y \sigma_x dy = 0 \quad \int_{-h}^h \tau_{xy} dy = 0 \quad (\text{at } x=0) \tag{7}$$

Equations (2), (4), and (7) yield

$$c = -2dh^2 \tag{8}$$

Similarly

$$\sigma_y = 0 \quad \tau_{xy} = 0 \quad (\text{at } y=-h)$$

$$\text{give } a = 20dh^3 \tag{9}$$

Solution of Eqs. (6), (8), and (9) results in

$$a = -\frac{p}{4} \quad b = -\frac{3p}{16h} \quad c = -\frac{p}{40h} \quad d = \frac{p}{80h^3} \quad e = -\frac{p}{16h^3} \tag{10}$$

The stresses are therefore

$$\sigma_x = -\frac{3py}{20h} + \frac{p}{8h^3}(2y^3 - 3x^2y)$$

$$\sigma_y = -\frac{p}{2} - \frac{3py}{8h} - \frac{py^3}{8h^3}$$

$$\tau_{xy} = \frac{3px}{8h}(1 - \frac{y^2}{h^2})$$




SOLUTION (3.16)

We obtain

$$\begin{aligned}\sigma_x &= \frac{\partial^2 \Phi}{\partial y^2} = \frac{p(x^2 - 2y^2)}{a^2} \\ \sigma_y &= \frac{\partial^2 \Phi}{\partial x^2} = \frac{py^2}{a^2} \\ \tau_{xy} &= -\frac{\partial^2 \Phi}{\partial x \partial y} = -\frac{2pxy}{a^2}\end{aligned}\tag{a} \quad \blacktriangleleft$$

Taking higher derivatives of Φ , it is seen that Eq. (3.17) is *not* satisfied.

Stress field along the edges of the plate, as determined from Eqs. (a), is sketched below.

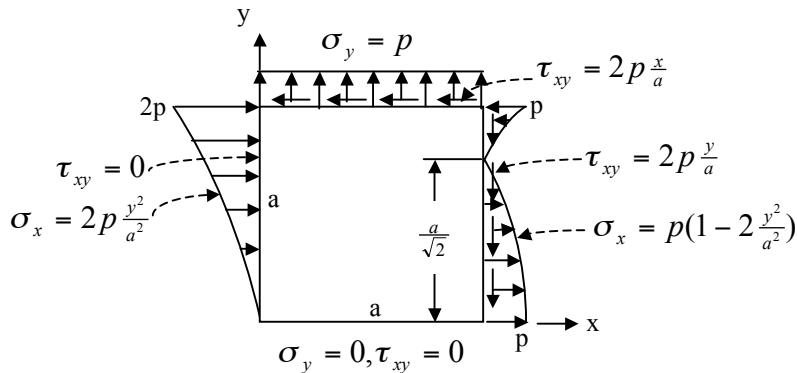

SOLUTION (3.17)

The first of Eqs. (3.6) with $F_x = 0$

$$\frac{\partial \tau_{xy}}{\partial y} = \frac{pxy}{I}$$

Integrating,

$$\tau_{xy} = \frac{pxy^2}{2I} + f_1(x) \tag{a}$$

The boundary condition,

$$(\tau_{xy})_{y=h} = 0 = \frac{pxh^2}{2I} + f_1(x)$$

gives $f_1(x) = -pxh^2/2I$. Equation (a) becomes

$$\tau_{xy} = -\frac{px}{2I}(h^2 - y^2) \tag{b} \quad \blacktriangleleft$$

Clearly, $(\tau_{xy})_{y=-h} = 0$ is satisfied by Eq. (b).

Then, the second of Eqs. (3.6) with $F_y = 0$ results in

$$\frac{\partial \sigma_y}{\partial y} = \frac{p(h^2 - y^2)}{2I}$$

Integrating,

$$\sigma_y = \frac{p}{2I} y(h^2 - \frac{y^2}{3}) + f_2(x) \tag{c}$$

Boundary condition, with $t = 3I/2h^2$,

(CONT.)

3.17 (CONT.)

$$(\sigma_y)_{y=-h} = -\frac{p}{I} = -\frac{ph}{2I}(h^2 - \frac{h^3}{3}) + f_2(x)$$

gives $f_2(x) = -ph^3/3I$. Equation (c) is thus

$$\sigma_y = \frac{p}{6I}(3h^2y - y^3 - 2h^3) \quad (d) \blacktriangleleft$$

This satisfies the condition that $(\sigma_y)_{y=h} = 0$.

Note that Eq. (3.12) is not satisfied: the solution obtained does *not* provide a compatible displacement field.

SOLUTION (3.18)

Substituting the stresses from Eqs. (3.10) into Eqs. (3.6) and taking $F_x = F_y = 0$:

$$\frac{E}{1-\nu^2} \left(\frac{\partial \varepsilon_x}{\partial x} + \nu \frac{\partial \varepsilon_y}{\partial x} \right) + G \frac{\partial \gamma_{xy}}{\partial y} = 0$$

$$\frac{E}{1-\nu^2} \left(\frac{\partial \varepsilon_y}{\partial y} + \nu \frac{\partial \varepsilon_x}{\partial y} \right) + G \frac{\partial \gamma_{xy}}{\partial x} = 0$$

or

$$\frac{E}{2(1+\nu)} \left[\frac{2}{1-\nu} \frac{\partial^2 v}{\partial x^2} + \frac{2\nu}{1-\nu} \frac{\partial^2 v}{\partial x \partial y} + \frac{\partial^2 u}{\partial y^2} + \frac{\partial^2 v}{\partial x \partial y} \right] = 0$$

$$\frac{E}{2(1+\nu)} \left[\frac{2}{1-\nu} \frac{\partial^2 v}{\partial y^2} + \frac{2\nu}{1-\nu} \frac{\partial^2 u}{\partial x \partial y} - \frac{\partial^2 u}{\partial x \partial y} + \frac{\partial^2 v}{\partial x^2} \right] = 0$$

The foregoing become

$$\frac{\partial^2 u}{\partial x^2} + \frac{1+\nu}{1-\nu} \frac{\partial^2 u}{\partial x^2} - \frac{1+\nu}{1-\nu} \frac{\partial^2 v}{\partial x \partial y} + \frac{\partial^2 u}{\partial y^2} = 0$$

$$\frac{\partial^2 v}{\partial y^2} + \frac{1+\nu}{1-\nu} \frac{\partial^2 v}{\partial y^2} + \frac{1+\nu}{1-\nu} \frac{\partial^2 v}{\partial x \partial y} + \frac{\partial^2 u}{\partial y^2} = 0$$

or

$$\frac{\partial^2 u}{\partial x^2} + \frac{\partial^2 u}{\partial y^2} + \frac{1+\nu}{1-\nu} \frac{\partial}{\partial x} \left(\frac{\partial u}{\partial x} + \frac{\partial v}{\partial y} \right) = 0$$

$$\frac{\partial^2 v}{\partial y^2} + \frac{\partial^2 v}{\partial x^2} + \frac{1+\nu}{1-\nu} \frac{\partial}{\partial y} \left(\frac{\partial v}{\partial y} + \frac{\partial u}{\partial x} \right) = 0$$

SOLUTION (3.19)

It is readily found that

$$\frac{\partial \sigma_x}{\partial x} = -\frac{pxy}{I} \quad \frac{\partial \tau_{xy}}{\partial y} = \frac{pxy}{I}$$

$$\text{And} \quad \frac{\partial \sigma_y}{\partial y} = -\frac{p}{I}(-h^2 + y^2) \quad \frac{\partial \tau_{xy}}{\partial x} = -\frac{p}{2I}(h^2 - y^2)$$

Thus, Eqs. (3.6) are satisfied: stress field is possible.

We have $x_Q = 1.5 m$, $y_Q = 0.05 m$, and

$$I = \frac{2th^3}{3} = \frac{2(0.04)(0.1)^3}{3} = 2.67(10^{-5}) m^4$$

Substituting the given data, Eqs. (P3.19) yield at Q:

$$\begin{aligned} \sigma_x &= \frac{-10 \times 10^3}{10(2.67 \times 10^{-5})} (5 \times 10^5 + 2 \times 0.1^2) 0.05 + \frac{-10 \times 10^3}{3(2.67 \times 10^{-5})} (1.25 \times 10^{-4}) \\ &= -21.09 MPa \end{aligned}$$

(CONT.)

3.19 (CONT.)

$$\tau_{xy} = \frac{-10 \times 10^3}{2(2.67 \times 10^{-5})} (0.1^2 - 0.05^2) = -2.106 \text{ MPa}$$

$$\sigma_y = \frac{-10 \times 10^3}{6(2.67 \times 10^{-5})} (2 \times 0.1^3 - 3 \times 0.0005 + 0.05^3) = -0.039 \text{ MPa}$$

Applying Eq. (2.29), we have

$$G = \frac{200(10^9)}{2(1+0.3)} = 76.9 \text{ MPa}$$

Hooke's law is therefore

$$\varepsilon_x = \frac{1}{200(10^9)} (-21.09 + 0.3 \times 0.039) 10^6 = -105 \mu$$

$$\varepsilon_y = \frac{1}{200(10^9)} (-0.039 + 0.3 \times 21.09) 10^6 = 31.4 \mu$$

$$\gamma_{xy} = \frac{-2.106(10^6)}{76.9(10^9)} = -27.4 \mu$$

Principal strains are

$$\varepsilon_{1,2} = \frac{-105+31.4}{2} \pm \left[\left(\frac{136.4}{2} \right)^2 + \left(\frac{-27.4}{2} \right)^2 \right]^{\frac{1}{2}}$$

or $\varepsilon_1 = 32.8 \mu$ $\varepsilon_2 = -106 \mu$

We have $\theta_p = \frac{1}{2} \tan^{-1} \frac{-27.4}{-105-31.4} = 5.65^\circ$

For this angle, Eq. (2.14a) yield $\varepsilon_{x'} = 32.8 \mu$. Thus,

$$\theta_p' = 5.65^\circ$$

SOLUTION (3.20)

Assume $\varepsilon_x = \varepsilon_y = 0$, $\sigma_z = 0$, $\sigma_x = \sigma_y = \text{constant}$

which satisfy Eqs. (3.6) and (3.27). Hooke's law becomes

$$\varepsilon_x = \frac{1}{E} (\sigma_x - \nu \sigma_y) + \alpha T_1 = 0 \quad (a)$$

$$\varepsilon_y = \frac{1}{E} (\sigma_y - \nu \sigma_x) + \alpha T_1 = 0 \quad (b)$$

$$\varepsilon_z = \frac{\nu}{E} (-\sigma_x - \sigma_y) + \alpha T_1 = 0 \quad (c)$$

From Eqs. (a) and (b), we obtain $\sigma_x = \sigma_y$. Therefore,

$$\varepsilon_x = \frac{\sigma_x}{E} (1 - \nu) + \alpha T_1 = 0$$

This yields

$$\sigma_x = \sigma_y = \frac{E \alpha T_1}{\nu - 1}$$

Then, Eq. (c) becomes

$$\varepsilon_z = \frac{2\nu\alpha T_1}{1-\nu} + \alpha T_1$$

We also have: $\tau_{xy} = \tau_{yz} = \tau_{xz} = 0$ and $\gamma_{xy} = \gamma_{yz} = \gamma_{xz} = 0$.

SOLUTION (3.21)

The nonzero strain components are

$$\varepsilon_x = \varepsilon_y = \varepsilon_z = \alpha T$$

(CONT.)

3.21 (CONT.)

Compatibility equations reduce to

$$\begin{aligned}\frac{\partial^2 \varepsilon_x}{\partial y^2} + \frac{\partial^2 \varepsilon_y}{\partial x^2} &= \frac{\partial^2 \gamma_{xy}}{\partial y \partial x} \\ \frac{\partial^2 \varepsilon_y}{\partial z^2} + \frac{\partial^2 \varepsilon_z}{\partial y^2} &= \frac{\partial^2 \gamma_{yz}}{\partial y \partial z} \\ \frac{\partial^2 \varepsilon_z}{\partial x^2} + \frac{\partial^2 \varepsilon_x}{\partial z^2} &= \frac{\partial^2 \gamma_{xz}}{\partial x \partial z}\end{aligned}$$

Adding the above equations and substituting the given data:

$$2\alpha\left(\frac{\partial^2 T}{\partial x^2} + \frac{\partial^2 T}{\partial y^2} + \frac{\partial^2 T}{\partial z^2}\right) = 0$$

or

$$\frac{\partial^2 T}{\partial x^2} + \frac{\partial^2 T}{\partial y^2} + \frac{\partial^2 T}{\partial z^2} = 0$$

This equation, for a time independent temperature field, has the solution

$$T = c_1' x + c_2' y + c_3' z + c_4'$$

which may be written as

$$\alpha T = c_1 x + c_2 y + c_3 z + c_4$$



SOLUTION (3.22)

Stress is $\sigma_x = -\sigma_0$ regardless of T_1 and still we have $\varepsilon_y = 0$. The second of Eqs. (3.26a) is thus

$$\varepsilon_y = \frac{1}{E}(\sigma_y + \nu\sigma_0) + \alpha T_1 = 0$$

$$\text{or } \sigma_y = -\nu\sigma_0 - E\alpha T_1 \quad (\text{a})$$

The first of Eqs. (3.26a) and (a) result in

$$\varepsilon_x = -\frac{1-\nu^2}{E}\sigma_0^2 + (1+\nu)\alpha T_1 \quad (\text{b})$$

Now, Hooke's law

$$\varepsilon_z = -\frac{\nu}{E}(\sigma_x - \sigma_y) + \alpha T_1$$

leads to

$$\varepsilon_z = \frac{\nu(1+\nu)}{E}\sigma_0 + (1+\nu)\alpha T_1 \quad (\text{c})$$


Then Equations (2.4) yield, after integration,

$$u = \varepsilon_x x \quad v = 0 \quad w = \varepsilon_z z$$



Here, ε_x and ε_z are given by Eqs. (b) and (c).

SOLUTION (3.23)



Equation (3.27) reduces to

$$\frac{d^2}{dy^2}(\sigma_x + \alpha ET) = 0$$

(CONT.)

3.23 (CONT.)

from which

$$\begin{aligned}\sigma_x &= -\alpha ET + c_1y + c_2 \\ &= -\alpha ET(a_1y + a_2) + c_1y + c_2\end{aligned}$$

Referring to Part (b) of Example 3.2: $c_1 = c_2 = 0$ and

$$\sigma_x = -\alpha E(a_1y + a_2)$$

We have

$$\begin{aligned}P_x &= \int_{-h}^h \sigma_x t dy = -2E\alpha hta_2 \\ M_z &= \int_{-h}^h \sigma_x t y dy = -E\alpha t \left[\frac{a_1 y^3}{3} + \frac{a_2 y^2}{2} \right]_{-h}^h \\ &= -\frac{2}{3} E\alpha t h^3 a_1\end{aligned}$$

The P_x and M_z are opposite to that shown above.

SOLUTION (3.24)

Assume a stress distribution:

$$\tau_{xy} = \tau_{yz} = \tau_{xz} = \sigma_y = \sigma_z = 0 \quad \sigma_x = \text{constant} \quad (\text{a})$$

which satisfy Eqs. (3.6) and (3.27). Then, Hooke's law becomes

$$\varepsilon_x = \frac{\sigma_x}{E} + \alpha T, \quad \varepsilon_y = \varepsilon_z = -\frac{\nu \sigma_x}{E} + \alpha T \quad (\text{b,c})$$

$$\gamma_{xy} = \gamma_{yz} = \gamma_{xz} = 0 \quad (\text{d})$$

Due to constraint imposed by the walls and because of the uniformity of the temperature distribution: we take $\varepsilon_x = 0$. Equations (a) and (b) give

$$\sigma_x = -\alpha ET$$

Equation (c) is then

$$\varepsilon_y = \varepsilon_z = \alpha T(1 + \nu) = \text{constant}$$

The compressive force P on the tube is

$$P_x = \sigma_x A = -E\alpha At$$

Substituting the data given

$$\begin{aligned}P_x &= -120(10^9)(16.8 \times 10^{-6}) \times (800 \times 10^{-6})(100) \\ &= -161.3 \text{ kN}\end{aligned}$$

SOLUTION (3.25)

Derivatives of the given stress function are

$$\frac{\partial^2 \Phi}{\partial r^2} = 0, \quad \frac{1}{r} \frac{\partial \Phi}{\partial r} = -\frac{P\theta}{\pi r} \sin \theta, \quad \frac{1}{r^2} \frac{\partial^2 \Phi}{\partial \theta^2} = \frac{P\theta}{\pi r} \sin \theta - \frac{2P}{\pi r} \cos \theta$$

Equation (3.40) becomes

$$\nabla^4 \Phi = \left(\frac{\partial^2}{\partial r^2} + \frac{1}{r} \frac{\partial}{\partial r} + \frac{1}{r^2} \frac{\partial^2}{\partial \theta^2} \right) \left(-\frac{2P}{\pi r} \cos \theta \right)$$

(CONT.)

3.25 (CONT.)

After performing the derivatives, we obtain $\nabla^4 \Phi = 0$.

Substituting the derivatives obtained above, into Eqs. (3.32):

$$\begin{aligned}\sigma_r &= -\frac{P\theta}{\pi r} \sin \theta + \frac{P\theta}{\pi r} \sin \theta - \frac{2P}{\pi r} \cos \theta \\ &= -\frac{2P}{\pi r} \cos \theta\end{aligned}$$



Similarly, we find $\sigma_\theta = 0$ and $\tau_{r\theta} = 0$.

SOLUTION (3.26)

Refer to Fig. P3.26a. Let $A_{BC} = 1$ and hence $A_{AB} = \cos \theta$, $A_{AC} = \sin \theta$.

$$\sum F_x = 0:$$

$$\sigma_x = \sigma_r \cos \theta \cos \theta + \sigma_\theta \sin \theta \sin \theta - 2\tau_{r\theta} \sin \theta \cos \theta$$

$$\sum F_y = 0:$$

$$\tau_{xy} = \sigma_r \cos \theta \sin \theta - \sigma_\theta \sin \theta \cos \theta + \tau_{r\theta} \cos \theta \cos \theta$$

$$-\tau_{r\theta} \sin \theta \sin \theta$$

Similarly, from Fig. P3.26b:

$$\sum F_y = 0:$$

$$\sigma_y = \sigma_r \sin^2 \theta + \sigma_\theta \cos^2 \theta + 2\tau_{r\theta} \sin \theta \cos \theta$$

$$\text{Check: } \sum F_x = 0:$$

$$\tau_{xy} = \sigma_r \sin \theta \cos \theta - \sigma_\theta \sin \theta \cos \theta + \tau_{r\theta} (\cos^2 \theta - \sin^2 \theta)$$

Thus, quoted equations are derived.

SOLUTION (3.27)

Apply the chain rule (Sec. 3.9):

$$\frac{\partial \Phi}{\partial x} = \frac{\partial \Phi}{\partial r} \cos \theta - \frac{1}{r} \frac{\partial \Phi}{\partial \theta} \sin \theta$$

$$\text{and } \frac{\partial^2 \Phi}{\partial x^2} = \frac{\partial^2 \Phi}{\partial r^2} \cos^2 \theta - 2 \frac{\partial^2 \Phi}{\partial \theta \partial r} \frac{\sin \theta \cos \theta}{r} + \frac{\partial \Phi}{\partial r} \frac{\sin^2 \theta}{r} - 2 \frac{\partial \Phi}{\partial r} \frac{\sin \theta \cos \theta}{r^2} + \frac{\partial^2 \Phi}{\partial \theta^2} \frac{\sin^2 \theta}{r^2} \quad (\text{a})$$

Similarly,

$$\frac{\partial^2 \Phi}{\partial y^2} = \frac{\partial^2 \Phi}{\partial r^2} \sin^2 \theta + 2 \frac{\partial^2 \Phi}{\partial \theta \partial r} \frac{\sin \theta \cos \theta}{r} + \frac{\partial \Phi}{\partial r} \frac{\cos^2 \theta}{r} + 2 \frac{\partial \Phi}{\partial \theta} \frac{\sin \theta \cos \theta}{r^2} + \frac{\partial^2 \Phi}{\partial \theta^2} \frac{\cos^2 \theta}{r^2} \quad (\text{b})$$

Adding Eqs. (a) and (b), we have

$$\frac{\partial^2 \Phi}{\partial x^2} + \frac{\partial^2 \Phi}{\partial y^2} = \frac{\partial^2 \Phi}{\partial r^2} + \frac{1}{r} \frac{\partial \Phi}{\partial r} + \frac{1}{r^2} \frac{\partial^2 \Phi}{\partial \theta^2} \quad (\text{c})$$

By referring to the identity

$$\frac{\partial^4 \Phi}{\partial x^4} + 2 \frac{\partial^4 \Phi}{\partial x^2 \partial y^2} + \frac{\partial^4 \Phi}{\partial y^4} = \left(\frac{\partial^2}{\partial x^2} + \frac{\partial^2}{\partial y^2} \right) \left(\frac{\partial^2 \Phi}{\partial x^2} + \frac{\partial^2 \Phi}{\partial y^2} \right)$$

and Eq. (c), we can readily write the equation quoted, Eq. (3.40).

SOLUTION (3.28)

Equation (3.28) is written as

$$\left(\frac{d^2}{dr^2} + \frac{1}{r} \frac{d}{dr} \right) \left(\frac{d^2 \Phi}{dr^2} + \frac{1}{r} \frac{d\Phi}{dr} \right) + \alpha ET \left(\frac{d^2}{dr^2} + \frac{1}{r} \frac{d}{dr} \right) = 0$$

(CONT.)

3.28 (CONT.)

$$\text{or} \quad \frac{d^2\Phi}{dr^2} + \frac{1}{r} \frac{d\Phi}{dr} + \alpha ET = 0$$

or

$$\frac{1}{r} \frac{d}{dr} \left(r \frac{d\Phi}{dr} \right) + \alpha ET = 0$$



SOLUTION (3.29)

(a) Let $C = \frac{-M}{2(\sin 2\alpha - 2\alpha \cos 2\alpha)}$, and

$$\Phi = C(\sin 2\theta - 2\theta \cos 2\alpha)$$

Various derivatives of Φ are:

$$\frac{\partial \Phi}{\partial r} = 0 \quad \frac{\partial^2 \Phi}{\partial r^2} = 0$$

$$\frac{\partial \Phi}{\partial \theta} = 2C \cos 2\theta - 2C \cos 2\alpha$$

$$\frac{\partial^2 \Phi}{\partial \theta^2} = -4C \sin 2\theta$$

and

$$\nabla^2 \Phi = \frac{1}{r^2} \frac{\partial^2 \Phi}{\partial \theta^2} = -\frac{4C \sin 2\theta}{r^2}$$

We thus obtain

$$\nabla^4 \Phi = C \left[\frac{8 \sin 2\theta}{r^4} - \frac{24 \sin 2\theta}{r^4} + \frac{16 \sin 2\theta}{r^4} \right] = 0$$



(b) $\sigma_r = \frac{1}{r^2} \frac{\partial^2 \Phi}{\partial \theta^2} = -\frac{4C \sin 2\theta}{r^2} \quad \sigma_\theta = 0$

$$\tau_{r\theta} = -\frac{\partial}{\partial r} \left(\frac{1}{r} \frac{\partial \Phi}{\partial \theta} \right) = \frac{2C}{r^2} (\cos 2\theta - \cos 2\alpha)$$



(c)

Letting $\alpha = \pi/2$: $C = -M/2\pi$. It follows that

$$\sigma_r = \frac{2M \sin 2\theta}{\pi r^2} \quad \sigma_\theta = 0$$

$$\tau_{r\theta} = \frac{2C}{r^2} (\cos 2\theta + 1) = -\frac{2M \cos^2 \theta}{\pi r^2}$$



where $\cos^2 \theta = (1 + \cos 2\theta)/2$



SOLUTION (3.30)

Using Eq. (3.48) and Fig. P3.30:

$$F_x = \int_0^{\pi/2} (\sigma_r r d\theta) \sin \theta = \int_0^{\pi/2} \left(\frac{2P}{\pi} \cos \theta \sin \theta \right) d\theta \\ = \frac{2P}{\pi} \left| \frac{1}{2} \sin^2 \theta \right|_0^{\pi/2} = \frac{P}{\pi}$$



Similarly,

$$F_y = \int_{-\pi/2}^{\pi/2} (\sigma_r r d\theta) \cos \theta = \int_{-\pi/2}^{\pi/2} \left(\frac{2P}{\pi} \cos^2 \theta \right) d\theta \\ = \frac{2P}{\pi} \left| \frac{\theta}{2} + \frac{1}{4} \sin 2\theta \right|_{-\pi/2}^{\pi/2} = P$$



SOLUTION (3.31)

NOTE: (In Probs. 3.31, 3.32, and 3.33), the P, L, and α are constants. It can readily be verified that, the maximum values of the functions in parentheses occur:

$$\begin{aligned}\frac{d}{d\theta}(\sin \theta \cos^3 \theta) &= 0, \text{ or } \tan^2 \theta = \frac{1}{3} && \text{when } \theta = \pm 30^\circ \\ \frac{d}{d\theta}(\sin^2 \theta \cos^2 \theta) &= 0, \text{ or } \tan^2 \theta = 1 && \text{when } \theta = \pm 45^\circ\end{aligned}$$

Maximum stresses, using Eqs. (3.37) and (3.43):

$$\begin{aligned}(\sigma_x)_{elast.} &= \frac{P}{L(\alpha + \frac{1}{2}\sin 2\alpha)} && (a) \\ (\tau_{xy})_{elast.} &= \frac{P \sin \theta \cos^3 \theta}{L(\alpha + \frac{1}{2}\sin 2\alpha)}\end{aligned}$$

Elementary solution of maximum stresses are

$$(\sigma_x)_{elem.} = \frac{P}{2L \tan \alpha}, \quad (\tau_{xy})_{elem.} = 0 \quad (b)$$

(a) For $\alpha = 15^\circ$, ($\alpha + \frac{1}{2}\sin 2\alpha = 0.512$):

$$\begin{aligned}(\sigma_x)_{elast.} &= P/0.512L && \text{at } \theta = 0^\circ \\ (\tau_{xy})_{elast.} &= P/2.195L && \text{at } \theta = 15^\circ \\ (\sigma_x)_{elem.} &= P/0.536L && \text{at any } \theta\end{aligned}$$

Thus,

$$(\sigma_x)_{elast.} = 1.047(\sigma_x)_{elem.} \quad \blacktriangleleft$$

(b) For $\alpha = 60^\circ$, ($\alpha + \frac{1}{2}\sin 2\alpha = 1.48$):

$$\begin{aligned}(\sigma_x)_{elast.} &= P/1.48L && \text{at } \theta = 0^\circ \\ (\tau_{xy})_{elast.} &= P/4.557L && \text{at } \theta = 30^\circ \\ (\sigma_x)_{elem.} &= P/3.464L && \text{at any } \theta\end{aligned}$$

Thus,

$$(\sigma_x)_{elast.} = 2.341(\sigma_x)_{elem.} \quad \blacktriangleleft$$

SOLUTION (3.32)

See: **NOTE**, solution of Prob. 3.31.

Substitute $\alpha = 30^\circ$ into Eqs. (a) and (b) of Solution of Prob. 3.31.

$$\begin{aligned}(\sigma_x)_{elast.} &= P/0.957L && \text{at } \theta = 0^\circ \\ (\tau_{xy})_{elast.} &= P/2.946L && \text{at } \theta = 30^\circ \\ (\sigma_x)_{elem.} &= P/1.155L && \text{at any } \theta\end{aligned}$$

Thus,

$$(\sigma_x)_{elast.} = 1.207(\sigma_x)_{elem.} \quad \blacktriangleleft$$

SOLUTION (3.33)

See: NOTE, solution of Prob. 3.31.

We have $r = L/\cos\theta$, $h_{mn}/2 = c = L \cdot \tan\alpha$, and $I = 2c^3/3$.

Equations (3.43) give

$$(\sigma_x)_{elast.} = \frac{F \sin\theta \cos^3\theta}{L(\alpha - \frac{1}{2}\sin 2\alpha)}$$

$$(\tau_{xy})_{elast.} = \frac{F \sin^2\theta \cos^2\theta}{L(\alpha - \frac{1}{2}\sin 2\alpha)}$$

Elementary solution:

$$(\sigma_x)_{elem.} = 3FL/2c^2, \quad (\tau_{xy})_{elem.} = 3F/4c$$

(a) For $\alpha = 15^\circ$, ($\alpha + \frac{1}{2}\sin 2\alpha = 0.512$):

$$(\sigma_x)_{elast.} = 19.43F/L \quad \text{at } \theta = 15^\circ$$

$$(\tau_{xy})_{elast.} = 5.21F/L \quad \text{at } \theta = 15^\circ$$

$$(\sigma_x)_{elem.} = 20.89F/L \quad \text{at } \theta = 15^\circ$$

$$(\tau_{xy})_{elem.} = 2.8F/L \quad \text{at } \theta = 0^\circ$$

Thus, $(\sigma_x)_{elast.} = 0.93(\sigma_x)_{elem.}$

$$(\tau_{xy})_{elast.} = 1.86(\tau_{xy})_{elem.}$$

(b) For $\alpha = 60^\circ$, ($\alpha - \frac{1}{2}\sin 2\alpha = 0.614$):

$$(\sigma_x)_{elast.} = 0.529F/L \quad \text{at } \theta = 30^\circ$$

$$(\tau_{xy})_{elast.} = 0.407F/L \quad \text{at } \theta = 45^\circ$$

$$(\sigma_x)_{elem.} = 0.5F/L \quad \text{at } \theta = 60^\circ$$

$$(\tau_{xy})_{elem.} = 0.433F/L \quad \text{at } \theta = 0^\circ$$

Thus,

$$(\sigma_x)_{elast.} = 1.058(\sigma_x)_{elem.}$$

$$(\tau_{xy})_{elast.} = 0.94(\tau_{xy})_{elem.}$$

SOLUTION (3.34)

With $x = r \cdot \cos\theta$, Eqs. (3.50) become

$$\sigma_x = -\left(\frac{2P}{\pi r}\right) \cos^3\theta$$

$$\sigma_y = -\left(\frac{2P}{\pi r}\right) \sin^2\theta \cos\theta$$

$$\tau_{xy} = -\left(\frac{2P}{\pi r}\right) \sin\theta \cos^2\theta$$

Substituting,

$$d\sigma_x = -\frac{2}{\pi r} \left(\frac{pr d\theta}{\cos\theta}\right) \cos^3\theta = -\frac{2p}{\pi} \cos^2\theta d\theta$$

$$d\sigma_y = -\frac{2p}{\pi} \sin^2\theta, \quad d\tau_{xy} = -\frac{p}{\pi} \sin 2\theta d\theta$$

(CONT.)

3.34 (CONT.)

Integrating,

$$\begin{aligned}\sigma_x &= -\frac{2p}{\pi} \int_{\theta_1}^{\theta_2} \cos^2 \theta d\theta = -\frac{p}{2\pi} [2(\theta_2 - \theta_1) + (\sin 2\theta_2 - \sin 2\theta_1)] \\ \sigma_y &= -\frac{p}{2\pi} [2(\theta_2 - \theta_1) - (\sin 2\theta_2 - \sin 2\theta_1)] \\ \tau_{xy} &= \frac{p}{2\pi} [\cos 2\theta_2 - \cos 2\theta_1]\end{aligned}$$



SOLUTION (3.35)

APPROACH (a):

$$\left(\frac{d^2}{dr^2} + \frac{1}{r} \frac{d}{dr} \right) \left(\frac{d^2 f_1}{dr^2} + \frac{1}{r} \frac{df_1}{dr} \right) = 0 \quad (d)$$

We have

$$\begin{aligned}\frac{d}{dr} \left(\frac{d^2 f_1}{dr^2} \right) &= \frac{d^3 f_1}{dr^3}, & \frac{d^2}{dr^2} \left(\frac{d^2 f_1}{dr^2} \right) &= \frac{d^4 f_1}{dr^4} \\ \frac{d}{dr} \left(\frac{1}{r} \frac{df_1}{dr} \right) &= -r^{-2} \frac{df_1}{dr} + r^{-1} \frac{d^2 f_1}{dr^2} \\ \frac{d^2}{dr^2} \left(\frac{1}{r} \frac{df_1}{dr} \right) &= \frac{2}{r^3} \frac{df_1}{dr} - \frac{2}{r} \frac{d^2 f_1}{dr^2} + \frac{1}{r} \frac{d^3 f_1}{dr^3} \\ \frac{1}{r} \frac{d}{dr} \left(\frac{d^2 f_1}{dr^2} \right) &= \frac{1}{r} \frac{d^3 f_1}{dr^3} \\ \frac{1}{r} \frac{d}{dr} \left(\frac{1}{r} \frac{df_1}{dr} \right) &= \frac{1}{r} \left(-\frac{1}{r^2} \frac{df_1}{dr} + \frac{1}{r} \frac{d^2 f_1}{dr^2} \right)\end{aligned}$$

Then, Eq. (d) becomes

$$\frac{d^4 f_1}{dr^4} + \frac{2}{r} \frac{d^3 f_1}{dr^3} - \frac{1}{r^2} \frac{d^2 f_1}{dr^2} + \frac{1}{r^3} \frac{df_1}{dr} = 0 \quad (d')$$

The first equation of Problem 3.35 may be written as:

$$\begin{aligned}\frac{1}{r} \frac{d}{dr} \left\{ r \frac{d}{dr} \left[r^{-1} \frac{d}{dr} \left(r \frac{df_1}{dr} \right) \right] \right\} &= 0 \\ \frac{1}{r} \frac{d}{dr} \left\{ r \frac{d}{dr} \left[r^{-1} \frac{df_1}{dr} + \frac{d^2 f_1}{dr^2} \right] \right\} &= 0 \\ \frac{1}{r} \frac{d}{dr} \left\{ r \left[-r^{-2} \frac{df_1}{dr} + r^{-1} \frac{d^2 f_1}{dr^2} + \frac{d^3 f_1}{dr^3} \right] \right\} &= 0 \\ \frac{1}{r} \frac{d}{dr} \left\{ -r^{-1} \frac{df_1}{dr} + \frac{d^2 f_1}{dr^2} + r \frac{d^3 f_1}{dr^3} \right\} &= 0 \\ \frac{1}{r} \left\{ r^{-2} \frac{df_1}{dr} - r^{-1} \frac{d^2 f_1}{dr^2} + 2 \frac{d^3 f_1}{dr^3} + r \frac{d^4 f_1}{dr^4} \right\} &= 0\end{aligned}$$

or $\frac{1}{r^3} \frac{df_1}{dr} - \frac{1}{r^2} \frac{d^2 f_1}{dr^2} + \frac{2}{r} \frac{d^3 f_1}{dr^3} + \frac{d^4 f_1}{dr^4} = 0$

which is the same as Eq. (d').

Now let us integrate the expression:

$$\begin{aligned}\frac{1}{r} \frac{d}{dr} \left\{ r \frac{d}{dr} \left[\frac{1}{r} \frac{d}{dr} \left(r \frac{df_1}{dr} \right) \right] \right\} &= 0 \\ r \frac{d}{dr} \left[\frac{1}{r} \frac{d}{dr} \left(r \frac{df_1}{dr} \right) \right] &= c_1 \\ \frac{1}{r} \frac{d}{dr} \left(r \frac{df_1}{dr} \right) &= c_1 \ln r + c_2 \\ r \frac{df_1}{dr} &= c_1 \int r \ln r dr + c_2 \int r dr \\ r \frac{df_1}{dr} &= c_1 \left[\frac{r^2}{2} \ln r - \frac{r^4}{4} \right] + c_2 \frac{r^2}{2} + c_3 \\ \frac{df_1}{dr} &= c_1 r \ln r + c_2 r^2 + c_3 \ln r + c_4\end{aligned}$$

(CONT.)

3.35 (CONT.)

$$\text{or } f_1 = c_1 r^2 \ln r + c_2 r^2 + c_3 \ln r + c_4$$

Expression (e) may be treated in a like manner.

APPROACH (b):

Letting $t = \ln r$, we have

$$\begin{aligned}\frac{df_1}{dr} &= \frac{df_1}{dt} \frac{dt}{dr} = \frac{1}{r} \frac{df_1}{dt} \\ \frac{d^2 f_1}{dr^2} &= \frac{1}{r^2} \left(\frac{d^2 f_1}{dt^2} - \frac{df_1}{dt} \right) \\ \frac{d^3 f_1}{dr^3} &= \frac{1}{r^3} \left(\frac{d^3 f_1}{dt^3} - 3 \frac{d^2 f_1}{dt^2} + 2 \frac{df_1}{dt} \right) \\ \frac{d^4 f_1}{dr^4} &= \frac{1}{r} \left(\frac{d^4 f_1}{dt^4} - 6 \frac{d^3 f_1}{dt^3} + 11 \frac{d^2 f_1}{dt^2} - 6 \frac{df_1}{dt} \right)\end{aligned}$$

Substituting these derivatives into Eq. (d'), we obtain:

$$\frac{d^4 f_1}{dt^4} - 4 \frac{d^3 f_1}{dt^3} + 4 \frac{d^2 f_1}{dt^2} = 0$$

This is an ordinary differential equation with constant coefficients. It has a solution

$$f_1 = c_1 r^2 \ln r + c_2 r^2 + c_3 \ln r + c_4$$


In a like manner, it can be shown that,

$$\left(\frac{d^2}{dr^2} + \frac{1}{r} \frac{d}{dr} - \frac{4}{r^2} \right) \left(\frac{d^2 f_2}{dr^2} + \frac{1}{r} \frac{df_2}{dr} - \frac{4f_2}{r^2} \right) = 0$$

is solved to yield Eq. (g) of Section 3.12.

SOLUTION (3.36)

(a)

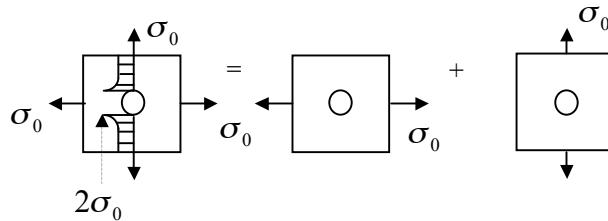

$$\sigma_{r1} = \frac{\sigma_0}{2} \left[\left(1 - \frac{a^2}{r^2} \right) + \left(1 + \frac{3a^4}{r^4} - \frac{4a^2}{r^2} \right) \cos 2\theta \right]$$

$$\sigma_{\theta 1} = \frac{\sigma_0}{2} \left[\left(1 + \frac{a^2}{r^2} \right) - \left(1 + \frac{3a^4}{r^4} \right) \cos 2\theta \right]$$

$$\tau_{r\theta 1} = -\frac{\sigma_0}{2} \left(1 - \frac{3a^4}{r^4} + \frac{2a^2}{r^2} \right) \sin 2\theta$$

and

$$\sigma_{r2} = \frac{\sigma_0}{2} \left[\left(1 - \frac{a^2}{r^2} \right) + \left(1 + \frac{3a^4}{r^4} - \frac{4a^2}{r^2} \right) \cos 2(\theta + 90^\circ) \right]$$

$$\sigma_{\theta 2} = \frac{\sigma_0}{2} \left[\left(1 + \frac{a^2}{r^2} \right) - \left(1 + \frac{3a^4}{r^4} \right) \cos 2(\theta + 90^\circ) \right]$$

$$\tau_{r\theta 2} = -\frac{\sigma_0}{2} \left(1 - \frac{3a^4}{r^4} + \frac{2a^2}{r^2} \right) \cos 2(\theta + 90^\circ)$$

(CONT.)

3.36 (CONT.)

We have, by superposition:

$$\sigma_r = \sigma_{r1} + \sigma_{r2} \quad \sigma_\theta = \sigma_{\theta1} + \sigma_{\theta2} \quad \tau_{r\theta} = \tau_{r\theta1} + \tau_{r\theta2}$$

Hence, at $r=a$ and $\theta = \pi/2$,

$$\begin{aligned}\sigma_{r1} &= 0 & \sigma_{r2} &= 0 \\ \sigma_{\theta1} &= 3\sigma_0 & \sigma_{\theta2} &= -\sigma_0 \\ \tau_{r\theta1} &= 0 & \tau_{r\theta2} &= 0\end{aligned}$$

lead to the solution:

$$\sigma_r = 0 \quad \sigma_\theta = 2\sigma_0 \quad \tau_{r\theta} = 0 \quad \blacktriangleleft$$

(b) Referring to the results of part (a), we write

$$\begin{aligned}\sigma_{r1} &= 0 & \sigma_{r2} &= 0 \\ \sigma_{\theta1} &= 3\sigma_0 & \sigma_{\theta2} &= \sigma_0 \\ \tau_{r\theta1} &= 0 & \tau_{r\theta2} &= 0\end{aligned}$$

Thus,

$$\sigma_r = 0 \quad \sigma_\theta = 4\sigma_0 \quad \tau_{r\theta} = 0 \quad \blacktriangleleft$$

SOLUTION (3.37)

We have

$$\frac{d}{D} = \frac{1}{3}$$

Then, from Fig. D.8: $K \approx 2.3$. Hence

$$\sigma_{\max} = K \frac{P}{A} = 2.3 \frac{180(10^3)}{(150-50)20} = 207 \text{ MPa} \quad \blacktriangleleft$$

SOLUTION (3.38)

$$K = \frac{\sigma_{\max}}{\sigma_{nom}} = \frac{130}{80} = 1.625$$

From Fig. D.1: $r/d = 0.25$. Then

$$D = 2r + d$$

gives

$$40 = 2(0.25d) + d = 1.5d$$

or

$$d = 26.7 \text{ mm} \quad \blacktriangleleft$$

$$r = 6.67 \text{ mm}$$

SOLUTION (3.39)

$$\text{For } \frac{r}{d} = 0.15 :$$

$$D = 2r + d; \quad 40 = 2(0.15d) + d = 1.3d$$

(CONT.)

3.39 (CONT.)

or $d = 30.76$ We thus have

$$\frac{D}{d} = 1.3$$

Figure D.1 gives $K \approx 1.7$. Hence,

$$\sigma_{\max} = 250(10^6) = 1.7 \frac{P_{all}}{(20)(30.76)}$$

or $P_{all} = 90.5 \text{ kN}$



SOLUTION (3.40)

$$T_{BC} = 1 \text{ kN} \cdot \text{m} \longrightarrow T_{AB} = 2 \text{ kN} \cdot \text{m} \longrightarrow$$

Then, $\tau_{\max} = 2T/\pi c^3$ yields

$$\tau_{BC} = \frac{2(1 \times 10^3)}{\pi(0.02)^3} = 79.6 \text{ MPa}$$

$$\tau_{AB} = \frac{2(2 \times 10^3)}{\pi(0.025)^3} = 81.5 \text{ MPa}$$

Thus

$$\tau_{\max} = K\tau_{AB} = (1.6)(81.5) = 130.4 \text{ MPa}$$



SOLUTION (3.41)

(a) We have

$$\frac{D}{d} = \frac{40}{35} = 1.14 \quad \frac{r}{d} = \frac{2}{35} = 0.057$$

Hence, by Fig. D.4, $K \approx 1.6$.

We have

$$J = \frac{\pi}{32}(d)^4 = \frac{\pi}{32}(35)^4 = 147.3(10^3) \text{ mm}^4$$

$$\text{So } \tau_{yp} = K \frac{Tc}{J} = 1.6 \left[\frac{100(0.0175)}{147.3(10^{-9})} \right] = 19 \text{ MPa}$$



SOLUTION (3.42)

We have

$$\frac{D}{d} = \frac{40}{16} = 2.5 \quad \frac{r}{d} = \frac{8}{16} = 0.2$$

From Fig. D.6, $K \approx 1.31$

$$\tau_{\max} = \tau_{all} = K \frac{Tc}{J}; \quad 250(10^6) = 1.31 \left[\frac{16T}{\pi(0.016)^3} \right]$$

or

$$T = 153.5 \text{ N} \cdot \text{m}$$



SOLUTION (3.43)

$$\frac{D}{d} = \frac{37.5}{25} = 1.5, \quad \frac{r}{d} = \frac{5}{25} = 0.2$$

Figure D.1, $K = 1.72$.

Hence $\sigma_{nom} = \frac{\sigma_{max}}{1.72} = \frac{210/1.4}{1.72} = 87.2 \text{ MPa}$

and $P_{all} = A\sigma_{nom} = (25 \times 10)(87.2) = 21.8 \text{ kN}$



SOLUTION (3.44)

At a section through B

$$M_B = 400(0.3) = 120 \text{ N}\cdot\text{m}$$

$$\sigma_{nom} = \frac{M_B c}{I} = \frac{120(0.02)}{\frac{1}{12}(0.012)(0.04)^3} = 37.5 \text{ MPa}$$

(a) $\frac{r}{d} = \frac{5}{40} = 0.125 \quad \frac{D}{d} = \frac{60}{40} = 1.5 : \quad K \approx 1.65 \quad (\text{Fig. D.2})$


$\sigma_{max} = 1.65(37.5) = 61.9 \text{ MPa}$



(b) $\frac{r}{d} = \frac{10}{40} = 0.25 \quad \frac{D}{d} = \frac{60}{40} = 1.5 : \quad K \approx 1.41 \text{ (Fig. D.2)}$

$\sigma_{max} = 1.41(37.5) = 52.8 \text{ MPa}$

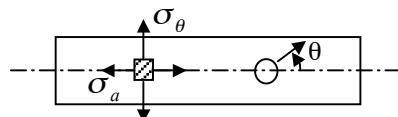


SOLUTION (3.45)


Without hole:

$$\sigma_\theta = \frac{pd}{2t} \quad \sigma_a = \frac{pd}{4t}$$

With hole:

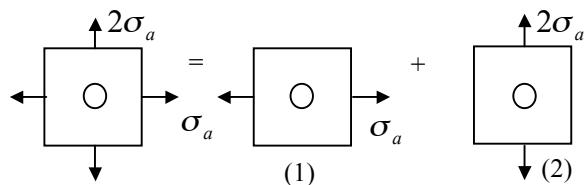

(CONT.)

3.45 (CONT.)

We use Eq. (3.55b), with r=a.

$$\begin{aligned}\sigma_{\theta 1} &= \frac{\sigma_a}{2} \left[\left(1 + \frac{a^2}{a^2}\right) - \left(1 + \frac{3a^4}{a^4}\right) \cos 2\theta \right] \\ &= \sigma_a [1 - 2 \cos 2\theta] \\ \sigma_{\theta 2} &= 2\sigma_a [1 - 2 \cos 2(\theta + 90^\circ)]\end{aligned}$$

For $\theta = 0^\circ$:

$$\sigma_{\theta 1} = -\sigma_a \quad \sigma_{\theta 2} = 6\sigma_a$$

For $\theta = \pi/2$:

$$\sigma_{\theta 1} = 3\sigma_a \quad \sigma_{\theta 2} = -2\sigma_a$$

Therefore, superposing the results at $\theta = 0^\circ$:

$$\sigma_\theta = 5\sigma_a = 5pd/4t$$

at $\theta = \pi/2$:

$$\sigma_\theta = \sigma_a = pd/4t$$

SOLUTION (3.46)

(a) We have D/d=1.1 and r/d=0.05. Then, we find from Figs. D.6, D.7, and D.5 that

$$K_t = 1.64 \quad K_b = 2.2 \quad K_a = 2.3$$

Then, Eqs. (b) of Example 3.5 yield

$$\sigma_x = 2.3 \frac{50(10^3)}{\pi(0.2)^2} + 2.2 \frac{4(10 \times 10^3)}{\pi(0.2)^3} = 4.42 \text{ MPa}$$

$$\tau_{xy} = 1.64 \frac{2(20 \times 10^3)}{\pi(0.2)^3} = 2.61 \text{ MPa}$$

Equation (a) of Example 3.4 is therefore

$$\sigma_{1,2} = \frac{4.42}{2} \pm \left[\left(\frac{4.42}{2} \right)^2 + (2.61)^2 \right]^{\frac{1}{2}}$$

or $\sigma_1 = 5.63 \text{ MPa} \quad \sigma_2 = -1.21 \text{ MPa}$

(b) $\tau_{\max} = \frac{1}{2}(5.63 + 1.21) = 3.42 \text{ MPa}$

(c) $\sigma_{oct} = \frac{1}{3}(5.63 - 1.21) = 1.47 \text{ MPa}$

$$\tau_{oct} = \frac{1}{3}[(5.63 + 1.21)^2 + (-1.21)^2 + (-5.63)^2]^{\frac{1}{2}} = 2.98 \text{ MPa}$$

SOLUTION (3.47)

(a) We have D/d=2 and r/d=0.04. Then, we find from Figs. D.7 and D.6 that

$$K_b = 2.6 \quad K_t = 1.9$$

Equation (b) of Example 3.5 is therefore

$$\sigma_x = 2.6 \frac{4(20 \times 10^3)}{\pi(0.125)^2} = 33.9 \text{ MPa}$$

$$\tau_{xy} = 1.9 \frac{2(5 \times 10^3)}{\pi(0.125)^3} = 9.73 \text{ MPa}$$

(CONT.)

3.47 (CONT.)

Equation (a) of Example 3.5:

$$\sigma_{1,2} = \frac{33.9}{2} \pm \left[\left(\frac{33.9}{2} \right)^2 + (9.73)^2 \right]^{\frac{1}{2}}$$

or $\sigma_1 = 36.5 \text{ MPa}$ $\sigma_2 = -2.59 \text{ MPa}$

(b) $\tau_{\max} = \frac{1}{2}(36.5 + 2.59) = 16.96 \text{ MPa}$

(c) $\sigma_{oct} = \frac{1}{3}(36.5 - 2.59) = 11.3 \text{ MPa}$

$$\tau_{oct} = \frac{1}{3}[(36.5 + 2.59)^2 + (-2.59)^2 + (-36.5)^2]^{\frac{1}{2}} = 17.85 \text{ MPa}$$

SOLUTION (3.48)

We apply Eqs. (3.63).

(a) $a = 0.88 \left[\frac{2(500)(0.025 \times 0.0375)}{(200 \times 10^9)(0.0125)} \right]^{\frac{1}{3}} = 0.635 \text{ mm}$

(b) $\sigma_c = 0.62 [500(200 \times 10^9)^2 \left(\frac{0.0125}{2 \times 0.025 \times 0.0375} \right)^2]^{\frac{1}{3}} = 596.1 \text{ MPa}$

(c) $\delta = 1.54 [(500)^2 \left(\frac{0.0125}{2(200 \times 10^9)^2 (0.025 \times 0.0375)} \right)]^{\frac{1}{3}} = 5.339(10^{-3}) \text{ mm}$

SOLUTION (3.49)

(a) Use Eq. (3.62):

$$\sigma_c = 0.62 \left[\frac{500(200 \times 10^9)^2}{4(0.025)^2} \right]^{\frac{1}{3}} = 1233 \text{ MPa}$$

(b) Apply Eqs. (3.60) and (3.59) for $r_1 = r_2 = r$ and $E_1 = E_2 = E$ to obtain the formula

$$\sigma_c = 0.617 \left[\frac{PE^2}{r^2} \right]^{\frac{1}{3}}$$

Thus, $\sigma_c = 0.617 \left[\frac{500(200 \times 10^9)^2}{(0.025)^2} \right]^{\frac{1}{3}} = 1959 \text{ MPa}$

SOLUTION (3.50)

Using Eqs. (3.73), (3.74), and the second of (3.70), we have

$$m = \frac{4}{(1/0.4)+(1/0.25)} = 0.6154$$

$$n = \frac{4(200 \times 10^9)}{3(1-0.3^2)} = 2.9304(10^{11})$$

$$\cos \alpha = \pm \frac{(1/0.4)-(1/0.25)}{(1/0.4)+(1/0.25)} = 0.2308 \quad \text{or} \quad \alpha = 76.66^\circ$$

Interpolating Table 3.3:

$$c_a = 1.1774 \quad c_b = 0.8616$$

Apply Eqs. (3.69):

$$a = 1.1774 \left[\frac{4(10^3)(0.6154)}{2.9304 \times 10^{11}} \right]^{\frac{1}{3}} = 2.393 \text{ mm}$$

$$b = 0.8616 \left[\frac{4(10^3)(0.6154)}{2.9304 \times 10^{11}} \right]^{\frac{1}{3}} = 1.752 \text{ mm}$$

Thus,

$$\sigma_c = 1.5 \frac{4(10^3)}{\pi(2.393 \times 1.752)10^{-6}} = 455.5 \text{ MPa}$$

SOLUTION (3.51)

Use Eqs. (3.67):

$$\sigma_c = 0.418 \left[\frac{2.5(10^3)(200 \times 10^9)}{0.1(0.005)} \right]^{\frac{1}{2}} = 418 \text{ MPa} \quad \blacktriangleleft$$

$$2b = 2 \left\{ 1.52 \left[\frac{2.5(10^3)(0.005)}{200 \times 10^9(0.1)} \right]^{\frac{1}{2}} \right\} = 2(0.038) = 0.076 \text{ mm} \quad \blacktriangleleft$$

SOLUTION (3.52)

Equations (3.65), for $\nu_1 = \nu_2 = 0.25$, $E_1 = E_2 = E$, $r_1 = r_2 = r$:

$$\sigma_c = 0.412 \left[\frac{2(10^6)(200 \times 10^9)(2)}{0.2} \right]^{\frac{1}{2}} = 824 \text{ MPa} \quad \blacktriangleleft$$

$$2b = 2 \left\{ 1.545 \left[\frac{2(10^6)(0.2)}{200 \times 10^9(2)} \right]^{\frac{1}{2}} \right\} = 2(1.545) = 3.09 \text{ mm} \quad \blacktriangleleft$$

SOLUTION (3.53)

Refer to Example 3.6.

$$1/r_1' = 0 \quad 1/r_2' = 0 \quad \theta = \pi/2$$

$$m = \frac{4}{(1/0.5)+(1/0.2)} = 0.5714$$

$$n = \frac{4(210 \times 10^9)}{3(1-0.25^2)} = 2.9867(10^{11})$$

$$\cos \alpha = \pm \frac{(1/0.5)-(1/0.2)}{(1/0.5)+(1/0.2)} = 0.4286 \quad \text{or} \quad \alpha = 64.62^\circ$$

Table 3.3: $c_a = 1.3862$ $c_b = 0.7758$

$$a = 1.3862 \left[\frac{5 \times 10^3(0.5714)}{2.9867 \times 10^{11}} \right]^{\frac{1}{3}} = 2.994 \text{ mm} \quad \blacktriangleleft$$

$$b = 0.7558 \left[\frac{5 \times 10^3(0.5714)}{2.9867 \times 10^{11}} \right]^{\frac{1}{3}} = 1.605 \text{ mm} \quad \blacktriangleleft$$

$$\text{Thus, } \sigma_c = 1.5 \frac{5(10^3)}{\pi(2.994 \times 1.605)10^{-6}} = 505.2 \text{ MPa} \quad \blacktriangleleft$$

SOLUTION (3.54)

Refer to Example 3.6. We now have $r_1 = r_2 = r$. Thus, Equations (3.75) and (3.76) become

$$m = \frac{4}{(1/r)+(1/r)} = 2r = 2(0.2) = 0.4$$

$$\cos \alpha = \frac{(1/r)-(1/r)}{(1/r)+(1/r)} = 0, \quad \alpha = 90^\circ$$

From Table 3.3 it can be concluded that surface of contact has a circular boundary: $c_a = c_b = 1$.

$$n = \frac{4(210 \times 10^9)}{3(1-0.25^2)} = 2.98667(10^{11})$$

$$a = b = 1 \left[\frac{5(10^3)(0.4)}{2.98667 \times 10^{11}} \right]^{\frac{1}{3}} = 1.885 \text{ mm} \quad \blacktriangleleft$$

Thus,

$$\sigma_c = 1.5 \frac{5(10^3)}{\pi(1.885)^2 10^{-6}} = 671.9 \text{ MPa} \quad \blacktriangleleft$$

SOLUTION (3.55)

Case B (1st column), Table 3.2 with $r_1 = r_2$, $E_1 = E_2$.

$$(a) \Delta = \frac{1}{E} + \frac{1}{E} = \frac{2}{E} \quad m = \frac{1}{r} + \frac{1}{r} = \frac{2}{r}$$

$$a = 0.88\sqrt[3]{F \frac{r}{E}} = 0.88\sqrt[3]{400 \frac{0.17}{210(10^9)}} = 0.604 \text{ mm} \quad \blacktriangleleft$$

$$(b) p_0 = 1.5 \frac{P}{\pi a^2} = 1.5 \frac{400}{\pi (0.604)^2 (10^{-6})} = 349 \text{ MPa} \quad \blacktriangleleft$$

(c) Equations (3.68) at z=0:

$$\sigma_x = \sigma_y = -p_0[(1+\nu) - \frac{1}{2}] = -\frac{1+2\nu}{2} p_0 = -0.8(349) = -279 \text{ MPa}$$

$$\sigma_z = -p_0 = -349 \text{ MPa}$$

$$\tau_{yz} = \tau_{xz} = \frac{1}{2}(\sigma_x - \sigma_z) = -\frac{p_0}{2}(0.8 - 1) = 34.9 \text{ MPa} \quad \blacktriangleleft$$

SOLUTION (3.56)

Refer 2nd column of C, Table 3.2.

$$E_1 = E_2 = E = 210 \text{ GPa} \quad r_1 = 8 \text{ mm} \quad r_2 = 50 \text{ mm} \quad F_1 = 240 \text{ kN/m}$$

Hence

$$\Delta = \frac{2}{E} = \frac{2}{210(10^9)} = \frac{1}{105(10^9)}, \quad n = \frac{1}{0.008} - \frac{1}{0.05} = 105$$

$$(a) a = 1.076 \left[\frac{240(10^3)}{105(10^9)(105)} \right]^{\frac{1}{2}} = 0.159 \text{ mm} \quad \blacktriangleleft$$

$$(b) p_0 = \frac{2}{\pi} \frac{F}{aL} = \frac{2}{\pi} \frac{240(10^3)}{0.159(10^{-3})} = 961 \text{ MPa} \quad \blacktriangleleft$$

SOLUTION (3.57)

We have $r_1 = 0.48 \text{ m}$, $r_2 = 0.34 \text{ m}$, $r_1' = \infty$, $r_2' = \infty$, and $\theta = 90^\circ$. Thus, using Eqs.(3.72) through (3.74):

$$m = \frac{4}{\frac{1}{0.48} + \frac{1}{0.34}} = 0.796 \quad n = \frac{4(210 \times 10^9)}{3(1-0.09)} = 3.0769(10^{11})$$

$$A = \frac{2}{m}, \quad B = \pm \frac{1}{2} \left(\frac{1}{r_1} - \frac{1}{r_2} \right)$$

$$\cos \alpha = \frac{B}{A} = \pm \frac{1/0.48 - 1/0.34}{1/0.48 + 1/0.34} = 0.143, \quad \alpha = 81.78^\circ$$

Interpolating from Table 3.3: $c_a = 1.104$, $c_b = 0.911$. Hence

$$a = 1.104 \left[\frac{4(10^3)(0.796)}{3.0769(10^{11})} \right]^{\frac{1}{3}} = 2.4058 \text{ mm}$$

$$b = 0.911 \left[\frac{4(10^3)(0.796)}{3.0769(10^{11})} \right]^{\frac{1}{3}} = 1.9852 \text{ mm}$$

$$\text{Thus } p_0 = 1.5 \frac{F}{\pi ab} = 1.5 \frac{4(10^3)}{\pi (2.4058 \times 1.9852 \times 10^{-6})} = 400 \text{ MPa} \quad \blacktriangleleft$$

SOLUTION (3.58)

Given quantities are:

$$r_1 = r_1' = 0.025 \text{ m} \quad r_2 = -0.03 \text{ m}$$
$$r_2' = -0.125 \text{ m} \quad \nu = 0.3 \quad E = 200 \text{ GPa}$$

Thus,

$$m = \frac{4}{\frac{1}{0.025} + \frac{1}{0.025} - \frac{1}{0.3} - \frac{1}{0.125}} = 0.10345$$

$$n = \frac{4(200 \times 10^9)}{3(1-0.09)} = 293.04029(10^9)$$

Also

$$A = \frac{2}{m} = \frac{2}{0.10345} = 19.33301$$

$$B = \frac{1}{2} [(0)^2 + (\frac{1}{r_2} - \frac{1}{r_2'}) + 2(0)]^{\frac{1}{2}} = 12.66667$$

$$\alpha = \cos^{-1} \frac{12.66667}{19.33301} = 49.06645^\circ$$

From Table 3.3, we find

$$c_a = 1.78611 \quad c_b = 0.63409$$

The semiaxes are then

$$a = 1.78611 \left[\frac{1800(0.10345)}{293.04029(10^9)} \right]^{\frac{1}{3}} = 0.00154 \text{ m} = 1.54 \text{ mm}$$

$$b = 0.67409 \left[\frac{1800(0.10345)}{293.04029(10^9)} \right]^{\frac{1}{3}} = 0.00055 \text{ m} = 0.55 \text{ mm}$$

Maximum contact pressure is therefore

$$\sigma_c = 1.5 \frac{1800}{\pi(1.54 \times 0.55)(10^{-6})} = 1014.7 \text{ MPa}$$
 ◀

SOLUTION (3.59)

Now given data is as follows:

$$r_1 = r_1' = 0.02 \text{ m} \quad r_2 = -0.022 \text{ m}$$
$$r_2' = -0.125 \text{ m} \quad \nu = 0.3 \quad E = 200 \text{ GPa}$$

Therefore,

$$m = \frac{4}{\frac{1}{0.02} + \frac{1}{0.02} - \frac{1}{0.022} - \frac{1}{0.125}} = 0.08594$$

$$n = \frac{4(200 \times 10^9)}{3(1-0.09)} = 293.0403(10^9)$$

We have

$$A = \frac{2}{m} = 23.2721$$

$$B = \pm \frac{1}{2} \left[-\frac{1}{0.022} + \frac{1}{0.125} \right] = 18.7273$$

$$\alpha = \cos^{-1} \frac{18.7273}{23.2721} = 36.42^\circ$$

Using Table 3.3

$$c_a = 2.323 \quad c_b = 0.541$$

(CONT.)

3.59 (CONT.)

Then, the semiaxes are:

$$a = 2.323 \left[\frac{1800(0.08594)}{293.0403 \times 10^9} \right]^{\frac{1}{3}} = 0.00188 \text{ m} = 1.88 \text{ mm}$$

$$b = 0.541 \left[\frac{1800(0.08594)}{293.0403 \times 10^9} \right]^{\frac{1}{3}} = 0.00044 \text{ m} = 0.44 \text{ mm}$$

Maximum contact stress is now obtained as


$$\sigma_c = 1.5 \frac{1800}{\pi(1.88 \times 0.44)10^{-6}} = 1039 \text{ MPa}$$



End of Chapter 3

CHAPTER 4

SOLUTION (4.1)

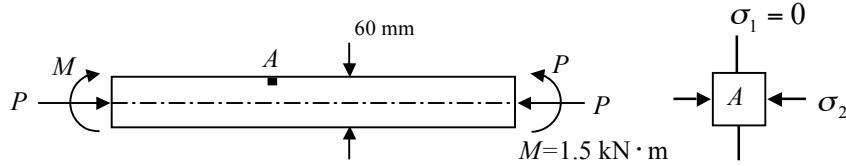

$$\sigma_2 = -\frac{P}{A} - \frac{Mc}{I} = -\frac{4P}{\pi(0.06)^2} - \frac{32(1.5 \times 10^3)}{\pi(0.06)^3}$$

$$= -353.7 - 70.74 \times 10^6$$

We have

$$\sigma_1^2 - \sigma_1 \sigma_2 + \sigma_2^2 = \sigma_{yp}^2 \quad \text{or} \quad |\sigma_2| = |\sigma_{yp}|$$


So,

$$353.7 + 70.74 \times 10^6 = 250 \times 10^6, \quad P_{all} = 707 \text{ kN}$$



SOLUTION (4.2)

$$p = 7.86(9.81)(\pi d^2/4) = 60.6d^2 \text{ kN/m}$$

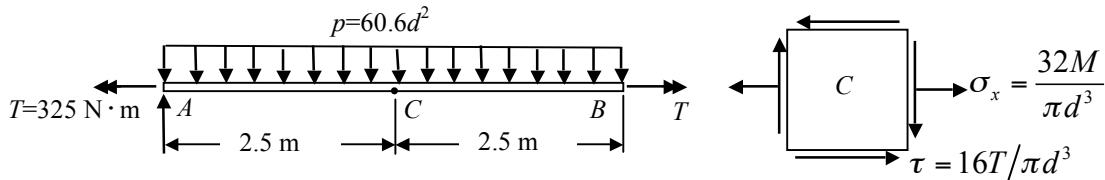

$$\sigma_x = \frac{32(pL^2/8)}{\pi d^3} = \frac{32(60.6d^2)(25)10^3}{8\pi d^3} = \frac{1.93 \times 10^6}{d}$$

$$\tau = -\frac{16(325)}{\pi d^3} = -\frac{1.66 \times 10^3}{d^3}$$

$$\text{Equation (4.9a), } \sigma_x^2 + 3\tau^2 = \sigma_{all}^2$$

$$\left(\frac{1.93 \times 10^6}{d}\right)^2 + 3\left(\frac{-1.66 \times 10^3}{d^3}\right)^2 = (100 \times 10^6)^2$$

or

$$\frac{3.725 \times 10^6}{d^2} + \frac{8.267}{d^6} = 100 \times 10^8$$

Solving by trial & error: $d = 32.8 \text{ mm}$

Use a 33-mm diameter shaft.



SOLUTION (4.3)

$$\sigma_y = 100 \text{ MPa} \quad \tau_{xy} = -80 \text{ MPa} \quad \sigma_x = 0$$

$$\sigma_{yp} = 250 \text{ MPa} \text{ (Table D.1)}$$

Hence

$$\begin{aligned}\sigma_{1,2} &= \frac{\sigma_y}{2} \pm \sqrt{\left(\frac{-\sigma_y}{2}\right)^2 + \tau_{xy}^2} \\ &= 50 \pm \sqrt{(-50)^2 + (-80)^2} = 50 \pm 94.3\end{aligned}$$

or

$$\sigma_1 = 144.3 \text{ MPa} \quad \sigma_2 = -43.3 \text{ MPa}$$

- (a) Maximum shear stress memory:

$$|\sigma_1 - \sigma_2| \leq \frac{\sigma_{yp}}{n}$$

$$|144.3 - (-43.3)| \leq \frac{250}{1.5}$$

$$187.6 > 166.7$$

Failure will occur.



- (b) Maximum energy of distortion theory:

$$\sigma_1^2 - \sigma_1 \sigma_2 + \sigma_2^2 \leq \left(\frac{\sigma_{yp}}{n}\right)$$

$$\left|(144.3)^2 - (144.3)(-43.3) - (-43.3)^2\right|^{1/2} \leq 166.7$$

$$160.1 < 166.7$$

Failure will not occur.



SOLUTION (4.4)

State of stress is given by

$$\sigma_1 = \sigma = \frac{32M}{\pi(0.1)^3} + \frac{4P}{\pi(0.1)^2}, \quad \sigma_2 = \sigma_3 = 0$$

Refer to Table 4.1 and Eq. (2.66):

$$0.47\sigma_{yp} = 0.47\sigma \text{ or } \sigma_{yp} = \sigma$$

$$\text{Thus, } 221(10^3) = \frac{32(17)}{\pi(0.1)^3} + \frac{4P}{\pi(0.1)^2}$$

Solving,

$$P = 375.7 \text{ kN}$$



SOLUTION (4.5)

From Table D.1: $\sigma_{yp} = 250 \text{ MPa}$

We have

$$\sigma_{1,2} = \frac{-30 \pm 90}{2} \pm \left[\left(\frac{-30-90}{2}\right)^2 + (-40)^2\right]^{\frac{1}{2}}$$

(CONT.)

4.5 (CONT.)

$$\text{or } \sigma_1 = 102.1 \text{ MPa} \quad \sigma_2 = -42.1 \text{ MPa}$$

(a) Equation (4.2a) gives

$$|102.1 + 42.1| = \frac{250}{n}$$

$$\text{or } n = 1.73$$



(b) Equation (4.5a) leads to

$$(102.1)^2 - (102.1)(-42.1) + (-42.1)^2 = \left(\frac{250}{n}\right)^2$$

from which

$$n = 1.95$$



SOLUTION (4.6)

Referring to Appendix B, we obtain

$$\sigma_1 = 101.3 \text{ MPa} \quad \sigma_2 = 0 \quad \sigma_3 = -51.32 \text{ MPa}$$

(a) $|\sigma_1 - \sigma_3| = \sigma_{yp}$

$$\text{or } \sigma_{yp} = |101.3 + 51.32| = 152.6 \text{ MPa}$$



(b) $\tau_{oct} = \frac{1}{3}[(101.3)^2 + (101.3 + 51.32)^2 + (51.32)^2]^{\frac{1}{2}} = 63.41 \text{ MPa}$

Thus,

$$\sigma_{yp} = 63.41/0.47 = 134.9 \text{ MPa}$$



SOLUTION (4.7)

Using Eq. (4.6), we have

$$0.47 \frac{\sigma_{yp}}{n} = \frac{1}{3}[(\sigma_1 - \sigma_2)^2 + \sigma_1^2 + \sigma_2^2]^{\frac{1}{2}} \quad (\text{a})$$

Here

$$\sigma_{1,2} = \frac{\sigma}{2} \pm \frac{1}{2}[\sigma^2 + 4\tau^2]^{\frac{1}{2}}$$

$$\text{and } \sigma = \frac{32M}{\pi d^3} + \frac{4P}{\pi d^2}, \quad \tau = \frac{16T}{\pi d^3}$$

Substituting the given data:

$$\begin{aligned} \sigma_{1,2} &= \frac{1}{2} \left[\frac{32(4 \times 10^3)}{\pi(0.12)^3} + \frac{4(45 \times 10^3)}{\pi(0.12)^2} \right] \\ &\pm \frac{1}{2} \left\{ \left[\frac{32(4 \times 10^3)}{\pi(0.12)^3} + \frac{4(45 \times 10^3)}{\pi(0.12)^2} \right]^2 + 4 \left[\frac{16(11.2 \times 10^3)}{\pi(0.12)^3} \right]^2 \right\}^{\frac{1}{2}} \end{aligned}$$

$$\text{Or } \sigma_1 = 49.55 \text{ MPa} \quad \sigma_2 = -21.99 \text{ MPa}$$

Equation (a) is then

$$1.41 \frac{280}{n} = [(71.54)^2 + (49.55)^2 + (-21.99)^2]^{\frac{1}{2}}$$

Solving,

$$n = 4.4$$



SOLUTION (4.8)

Maximum stresses, occurring at the fixed end are:

$$\sigma = \frac{Mc}{I} = \frac{450(0.25t)}{2t^4/3} = \frac{168.75}{t^3}$$

$$\tau = \frac{3}{2} \frac{450}{2t^2} = \frac{337.5}{t^2}$$

From Eq. (4.9a), we have

$$\sigma_{yp}^2 = \sigma^2 + 3\tau^2 = (280 \times 10^6)^2$$

Therefore, at neutral axis $\sigma = 0$:

$$\sigma_{yp} = \sqrt{3}\tau \text{ gives } t = 1.45 \text{ mm}$$

At the extreme fibers, $\tau = 0$:

$$\sigma_{yp} = \sigma \text{ gives } t = 8.45 \text{ mm}$$

Allowable width is thus

$$t_{all} = 8.45 \text{ mm}$$



SOLUTION (4.9)

We have

$$\tau_{yp} = \frac{\sigma_{yp}}{2} = 175 \text{ MPa}, \quad \sigma_1 = -\sigma_2 = \tau$$

(a) $\frac{175}{1.5} = \frac{16(500)}{\pi d^3}$

or

$$d = 27.95 \text{ mm}$$



$$(b) \quad \sigma_{1,2} = \frac{\sigma}{2} \pm \frac{1}{2} \sqrt{\sigma^2 + 4\tau^2}$$

Here

$$\begin{aligned} \sigma &= \frac{32M}{\pi d^3} = \frac{32(pL^2/8)}{\pi d^3} \\ &= \frac{32}{8\pi d^3} [\frac{1}{4} \pi d^2 (77 \times 10^3) 10^2] \\ &= 77(10^5)/d \\ \tau &= \frac{16T}{\pi d^3} = \frac{16(500)}{\pi d^3} = 2547.77/d^3 \end{aligned}$$

Using Eq. (4.8a):

$$\begin{aligned} \frac{\sigma_{yp}}{n} &= \sqrt{\sigma^2 + 4\tau^2} \\ \frac{350(10^6)}{1.5} &= \left[\left(\frac{77 \times 10^5}{d} \right)^2 + 4 \left(\frac{2547.77}{d^3} \right)^2 \right]^{\frac{1}{2}} \end{aligned}$$

or

$$5.444(10^{16}) = \frac{5.929(10^{13})}{d^2} + \frac{2.594(10^7)}{d^6}$$

Solving, by trial and error:

$$d = 0.0368 \text{ m} = 36.8 \text{ mm}$$



SOLUTION (4.10)

We have $\sigma_{all} = 90/1.2 = 75 \text{ MPa}$

(a)

$$\sigma_{all} = |\sigma_1 - \sigma_3| = 63.4 + 12.2 = 75.6 > 75 \quad \text{Failure occurs}$$



(b)

$$2\sigma_{all}^2 = (63.4 - 0.53)^2 + (0.53 + 12.2)^2 + (-12.2 - 63.4)^2$$

or

$$\sigma_{all} = 70 < 75 \quad \text{No failure}$$



SOLUTION (4.11)

(a) Using the torsion formula,

$$\tau = \frac{T(0.05)}{\pi(0.05)^4/2} = 5093T$$

$$\text{and } \sigma_1 = -\sigma_2 = 5093T$$

Equation (4.5a) yields then

$$[280(10^6)]^2 = (5093T)^2 + (5093T)(5093T) + (-5093T)^2$$

Solving,

$$T = 31.74 \text{ kN} \cdot \text{m}$$



(b) We now have

$$\sigma = \frac{400(10^3)\pi}{\pi(0.05)^2} = 160 \text{ MPa}$$

$$\tau = 5093T \quad (\text{as before})$$

Principal stresses are:

$$\begin{aligned}\sigma_{1,2} &= \underbrace{\frac{160(10^6)}{2}}_a \pm \underbrace{\frac{1}{2}[(160 \times 10^6)^2 + 4(5093T)^2]}_b^{\frac{1}{2}} \\ &= a \pm b\end{aligned}$$

With this notation, Eq. (4.5a) becomes

$$\sigma_{yp}^2 = (a + b)^2 - (a^2 - b^2) + (a - b)^2 = a^2 + 3b^2$$

Thus,

$$(280 \times 10^6)^2 = \left(\frac{160 \times 10^6}{2}\right)^2 + \frac{3}{4}[(160 \times 10^6)^2 + 4(5093T)^2]$$

Solving,

$$T = 26.05 \text{ kN} \cdot \text{m}$$



SOLUTION (4.12)

Maximum moment is

$$M = \frac{PL^2}{8} = \frac{6(1.5)^2}{8} = 1.688 \text{ kN} \cdot \text{m}$$

and hence

$$\sigma = \sigma_1 = \frac{My}{I} = \frac{1.688(0.125)10^3}{0.1(0.25)^3/12} = 1.62 \text{ MPa}$$

(CONT.)

4.12 (CONT.)

$$(a) \quad \frac{\sigma_{yp}}{n} = \sqrt{\sigma_1^2 - 0} = \sigma_1 \\ \frac{28}{n} = 1.62$$

from which

$$n = 17.3$$

$$(b) \quad |\sigma_1 - 0| = \frac{\sigma_{yp}}{n} \\ \text{or} \quad n = 17.3$$

SOLUTION (4.13)

Referring to Appendix B, we compute

$$\sigma_1 = 12.05 \text{ MPa} \quad \sigma_2 = -1.521 \text{ MPa} \quad \sigma_3 = -4.528 \text{ MPa}$$

Using Eq. (4.5a),

$$2\sigma_{yp}^2 = (12.05 + 1.521)^2 + (-1.521 + 4.528)^2 + (-4.528 - 12.05)^2 \\ = 468$$

Solving,

$$\sigma_{yp} = 15.3 \text{ MPa}$$

Hence,


$$\tau_{yp} = 15.3(0.577) = 8.828 \text{ MPa}$$

Therefore

$$\sigma_y = 2(\frac{9}{8.828}) = 2.039 \text{ MPa}$$

$$\sigma_x = 3(\frac{9}{8.828}) = 3.058 \text{ MPa}$$

SOLUTION (4.14)

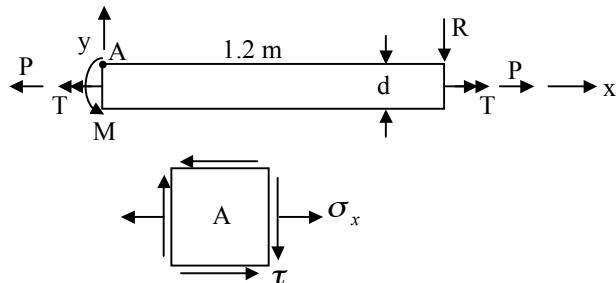

We have $P = 50R$, $T = 0.8R$, and $M = 1.2R$.

Stresses are

$$\sigma_b = \frac{32M}{\pi d^3} = \frac{32(1.2R)}{\pi(0.05)^3} = 97,784.8R$$

$$\tau = -\frac{16T}{\pi d^3} = \frac{-16(0.8R)}{\pi(0.05)^3} = -32,595R$$

$$\sigma_a = \frac{50R}{\pi(0.05)^2/4} = 25,464.8R$$

$$\sigma_x = \sigma_a + \sigma_b = 123,249.6R$$

(CONT.)

4.14 (CONT.)

(a) Equation (4.8a):

$$\frac{260(10^6)}{2} = R[(123,249.6)^2 + 4(-32,595)^2]^{\frac{1}{2}}$$

or $R = 932 \text{ N}$

(b) Equation (4.9a):

$$130 \times 10^6 = R[(123,249.6)^2 + 3(-32,595)^2]^{\frac{1}{2}}$$

or $R = 959 \text{ N}$

SOLUTION (4.15)

Referring to Appendix B,

$$\sigma_1 = 197.4 \text{ MPa} \quad \sigma_2 = -14.44 \text{ MPa} \quad \sigma_3 = -72.96 \text{ MPa}$$

Applying Eq. (4.4b):

$$2\sigma_{yp}^2 = (197.4 + 14.44)^2 + (-14.44 + 72.96)^2 + (-72.96 - 197.4)^2$$

or $\sigma_{yp} = 246.4 \text{ MPa}$

Hence,

$$\tau_{yp} = 346.4(0.577) = 142.2 \text{ MPa}$$

Thus,

$$\sigma_y = 40 \frac{140}{142.2} = 39.38 \text{ MPa}$$

$$\sigma_x = 50 \frac{140}{142.2} = 49.23 \text{ MPa}$$

SOLUTION (4.16)

Stresses are

$$\sigma_1 = \frac{pr}{t} = \frac{p(0.25)}{0.005} = 50p$$

$$\sigma_2 = \frac{pr}{2t} = 25p$$

(a) Applying Eq. (4.5a),

$$(50p)^2 - 1250p^2 + (25p)^2 = (280)^2$$

or $p = 6.466 \text{ MPa}$

(b) Using Eq. (4.2a),

$$|50p - 0| = 280$$

or

$$p = 5.6 \text{ MPa}$$

SOLUTION (4.17)

We have $(\sigma_{yp})_{all} = \frac{82}{1.2} = 68.33 \text{ MPa}$.

Referring to Appendix B:

$$\sigma_1 = 63.44 \text{ MPa} \quad \sigma_2 = 0.533 \text{ MPa} \quad \sigma_3 = -12.17 \text{ MPa}$$

(CONT.)

4.17 (CONT.)

(a) Using Eq. (4.1),

$$\sigma_{yp} = |63.44 + 12.17| = 75.6 > 68.33 : \quad \text{Failure occurs}$$

(b) Applying Eq. (4.4b)

$$2\sigma_{yp}^2 = (63.44 - 0.533)^2 + (0.533 + 12.17)^2 + (-12.17 - 63.44)^2$$

or $\sigma_{yp} = 70.13 > 68.33 : \quad \text{Failure occurs}$



SOLUTION (4.18)

Referring to Appendix B:

$$\sigma_1 = 162.4 \text{ MPa} \quad \sigma_2 = 46.15 \text{ MPa} \quad \sigma_3 = 1.468 \text{ MPa}$$

(a) Equation (4.1) yields

$$n = \frac{300}{162.4 - 1.468} = 1.86$$



(b) Equation (4.4b) gives

$$n^2 = \frac{2\sigma_{yp}^2}{(\sigma_1 - \sigma_2)^2 + (\sigma_2 - \sigma_3)^2 + (\sigma_3 - \sigma_1)^2} = \frac{2(300)^2}{(116.25)^2 + (44.682)^2 + (160.932)^2}$$

or $n = 2.09$



SOLUTION (4.19)

Referring to Appendix B:

$$\sigma_1 = 156.2 \text{ MPa} \quad \sigma_2 = 42.13 \text{ MPa} \quad \sigma_3 = 11.7 \text{ MPa}$$

(a) Equation (4.1) gives

$$n = \frac{220}{156.2 - 11.7} = 1.52$$



(b) Equation (4.4b) yields


$$n^2 = \frac{2\sigma_{yp}^2}{(\sigma_1 - \sigma_2)^2 + (\sigma_2 - \sigma_3)^2 + (\sigma_3 - \sigma_1)^2} = \frac{2(220)^2}{(114.07)^2 + (30.43)^2 + (-144.5)^2}$$

or

$$n = 1.67$$



SOLUTION (4.20)

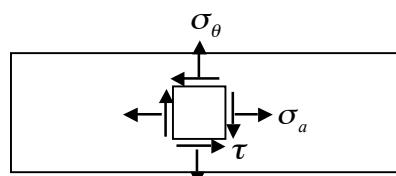

$$J \approx 2\pi r^3 t$$

$$\sigma_\theta = \frac{pr}{t} = \frac{5(10^6)(105)}{10} = 52.5 \text{ MPa}$$

$$\sigma_a = \frac{pr}{2t} = 26.25 \text{ MPa}$$

$$\tau = -\frac{Tc}{J} = -\frac{50 \times 10^3 (0.21)}{2\pi(0.105)^3 (0.01)} = -144.4 \text{ MPa}$$

$$\sigma_{1,2} = \frac{26.25 + 52.5}{2} \pm \sqrt{\left(\frac{26.25 - 52.5}{2}\right)^2 + (-144.4)^2} = 39.4 \pm 145$$

(CONT.)

4.20 (CONT.)

$$\sigma_1 = 184.4 \text{ MPa} \quad \sigma_2 = -105.6 \text{ MPa}$$

$$\text{Thus, } \sigma_1 = \frac{\sigma_u}{n}; \quad 184.4 = \frac{250}{n}, \quad n = 1.4$$




$$\text{and } \sigma_2 = \frac{\sigma_u'}{n}; \quad -105.6 = \frac{-520}{n}, \quad n = 4.9$$



SOLUTION (4.21)

$$\sum M_A = 0: \quad 150(2)(1) - R_B(1.2) = 0, \quad R_B = 250 \text{ kN}$$

$$\sum F_y = 0: \quad R_A = 50 \text{ kN}$$

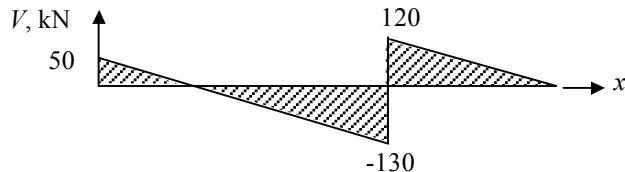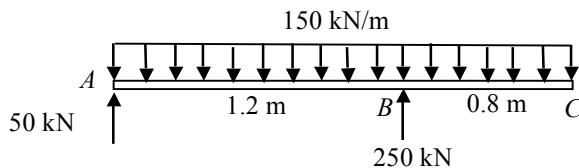

$$\tau_{\max} = \frac{3V}{2A} = \frac{3}{2} \frac{130 \times 10^3}{2b^2} = \frac{97.5 \times 10^3}{b^2}$$

$$\text{And } \tau_{\max} = \sigma_1 = -\sigma_2$$


Thus,

$$\tau_{\max} = \sigma_{all}; \quad \frac{97.5 \times 10^3}{b^2} = 120 \times 10^6, \quad b = 28.5 \text{ mm}$$

Use a 30 mm by 60 mm rectangular beam.



SOLUTION (4.22)

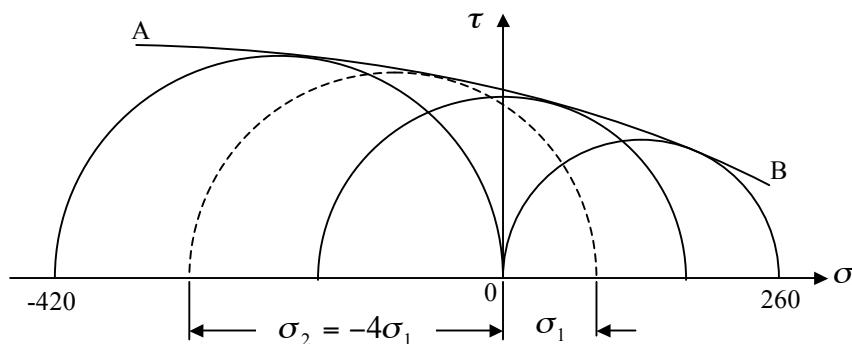

(CONT.)

4.22 (CONT.)

- (a) Upon following the procedure described in Sec. 4.11, Mohr's circle is constructed as shown in the sketch above.

The circle representing the given loading is then drawn by a trial and error procedure, as is indicated by the dashed lines. From the diagram, we measure the following values:

$$\sigma_1 = 77 \text{ MPa} \quad \sigma_2 = -308 \text{ MPa}$$

- (b) Applying Eq. (4.12a),

$$\frac{\sigma_1}{\sigma_u} - \frac{\sigma_2}{\sigma_u} = 1$$

or

$$\frac{\sigma_1}{260} - \frac{-4\sigma_1}{420} = 1$$

Solving,

$$\sigma_1 = 75 \text{ MPa} \quad \sigma_2 = -300 \text{ MPa}$$

SOLUTION (4.23)

Principal stresses are

$$\sigma_{1,2} = \frac{-180}{2} \pm \left[\left(\frac{180}{2} \right)^2 + 200^2 \right]^{\frac{1}{2}}$$

Or $\sigma_1 = 129.3 \text{ MPa}, \quad \sigma_2 = -309.3 \text{ MPa}$

- (a) Equation (4.11a):

$$|\sigma_1| < 290 \text{ MPa}$$

But since

$$|\sigma_2| > 290 \text{ MPa} : \quad \text{failure occurs}$$

- (b) Equation (4.12a):

$$\frac{129.3}{290} - \frac{-309.3}{650} = 1$$

gives $0.446 + 0.476 = 0.922 < 1$

Thus, no fracture

Note that Coulomb-Mohr theory is the most reliable when $\sigma_u' \gg \sigma_u$, as in this example.

SOLUTION (4.24)

$$\begin{aligned} \sigma_x &= \frac{pr}{2t} + \frac{P}{2\pi rt} \\ &= \frac{2.8(10^6)125}{2(5)} + \frac{45(10^3)}{2\pi(0.125)(0.005)} = 46.46 \text{ MPa} \end{aligned}$$

$$\sigma_y = \frac{pr}{t} = \frac{2.8(10^6)125}{5} = 70 \text{ MPa}$$

$$\tau = \frac{Tr}{2\pi r^3 t} = \frac{31.36(10^3)}{2\pi(0.125^2)(0.005)} = 63.89 \text{ MPa}$$

Thus,

$$\sigma_{1,2} = \frac{1}{2}(46.46 + 70) \pm \left[\frac{1}{4}(46.46 - 70)^2 + (63.89)^2 \right]^{\frac{1}{2}}$$

(CONT.)

4.24 (CONT.)

$$\text{or } \sigma_1 = 123.2 \text{ MPa} \quad \sigma_2 = -6.74 \text{ MPa}$$

(a) Equation (4.12a),

$$\frac{123.2}{210} - \frac{-6.74}{500} = 1$$

$$\text{gives } 0.587 + 0.013 = 0.6 < 1$$

Thus, no fracture ◀


(b) Equations (4.11a) shows

$$123.2 < 210, \quad \text{no fracture} \quad \text{◀}$$

$$6.14 < 210, \quad \text{no fracture} \quad \text{◀}$$

SOLUTION (4.25)

State of stress is represented by Mohr's circle shown below.

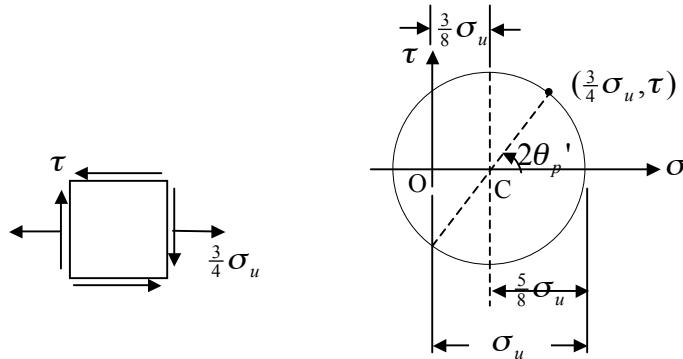


From the circle, we obtain

$$\tau = \sigma_u \sqrt{\left(\frac{5}{8}\right)^2 - \left(\frac{3}{8}\right)^2} = \frac{1}{2}\sigma_u$$

$$\text{and } \theta_p' = \frac{1}{2} \tan^{-1} \frac{1/2}{3/8} = 26.57^\circ \quad \text{◀}$$

Orientation of the fracture plane is shown below.

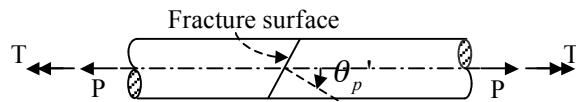

SOLUTION (4.26)

Principal stresses are

$$\sigma_{1,2} = \frac{1}{2}(200 + 20) \pm [(90)^2 + (150^2)]^{\frac{1}{2}}$$

or

$$\sigma_1 = 284.9 \text{ MPa} \quad \sigma_2 = -64.9 \text{ MPa}$$

(a) $284.9 = \frac{420}{n}, \quad n = 1.47$ ◀

$$64.9 = \frac{420}{n}, \quad n = 6.47$$

(CONT.)

4.26 (CONT.)


(b) Equation (4.12a): $\frac{284.9}{420} - \frac{-64.9}{900} = \frac{1}{n}$

Solving, $n = 1.33$



SOLUTION (4.27)

Uniform shear stress τ acts on a typical element as shown.

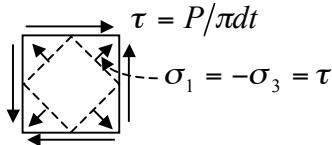

(a) $|\sigma_1| = \sigma_u \quad \text{or} \quad |\sigma_3| = \sigma_u$

$$\frac{P}{\pi d} = \sigma_u, \quad P = \pi t d \sigma_u$$



(b)

$$\frac{\sigma_1}{\sigma_u} - \frac{\sigma_3}{\sigma_u} = 1; \quad \tau(1 + \frac{\sigma_u}{\sigma_u}) = \sigma_u$$

or $P = \frac{t d \sigma_u}{(1 + \sigma_u / \sigma_u)}$



SOLUTION (4.28)

Table 4.3: $K_c = 23\sqrt{1000} \text{ MPa}\sqrt{mm} \quad \sigma_{yp} = 444 \text{ MPa}$

Note that the values of crack length a and plate thickness t satisfy Table 4.3.

Table 4.2: $\frac{a}{w} = \frac{25}{125} = 0.2 \quad \lambda = 1.37$

Equation (4.18), with $n=1$:

$$\sigma_{all} = \frac{K_c}{\lambda \sqrt{\pi a}} = \frac{23\sqrt{1000}}{(1.37)\sqrt{\pi(25)}} = 59.91 \text{ MPa}$$

Therefore

$$P_{all} = \sigma_{all}(wt) = 59.91(125 \times 25) = 187.2 \text{ kN}$$



Note, the nominal stress at fracture:

$$\sigma = \frac{P}{t(w-a)} = \frac{187.2(10^3)}{20(125-25)} = 93.6 \text{ MPa} < 444 \text{ MPa}$$

SOLUTION (4.29)

We have $a/w = 0.005/5 = 0.001$ and $\lambda = 1$ by Table 4.2. From Table 4.3:

$$K_c = 59 \text{ MPa}\sqrt{m} \quad \sigma_{yp} = 1503 \text{ ksi}$$

(a) $K = \lambda \sigma \sqrt{\pi a} = (1)(100)\sqrt{\pi(0.03)} = 30.7 \text{ MPa}\sqrt{m}$

$$n = \frac{K_c}{K} = \frac{59}{30.7} = 1.92$$



(b) Using Eq. (4.18) with $n = 1$:

$$\sigma = \frac{K_c}{\lambda \sqrt{\pi a}} = \frac{59}{(1)\sqrt{\pi(0.03)}} = 192.2 \text{ MPa}$$

This is well below the yield strength.

SOLUTION (4.30)

By Table 4.3: $K_c = 66\sqrt{1000} \text{ MPa}\sqrt{mm}$ and $\sigma_{yp} = 1149 \text{ MPa}$. Table 4.2:

$$\frac{a}{w} = \frac{10}{65} = 0.15 \quad \lambda = 1.02$$

We have

$$\sigma = \frac{K_c}{\lambda n \sqrt{\pi a}} = \frac{66\sqrt{1000}}{(1.02)(2.2)\sqrt{\pi}(10)} = 165.9 \text{ MPa}$$

Thus

$$t_{req} = \frac{P}{2w\sigma} = \frac{200(10^3)}{2(65)(165.9)} = 9.27 \text{ mm}$$

A thickness of 9.3 mm should be used. Note that both values of a and t satisfy Table 4.3.



SOLUTION (4.31)

Refer to Example 4.5. We now have $\frac{a}{w} = \frac{8}{40} = 0.2$.

Table 4.2: $\lambda_a = 1.37 \quad \lambda_b = 1.06$

Table 4.3: $K_c = 59\sqrt{1000} \text{ MPa}\sqrt{mm} \quad \sigma_{yp} = 1503 \text{ MPa}$

Equation (a) of Example 4.5, with $M = 0.17P$:

$$\lambda\sigma = (1.37) \frac{P}{(0.04)(0.01)} + 1.06 \frac{6(0.17P)}{(0.01)(0.04)^2} = 71,000P$$

By Eq. (4.18):

$$\lambda\sigma = \frac{K_c}{n\sqrt{\pi a}}; \quad 71,000P = \frac{59\sqrt{1000}(10^6)}{1.8\sqrt{\pi}(0.008)}$$

from which

$$P = 92.09 \text{ kN}$$



The nominal stress at fracture:

$$\begin{aligned} \sigma &= \frac{P}{t(w-a)} = \frac{92.09(10^3)}{(0.01)(0.04-0.008)} \\ &= 287.8 \text{ MPa} < 1503 \text{ MPa} \end{aligned}$$

SOLUTION (4.32)

From Table 4.3: $K_c = 23\sqrt{1000} \text{ MPa}\sqrt{mm}$ and $\sigma_{yp} = 444 \text{ MPa}$

Case B of Table 4.2: $a/w = 0.16, \lambda = 1.12$

By Eq.(4.18), with $n = 1$:

$$\sigma = \frac{K_c}{\lambda\sqrt{\pi a}} = \frac{23\sqrt{1000}}{1.12\sqrt{\pi}(24)} = 74.79 \text{ MPa}$$

It follows that

$$P = \sigma(wt) = 74.79(150 \times 30) = 337 \text{ kN}$$

Then

$$\begin{aligned} \sigma &= \frac{P}{(w-a)t} = \frac{337(10^3)}{(0.15-0.024)(0.03)} = 89.15 \text{ MPa} \\ &= 89.15 \text{ MPa} < \sigma_{yp} \end{aligned}$$



SOLUTION (4.33)

Case A of Table 4.2 and Table 4.3:

$$K_c = 59\sqrt{1000} \text{ MPa}\sqrt{mm} \quad \sigma_{yp} = 1503 \text{ MPa}$$

$$\lambda = 1.01 \quad (\text{assumed})$$

By Eq.(4.18):

$$\sigma = \frac{K_c}{n\lambda\sqrt{\pi a}} = \frac{59\sqrt{1000}}{(2)(1.01)\sqrt{\pi(6)}} = 213 \text{ MPa} < \sigma_{yp}$$

(a) $\sigma = \frac{p_f r}{t}, \quad p_f = \frac{\sigma t}{r} = \frac{213(10)}{30} = 71 \text{ MPa}$ ◀

(b) $\sigma = \frac{p_f r}{2t}, \quad p_f = \frac{1}{2}(71) = 35.5 \text{ MPa}$ ◀

SOLUTION (4.34)

Table 4.3: $K_c = 31 \text{ MPa}\sqrt{m} \quad \sigma_{yp} = 392 \text{ MPa}$

Case D of Table 4.2: $\frac{a}{w} = 0.4 \quad \therefore \lambda = 1.32$

Using Eq.(4.18) with $n = 1$ and $\sigma = 6M/tw^2$:

$$K_c = \lambda \frac{6M}{tw^2} \sqrt{\pi a}; \quad 31(10^6) = 1.32 \frac{6M}{0.03(0.12)^2} \sqrt{\pi(0.048)}$$

Solving

$$M = 4.35 \text{ kN}\cdot\text{m}$$
 ◀

SOLUTION (4.35)

$$\sigma_m = \frac{120(10^3)}{25(10^{-4})} = 48 \text{ MPa}$$

and $\frac{\sigma_a}{\sigma_{cr}} + \frac{\sigma_m}{\sigma_f} = 1; \quad \frac{1200F_A}{240(10^6)} + \frac{48(10^6)}{700(10^6)} = 1$

or $F_A = 186.3 \text{ kN}$ ◀

SOLUTION (4.36)

$$\sigma_{1a} - \sigma_{3a} = 15p - 0 = \sigma_{ea}$$

$$\sigma_{1m} - \sigma_{3m} = 9p - 0 = \sigma_{em}$$

Then,

$$\frac{15p}{250(10^6)} + \frac{9p}{300(10^6)} = 1$$

or

$$p = 11.11 \text{ MPa}$$
 ◀

SOLUTION (4.37)

We have

$$\sigma_{cr} = \frac{\sigma_a}{1 - (\sigma_m/\sigma_u)} \quad (a)$$

where,

$$\sigma_m = \frac{F_{max} + F_{min}}{2A}, \quad \sigma_a = \frac{F_{max} - F_{min}}{2A} \quad (b)$$

Substituting Eqs. (b) into (a):

$$\sigma_{cr} = \frac{(F_{max} - F_{min})/2A}{1 - [(F_{max} + F_{min})/2A\sigma_u]}$$

Solving,

$$A = \frac{1}{\sigma_{cr}} [F_{max} - \frac{1}{2}(F_{max} + F_{min})(1 - \frac{\sigma_{cr}}{\sigma_u})]$$



SOLUTION (4.38)

We have $\sigma_m = \sigma_a$. Using Table 4.4:

$$\frac{\sigma_m}{510/1.5} + \frac{\sigma_m}{1050/1.5} = 1$$

from which $\sigma_m = 228.8 \text{ MPa}$.

At the fixed end:

$$M_{max} = PL = 10(0.05) = 0.5 \text{ N}\cdot\text{m}$$

Hence,

$$M_{a,m} = \frac{(M_{max} \pm M_{min})}{2} = 0.25 \text{ N}\cdot\text{m}$$

and

$$\sigma_a = \sigma_m = \frac{6M_m}{bt^2} = \frac{6(0.25)}{0.005t^2} = \frac{300}{t^2} = 228.8(10^6)$$

Solving,

$$t = 1.145 \text{ mm}$$



SOLUTION (4.39)

We have $\sigma_a = \sigma_m$. From Table 4.4:

$$\frac{\sigma_m}{740/2.5} + \frac{\sigma_m}{1500/2.5} = 1$$

or

$$\sigma_m = 198.2 \text{ MPa.}$$

At the center of the beam:

$$M_{max} = PL/4 = (0.25)(20)(0.125) = 0.625 \text{ N}\cdot\text{m}$$

Hence,

$$M_{a,m} = \frac{(M_{max} \pm M_{min})}{2} = 0.3125 \text{ N}\cdot\text{m}$$

and

$$\sigma_a = \sigma_m = \frac{6M_m}{bt^2} = \frac{6(0.3125)}{0.01t^2} = \frac{187.5}{t^2} = 198.2(10^6)$$

Solving,

$$t = 0.973 \text{ mm}$$



SOLUTION (4.40)

$$\begin{aligned}\sigma_{\max} &= \sigma_{\min} = \frac{Mc}{I}, & \sigma_m &= \frac{4M}{\pi r^3}, & \sigma_a &= 0 \\ \tau_{\max} &= \frac{Tr}{J}, & \tau_{\min} &= 0, & \tau_m &= \tau_a = \frac{Tr}{\pi r^3}\end{aligned}$$

and

$$\sigma_x = \sigma, \quad \tau_{xy} = \tau, \quad \sigma_y = \sigma_z = \tau_{xz} = \tau_{yz} = 0$$

Equations (4.21) yield

$$\sqrt{0 + 3\tau_a^2} = \sigma_{ea}, \quad \sqrt{\sigma_m^2 + 3\tau_m^2} = \sigma_{em}$$

Then, Soderberg relation becomes

$$\sigma_{cr} = \frac{\sqrt{3}\tau_a}{1 - \frac{\sqrt{\sigma_m^2 + 3\tau_m^2}}{\sigma_{yp}}}$$

$$\text{or } \sigma_{cr} = \frac{\sigma_{cr}}{\sigma_{yp}} \sqrt{\sigma_m^2 + 3\tau_m^2} + \sqrt{3}\tau_a$$

or

$$\sigma_{cr} = \frac{\sigma_{cr}}{\sigma_{yp}} \left[\left(\frac{4M}{\pi r^3} \right)^2 + 3 \left(\frac{T}{\pi r^3} \right)^2 \right]^{\frac{1}{2}} + \frac{\sqrt{3}T}{\pi r^3}$$

Solving this expression for r , we obtain Eq. (P4.40).

SOLUTION (4.41)

$$\begin{aligned}\sigma_{1a,2a} &= \frac{\sigma_{xa} + \sigma_{ya}}{2} \pm \left[\left(\frac{\sigma_{xa} - \sigma_{ya}}{2} \right)^2 + \tau_{xya}^2 \right]^{\frac{1}{2}} \\ &= \frac{\sigma_{xa}}{2} \pm \left[\frac{\sigma_{xa}^2}{4} + \tau_{xya}^2 \right] \\ &= \frac{900}{2} \pm \left[\frac{81(10^4)}{4} + 4(10^4) \right]^{\frac{1}{2}}\end{aligned}$$

or

$$\sigma_{1a} = 942.44 \text{ MPa}, \quad \sigma_{2a} = -42.44 \text{ MPa}$$

Similarly,

$$\sigma_{1m} = 161.8 \text{ MPa}, \quad \sigma_{2m} = -61.8 \text{ MPa}$$

Thus,

$$\sigma_{ea} = \sigma_{1a} - \sigma_{2a} = 984.88 \text{ MPa}$$

$$\sigma_{em} = \sigma_{1m} + \sigma_{2m} = 233.6 \text{ MPa}$$

(a) Modified Goodman relation:

$$\sigma_{cr} = \frac{984.88}{1 - (223.6/2400)} = 1086 \text{ MPa}$$

$$b = \frac{\ln(0.9 \times 2400/800)}{\ln(10^3/10^8)} = -0.0863$$

$$N_{cr} = 10^3 \left(\frac{1086}{0.9 \times 2400} \right)^{-11.587} = 2.89(10^6) \text{ cycles}$$



(b) Soderberg criterion:

$$\sigma_{cr} = \frac{948.88}{1 - (223.6/1600)} = 1145 \text{ MPa}$$

$$N_{cr} = 10^3 \left(\frac{1145}{0.9 \times 2400} \right)^{-11.587} = 1.57(10^6) \text{ cycles}$$



(CONT.)

4.41 (CONT.)

(c) The SAE criterion:

$$\sigma_{cr} = 1086 \text{ MPa}, \quad b = -0.0596$$

$$N_{cr} = 1\left(\frac{1086}{2400}\right)^{-16.778} = 0.59(10^6) \text{ cycles}$$



(d) Gerber criterion:

$$\sigma_{cr} = \frac{948.88}{1-(223.6/2400)^2} = 993.51 \text{ MPa}$$

$$N_{cr} = 10^3\left(\frac{993.51}{0.9 \times 2400}\right)^{-11.587} = 8.12(10^6) \text{ cycles}$$



SOLUTION (4.42)

$$\sigma_{xa} = (800 + 600)/2 = 700 \text{ MPa}$$

$$\sigma_{xm} = (800 - 600)/2 = 100 \text{ MPa}$$

$$\sigma_{ya} = (500 + 300)/2 = 400 \text{ MPa}$$

$$\sigma_{ym} = (500 - 300)/2 = 100 \text{ MPa}$$

$$\tau_{xya} = (200 + 150)/2 = 175 \text{ MPa}$$

$$\tau_{xym} = (200 - 150)/2 = 25 \text{ MPa}$$

Equations (4.21) give then

$$2\sigma_{ea}^2 = (700 - 400)^2 + 400^2 + 700^2 + 6(175)^2$$

$$2\sigma_{em}^2 = (200 - 100)^2 + 100^2 + 100^2 + 6(25)^2$$

or $\sigma_{ea} = 679.61 \text{ MPa}, \quad \sigma_{em} = 108.97 \text{ MPa}$

(a) Modified Goodman criterion:

$$\sigma_{cr} = \frac{679.61}{1-(108.97/1600)} = 729.27 \text{ MPa}$$

$$b = \frac{\ln(0.9 \times 1600 / 0.5 \times 1600)}{\ln(10^3 / 10^8)} = -0.08509$$

$$N_{cr} = 10^3\left(\frac{729.27}{0.9 \times 1600}\right)^{-11.752} = 2.97(10^6) \text{ cycles}$$



(b) Soderberg criterion:

$$\sigma_{cr} = \frac{679.61}{1-(108.97/1000)} = 762.72 \text{ MPa}$$

$$N_{cr} = 10^3\left(\frac{762.72}{0.9 \times 1600}\right)^{-11.752} = 1.75(10^6) \text{ cycles}$$



SOLUTION (4.43)

$$\sigma_a = \frac{(M_{\max} - M_{\min})c}{2I}$$

$$\sigma_m = \frac{(M_{\max} + M_{\min})c}{2I}, \quad M = PL$$

Substituting these into Soderberg relation, we obtain

$$M_{\max} = \frac{2\sigma_{cr}I}{(1+\lambda)c} + \frac{1-\lambda}{1+\lambda} M_{\min}$$

(CONT.)

4.43 (CONT.)

where $\lambda = \frac{\sigma_{cr}}{\sigma_{yp}} = \frac{2}{3}$

$$\text{Thus, } P_{\max} = \frac{2\sigma_{cr}I}{c(1+\lambda)L} + \frac{1-\lambda}{1+\lambda} P_{\min} = \frac{2(200 \times 10^6)(0.05 \times 0.1^3)}{12(5/3)(0.05)(1.2)} + \frac{1/3}{5/3}(10,000) \\ = 16,667 + 2000 = 18.7 \text{ kN}$$



SOLUTION (4.44)

We have $W = mg = 80 \times 9.81 = 784.8 \text{ N}$

From Eq. (4.29);

$$\sigma_{\max} = (1 + \sqrt{1 + \frac{2h}{\delta_{st}}}) \frac{W}{A}$$

Solving, with $\delta_{st} = WL/AE$, we obtain

$$h = \frac{L\sigma_{\max}}{2EW} (A\sigma_{\max} - 2W) \quad (\text{a})$$

Substituting the given data:

$$h = \frac{(2)(350 \times 10^6)}{2(105 \times 10^9)(784.8)} (250 \times 350 - 1569.6) = 0.365 \text{ m}$$



SOLUTION (4.45)

Through the use of Eq. (4.29):

$$\sigma_{\max} = \frac{W}{A} \left[1 + \sqrt{1 + \frac{2h}{\delta_{st}}} \right], \quad \left[\frac{\sigma_{\max} A}{W} - 1 \right]^2 = 1 + 2h\delta_{st}$$

from which

$$\frac{\sigma_{\max}^2 A^2}{W^2} - \frac{2\sigma_{\max} A}{W} + 1 = 1 + \frac{2hAE}{WL}$$

Solving for W, we obtain Eq. (P4.45).

SOLUTION (4.46)

The kinetic energy is

$$E_k = \frac{W\omega^2 r^2}{2g} = \frac{1090(240 \times 2\pi/60)^2(0.35)^2}{2(9.81)} = 4300 \text{ N} \cdot \text{m}$$

$$\text{But } E_k = \frac{1}{2} T\phi \quad \text{where } T = \frac{GJ\phi}{L}$$

Thus,

$$\phi = \sqrt{2LE_k/GJ} \quad (\text{a})$$

Substituting the data given:

$$\phi = \left[\frac{2 \times 1.5(4300)2}{80.5(10^9)\pi(0.0625)^4} \right]^{\frac{1}{2}} = 0.08309 \text{ rad} = 4.76^\circ$$



Introducing

$$\phi = \frac{TL}{GJ} = \frac{\pi J}{r} \frac{L}{GJ} = \frac{\pi L}{rG}$$


into Eq. (a), we obtain

$$\tau = \sqrt{4GE_k/AL} \quad \text{where } A = \pi c^2$$

Substituting the numerical values,

$$\tau = \left[\frac{4(80.5 \times 10^9)4300}{\pi(0.0625)^4(1.5)} \right]^{\frac{1}{2}} = 274.3 \text{ MPa}$$

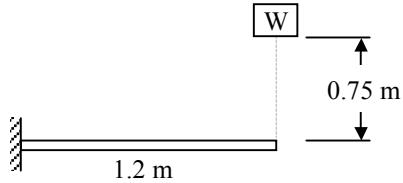

SOLUTION (4.47)

We have $\sigma_{yp} = Mc/I = PLc/I$

from which

$$P = \frac{\sigma_{yp}I}{Lc} = \frac{280(10^6)(0.05^4/12)}{1.2(0.025)} = 4.86 \text{ kN}$$

End deflection is

$$\delta_{max} = \frac{4860(1.2)^3(12)}{3(200 \times 10^9)(0.05)^4} = 26.86 \text{ mm}$$

But

$$W(0.75 + 0.02686) = \frac{1}{2}(4860)(0.02686)$$

Solving,


$$W = 84.02 \text{ N}$$



End of Chapter 4

CHAPTER 5

SOLUTION (5.1)

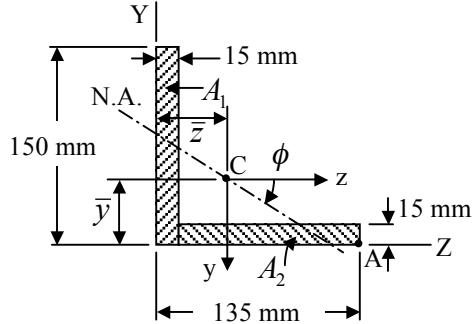

$$\bar{z} = \frac{A_1 z_1 + A_2 z_2}{A_1 + A_2} = \frac{(150 \times 15)7.5 + (135 \times 15)[15 + (135/2)]}{150 \times 15 + 135 \times 15}$$

or $\bar{z} = \bar{y} = 43 \text{ mm}$

Then,

$$I_y = \frac{1}{12}(150)(15)^3 + (150 \times 15)(35.5)^2 + \frac{1}{12}(15)(135)^3 + (135 \times 15)(39.5)^2$$

or $I_y = I_z = 9.11(10^6) \text{ mm}^4$

$$I_{yz} = (150 \times 15)(-32)(-35.5) + (135 \times 15)(35.5)(39.5) = 5.4(10^6) \text{ mm}^4$$

We have the moment components:

$$M_y = 0, \quad M_z = -11.25(0.9) = -10.125 \text{ kN} \cdot \text{m}$$

Thus,

$$(\sigma_x)_A = \frac{-10125(5.4)(0.107) + 10125(9.11)(0.043)}{[(9.11)^2 - (5.4)^2](10^{-6})} = -35 \text{ MPa}$$


Equation (5.15) gives

$$\tan \phi = \frac{5.4}{9.11} = 0.593$$

or

$$\phi = 30.66^\circ$$

SOLUTION (5.2)

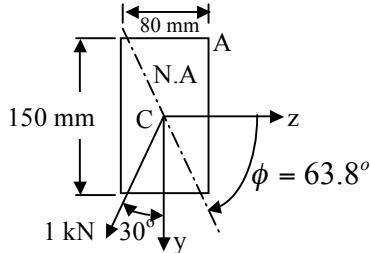

$$I_y = \frac{1}{12}hb^3 = \frac{1}{12}(150)(80)^3 = 6.4 \times 10^6 \text{ mm}^4$$

(CONT.)

5.2 (CONT.)

$$I_z = \frac{1}{12}bh^3 = \frac{1}{12}(80)(150)^3 = 22.5 \times 10^6 \text{ mm}^4$$

$$M_y = (P \sin \alpha)L = 600 \text{ N} \cdot \text{m}$$

$$M_z = (P \cos \alpha)L = 1,039.2 \text{ N} \cdot \text{m}$$

$$y_d = -75 \text{ mm} \quad z_d = 40 \text{ mm}$$

(a) Equation (5.15) with $I_{yz} = 0$:

$$\tan \phi = \frac{I_z}{I_y} \frac{M_y}{M_z} = \frac{I_z}{I_y} \tan \alpha \quad \therefore \phi = 63.8^\circ$$

(b) Thus, maximum tensile stress is at point A.

Equation (5.16) gives

$$\sigma_{\max} = \frac{600(0.04)}{22.5 \times 10^{-6}} - \frac{1,039.2(-0.075)}{6.4 \times 10^{-6}} = 13.25 \text{ MPa}$$

SOLUTION (5.3)

$$I_y = \frac{1}{12}hb^3 = \frac{1}{12}(40)(100)^3 = 3.33 \times 10^6 \text{ mm}^4$$

$$I_z = \frac{1}{12}bh^3 = \frac{1}{12}(100)(40)^3 = 0.533 \times 10^6 \text{ mm}^4$$


$$M_y = M_o \cos \alpha = 800(\cos 25^\circ) = 725 \text{ N} \cdot \text{m}$$

$$M_z = M_o \sin \alpha = 800(\sin 25^\circ) = 338.1 \text{ N} \cdot \text{m}$$

(a) Equation (5.15) with $I_{yz} = 0$:

$$\tan \phi = \frac{I_z}{I_y} \frac{M_y}{M_z} = \frac{I_z}{I_y} \cot \alpha \quad \therefore \phi = 18.9^\circ$$

(b) There, maximum compressive stress is at A.

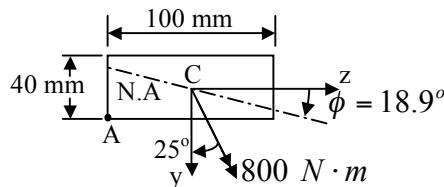

Equation (5.16) results in

$$\sigma_{\max} = \frac{725(-0.05)}{3.33(10^{-6})} - \frac{338.1(0.02)}{0.533(10^{-6})} = -23.57 \text{ MPa}$$

SOLUTION (5.4)

$$I_y = 2\left[\frac{30 \times 8^3}{12} + 240 \times 34^2\right] + \frac{8 \times 76^3}{12} = 85(10^4) \text{ mm}^4$$

$$I_z = 2\left[\frac{30 \times 8^3}{12} + 240 \times 19^2\right] + \frac{76 \times 8^3}{12} = 21.2(10^4) \text{ mm}^4$$

$$I_{yz} = [0 + 240(19)(-34)] + [0 + 240(-19)(34)] + 0 = -31(10^4) \text{ mm}^4$$

Using Eq. (5.14):


$$M_o[21.2 + 1.5(-31)]z = M_o[-31 + 1.5 \times 85]y$$

(CONT.)

5.4 (CONT.)

or $z = -3.81y$

Thus, point A is the farthest from the N.A., as shown.

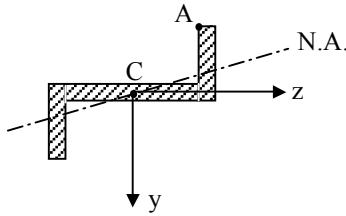

Hence, Eq. (5.13) gives

$$(\sigma_x)_A = 80(10^6) = \frac{[21.2+1.5(-31)]0.03 - [-31+1.5(85)](-0.034)}{[85 \times 21.2 - (-31)^2]10^{-8}} M_o$$

from which

$$M_o = 266.8 \text{ N} \cdot \text{m}$$



SOLUTION (5.5)

Bending moment at the midspan is

$$M_z = -24(4) - 24(2) = -48 \text{ kN} \cdot \text{m}$$

From Fig. 5.4 and Example 5.1:

$$z_E = 0.105 \text{ m} \quad z_D = 0$$

$$y_E = -0.045 \text{ m} \quad y_D = -0.045 \text{ m}$$

$$I_y = I_z = 11.596(10^{-6}) \text{ m}^4$$

$$I_{yz} = -6.79(10^{-6}) \text{ m}^4$$

Then, Eq. (5.13) with $M = 0$:

$$(\sigma_x)_D = \frac{0 - (-48000)(11.596)(-0.045)}{[(11.596)^2 - (6.79)^2]10^{-6}} = -283.4 \text{ MPa}$$




Similarly,

$$(\sigma_x)_E = \frac{-48000[-6.79(0.105) - 11.596(-0.045)]}{[(11.596)^2 - (6.79)^2]10^{-6}} = 103.8 \text{ MPa}$$



SOLUTION (5.6)

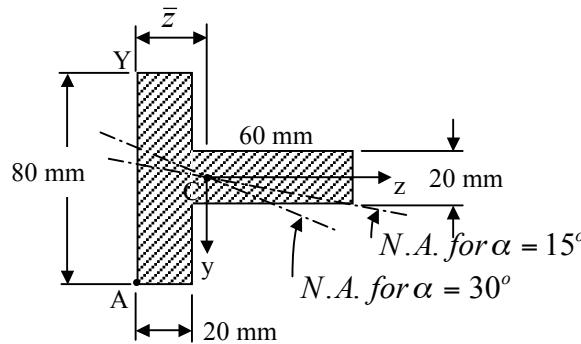

Y

(CONT.)

5.6 (CONT.)

$$\begin{aligned}\bar{z} &= \frac{80 \times 20(10) + 60 \times 20(50)}{80 \times 20 + 60 \times 20} = 27.14 \text{ mm} \\ I_y &= \frac{80 \times 20^3}{12} + 20 \times 80(17.14)^2 + \frac{20 \times 60^3}{12} + 20 \times 60(22.86)^2 \\ &= 15.1048(10^5) \text{ mm}^4 \\ I_z &= \frac{80 \times 20^3}{12} + 2\left[\frac{20 \times 30^3}{12} + 20 \times 30(25)^2\right] = 8.933(10^5) \text{ mm}^4\end{aligned}$$

Due to the symmetry $I_{yz} = 0$.

(a) We have

$$\alpha = 0^\circ \quad M_y = 0 \quad M_z = 1.5P$$

Equation (5.13) is thus,

$$\frac{290(10^6)}{1.2} = \frac{1.5Py}{I_z} = \frac{1.5P(0.04)}{8.933(10^{-7})}$$

or $P = 3.6 \text{ kN}$



(b) Now we have $\alpha = 15^\circ$ and

$$M_z = 1.5P \cos 15^\circ = 1.4489P$$

$$M_y = 1.5P \sin 15^\circ = 0.3882P$$

Equation (5.14):

$$0.3882P(8.933)z = 1.4489P(15.1048)y$$

from which

$$z = 6.3105y$$

The farthest point from the N.A. is A. Equation (5.13):

$$(\sigma_x)_A = \frac{290(10^6)}{1.2} = \frac{0.3882P(8.933)(-0.02714) - 1.4489P(15.1048)0.04}{8.933(15.1048)10^{-7}}$$



Solving, $P = 3.36 \text{ kN}$

SOLUTION (5.7)

Given $\alpha = 30^\circ$ and

$$M_z = 1.5P \cos 30^\circ = 1.299P$$

$$M_y = 1.5P \sin 30^\circ = 0.75P$$

The area properties are already found in Solution of Prob. 5.6.

Equation (5.14) gives

$$0.75P(8.933)z = 1.299P(15.1048)y$$

or $z = 2.9287y$


As before, the maximum stress occurs at A. Equation (5.13):

$$(\sigma_x)_A = \frac{290(10^6)}{1.2} = \frac{0.75P(8.933)(-0.02714) - 1.299P(15.1048)0.04}{8.933(15.1048)10^{-7}}$$

Solving,

$$P = 3.37 \text{ kN}$$



SOLUTION (5.8)


We have $M_y = 0$ and $M_z = PL$

Equation (5.14) becomes

$$I_{yz}z = I_yy \quad \text{or} \quad -th^3z = \frac{2}{3}th^3y$$

or

$$y = -\frac{3z}{2}$$

Point A is the farthest from the N.A. Thus, with

$$y_A = -h - \frac{t}{2} \quad \text{and} \quad z_A = -\frac{t}{2}$$


Equation (5.13) yields

$$(\sigma_x)_A = \frac{PL[-th^3(-t/2)-(2th^3/3)h^3(-h-t/2)]}{(2th^3/3)(8th^3/3)-(-th^3)^2}$$

or

$$(\sigma_x)_A = \frac{3PL(2.5t+2h)}{7th^3} = \sigma_{\max}$$

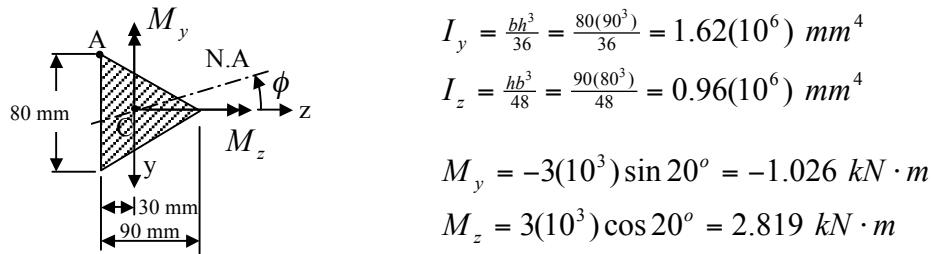

SOLUTION (5.9)


(a) Equation (5.15):

$$\phi = \tan^{-1} \left[\frac{0.96}{1.62} \tan(-20^\circ) \right] = -12.17^\circ$$

(b) Point A is the farthest from the N.A. Equation (5.16):

$$\sigma_A = \frac{-1026(-0.03)}{1.62(10^{-6})} - \frac{2819(-0.04)}{0.96(10^{-6})} = 136.5 \text{ MPa}$$



SOLUTION (5.10)

$$(a) \sigma_x = \frac{\partial^2 \Phi}{\partial y^2} = -c_4xy - \frac{2}{3}c_5x^3y - c_6xy^3$$

$$\sigma_y = \frac{\partial^2 \Phi}{\partial x^2} = c_2x - c_3xy - \frac{2}{3}c_5xy^3$$

$$\tau_{xy} = -\frac{\partial^2 \Phi}{\partial x \partial y} = c_1 + \frac{c_3}{2}x^2 + \frac{c_4}{2}y^2 + c_5x^2y^2 + \frac{c_6}{4}y^4$$

(CONT.)

5.10 (CONT.)

$$\text{and } \frac{\partial^4 \Phi}{\partial x^4} = 0, \quad \frac{\partial^4 \Phi}{\partial y^4} = -6c_6 xy, \quad \frac{\partial^4 \Phi}{\partial x^2 \partial y^2} = -4c_5 xy$$

$$\text{Thus, } \nabla^4 \Phi = 6c_6 xy + 8c_5 xy = 0$$

or

$$6c_6 + 8c_5 = 0 \quad (\text{a})$$

$$\text{At } y = h/2 : \sigma_y = 0 :$$

$$c_2 - \frac{c_3 h}{2} - \frac{c_5 h^3}{12} = 0 \quad (\text{b})$$

$$\text{At } y = -h/2 : \sigma_y = -px/Lt :$$

$$(c_2 + c_3 y - \frac{2c_5 y^3}{3})x = -\frac{px}{Lt}$$

or

$$c_2 + \frac{c_3 h}{2} + \frac{c_5 h^3}{12} = -\frac{p}{Lt} \quad (\text{c})$$

Adding Eqs. (b) and (c),

$$c_2 = -\frac{p}{2Lt}$$

Substituting this into Eq. (b):

$$\frac{c_3 h}{2} + \frac{c_5 h^3}{12} = -\frac{p}{2Lt} \quad (\text{d})$$

$$\text{On } y = \pm \frac{h}{2}, \tau_{xy} = 0 :$$

$$-c_1 - \frac{c_3}{2} x^2 - \frac{c_4}{8} h^2 - \frac{c_5}{4} h^2 x^2 - \frac{c_6}{64} h^4 = 0$$

or

$$\left(\frac{c_3}{2} + \frac{c_5 h^2}{4}\right)x^2 + (c_1 + \frac{c_4 h^2}{8} + \frac{c_6 h^4}{64}) = 0 \quad (\text{e})$$

This is of form $A \cdot B + C = 0$, where A, B, C are independent. Thus,

$$\frac{c_3}{2} + \frac{c_5 h^2}{4} = 0 \quad (\text{f})$$

$$c_1 + \frac{c_4 h^2}{8} + \frac{c_6 h^4}{64} = 0 \quad (\text{g})$$

Multiply Eq. (f) by h and subtract it from Eq. (d) to find

$$c_5 = -\frac{3p}{Lt}$$

Then, Eqs. (g) and (a) give

$$c_3 = \frac{3p}{2hL}, \quad c_6 = \frac{4p}{th^3 L}$$

$$\text{On } x = 0 : V = 0 :$$

$$\int_{-\frac{h}{2}}^{\frac{h}{2}} \tau_{xy} t dy = \int_{-\frac{h}{2}}^{\frac{h}{2}} \left(-c_1 - \frac{c_4 y^2}{2} - \frac{c_6 y^4}{4}\right) t dy = 0$$

$$\text{or } c_1 + c_4 \left(\frac{h^2}{24}\right) + c_6 \left(\frac{h^4}{320}\right) = 0 \quad (\text{h})$$

Subtracting Eq. (h) from (g), together with the value of c_6 already obtained, we have

$$c_4 = -\frac{3p}{5hL}$$

Finally, substitute c_4 and c_6 into Eq. (g) to determine

$$c_1 = \frac{ph}{80tL}$$

(CONT.)

5.10 (CONT.)

The stress function is thus,

$$\Phi = \frac{p}{Lt} \left[\frac{h}{80} xy - \frac{x^3}{12} - \frac{x^3 y}{4h} + \frac{xy^3}{10h} + \frac{x^3 y^3}{h^3} - \frac{xy^5}{5h^3} \right]$$

and the stresses are

$$\begin{aligned}\sigma_x &= \frac{p}{Lt} \left[\frac{3}{5h} xy + \frac{2}{h^3} x^3 y - \frac{4}{h^3} xy^3 \right] \\ \sigma_y &= \frac{p}{Lt} \left[-\frac{x}{2} - \frac{3}{2h} xy + \frac{2}{h^3} xy^3 \right] \\ \tau_{xy} &= \frac{p}{Lt} \left[\frac{h}{80} - \frac{3x^2}{4h} + \frac{3y^2}{10h} + \frac{3x^2 y^3}{h^3} - \frac{y^4}{h^3} \right]\end{aligned}$$

(b) $\sigma_x = \frac{Mc}{I} = \frac{(px^2/6L)(h/2)}{th^3/12} = \frac{px^2}{Lth^2}$

(c) The maximum stresses are

$$\begin{aligned}(\sigma_x)_{elast.} &= \frac{p}{10th} \left[6y + 2000y - \frac{40y^3}{h^2} \right] \\ (\sigma_x)_{elem.} &= \frac{p(10h)^3}{10h^3 t} = 100 \left(\frac{p}{t} \right) \\ (\sigma_x)_{elast.} &= 99.8 \left(\frac{p}{t} \right) \quad \text{at } y = \pm \frac{h}{2}\end{aligned}$$

Thus,

$$(\sigma_x)_{elast.} = 0.998(\sigma_x)_{elem.}$$

SOLUTION (5.11)

(a) We can show that given Φ satisfies $\nabla^4 \Phi = 0$. From Eqs. (3.13):

$$\sigma_x = \frac{p}{0.43} \left\{ 2[0.78 - \tan^{-1} \frac{y}{x}] - \frac{2xy}{x^2+y^2} \right\} \quad (a)$$

$$\sigma_y = \frac{p}{0.43} \left\{ 2[0.78 - \tan^{-1} \frac{y}{x}] - 2 + \frac{2xy}{x^2+y^2} \right\} \quad (b)$$

$$\tau_{xy} = -\frac{p}{0.43} \frac{2y^2}{x^2+y^2} \quad (c)$$

To test which stress is maximum we rewrite σ_y in the form:

$$\begin{aligned}\sigma_y &= \frac{p}{0.43} \left\{ 2[0.78 - \tan^{-1} \frac{y}{x}] - \frac{2(x^2+y^2)}{x^2+y^2} + \frac{2xy}{x^2+y^2} \right\} \\ &= \frac{p}{0.43} \left\{ 2[0.78 - \tan^{-1} \frac{y}{x}] - \frac{2xy}{x^2+y^2} - \frac{2(x-y)^2}{x^2+y^2} \right\}\end{aligned}$$

Comparing this with Eq. (a), noting $2(x-y)^2/(x^2+y^2) > 0$, we conclude that $\sigma_x > \sigma_y$.

When $y = 0$, Eqs. (a) to (c) yield $\sigma_x = 3.63p$, $\sigma_y = -p/0.43$, $\tau_{xy} = -p/0.43$

Maximum stress occurs at $y = 0$:

$$\sigma_{x,\max} = 3.63(2) = 7.26 \text{ MPa}$$

(b) $(\sigma_x)_{elem.} = \frac{Mc}{I} = \frac{\frac{1}{2}px^2(\frac{x}{2})}{x^3/3} = 3p = 6 \text{ MPa}$

Thus,

$$(\sigma_x)_{elast.} = 1.21(\sigma_x)_{elem.}$$

SOLUTION (5.12)

$$\frac{\sigma_{bottom}}{\sigma_{top}} = \frac{c_1}{c_2} = 3$$

and $c_1 = 22.5 \text{ mm}$


$$c_2 = 67.5 \text{ mm}$$

Thus

$$\begin{aligned}\bar{y} &= c_1 = \frac{\sum A_i y_i}{\sum A_i} \\ &= \frac{(15)(90)(45) + (b-15)(15)(7.5)}{(15)(90) + (b-15)(15)} = 22.5 \text{ mm} \\ &= \frac{60,750 + (b-15)(112.5)}{1,350 + (b-15)(15)} = 22.5 \text{ mm}\end{aligned}$$

Solving,


$$b = 150 \text{ mm}$$

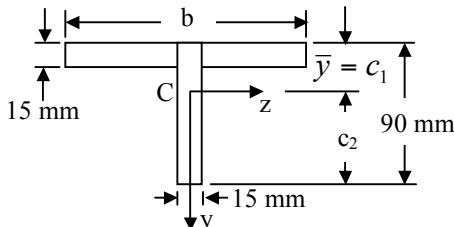

SOLUTION (5.13)

$$\tau_{max} = \frac{VQ}{Ib} = \frac{pL}{2} \frac{(th/2)(h/4)}{(th^3/12)t} = \frac{3}{4} \frac{pL}{ht}$$

$$\sigma_{max} = \frac{Mc}{I} = \frac{pL^2}{8} \frac{h/2}{th^3/12} = \frac{3}{4} \frac{pL^2}{th^2}$$

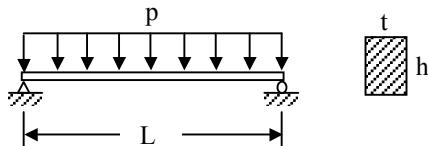

Thus,


$$\frac{\sigma_{max}}{\tau_{max}} = \frac{L}{h}$$

from which

$$L = \frac{\sigma_{max}h}{\tau_{max}} = \frac{8.4(0.15)}{0.7} = 1.8 \text{ m}$$

Then,

$$\begin{aligned}p &= \frac{4}{3} \frac{\tau_{max}(th)}{L} = \frac{4}{3} \frac{700(0.05 \times 0.15)}{1.8} \\ &= 3.88 \text{ kN} \cdot \text{m}\end{aligned}$$

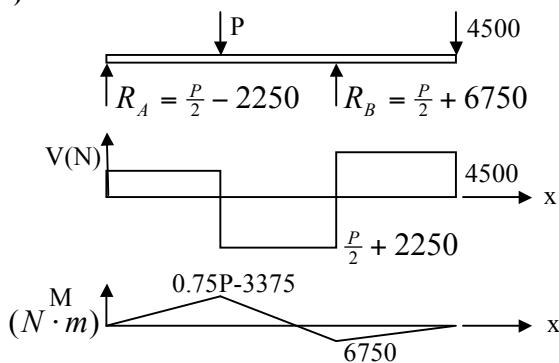SOLUTION (5.14)


(CONT.)

5.14 (CONT.)

We have

$$I = \frac{0.2(0.25)^3}{12} - \frac{0.15(0.2)^3}{12} = 160.417(10^{-6}) \text{ } m^4$$

Then, $\tau = \frac{VQ}{Ib} = 0.7(10^6)$

$$= \frac{(P/2) + 2250}{160.417 \times 10^{-6} (0.05)} (0.2 \times 0.025 \times 0.1125 + 0.1 \times 0.05 \times 0.05)(2)$$

Solving,

$$P = 9.32 \text{ kN}$$

Similarly,

$$\sigma = \frac{Mc}{I} = 7(10^6) = \frac{(0.75P - 3375)(0.125)}{160.417 \times 10^{-6}}$$

or $P = 16.478 \text{ kN}$

Thus, $P_{all} = 9.32 \text{ kN}$



SOLUTION (5.15)

$$\sigma_{all} = 150 \text{ MPa}$$

and

$$\begin{aligned} I_z &= \frac{bh^3}{12} - \frac{1}{12}(b-2t)(h-2t)^3 \\ &= \frac{1}{12}(120)(170)^3 - \frac{1}{12}(100)(150)^3 \\ &= 21.005(10^6) \text{ mm}^4 \end{aligned}$$


(a) Therefore

$$\sigma_{all} = \frac{Mc}{I_z},$$

or $M = \frac{I}{c}\sigma_{all} = \frac{21.005(10^6)}{0.085} 150(10^6) = 37.1 \text{ kN} \cdot \text{m}$

(b) $\frac{1}{r_x} = \frac{M}{EI} = \frac{37,100}{(70 \times 10^9)(21.005)(10^{-6})} = 0.0252$

$$r_x = 39.68 \text{ m}$$

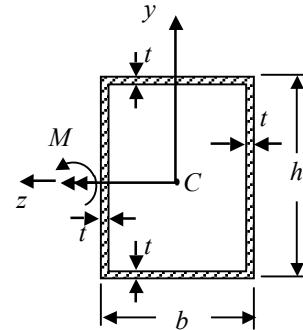

SOLUTION (5.16)

$$I = \frac{1}{64}(D^4 - d^4) = \frac{\pi}{64}(60^4 - 40^4) = 510.509(10^3) \text{ mm}^4$$

(a) $y_A = 30 \text{ mm} = 0.03 \text{ m}$

$$\sigma_A = \frac{My_A}{I} = \frac{(600)(0.03)}{510.509(10^{-9})} = 35.3 \text{ MPa}$$

(CONT.)

5.16 (CONT.)


$$(b) \quad y_B = 20 \text{ mm} = 0.02 \text{ m}$$

$$\sigma_B = \frac{My_B}{I} = \frac{(600)(0.02)}{510.509(10^{-9})} = 23.5 \text{ MPa}$$

$$(c) \quad \frac{1}{r_x} = \frac{M}{EI}$$

$$= \frac{600}{70(10^9)(510.509 \times 10^{-9})} \\ = 0.0168$$

$$r_x = 59.56 \text{ m}$$

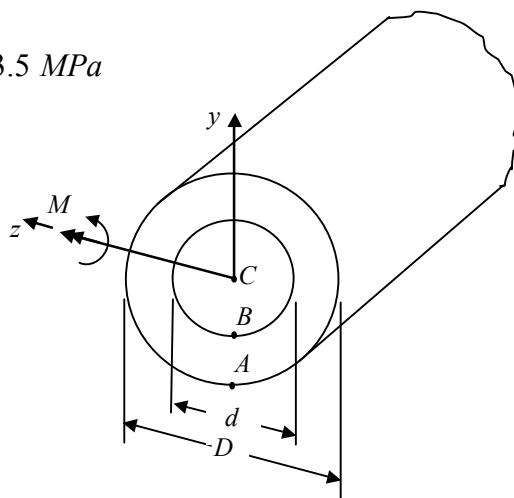

Hence,

$$r_z = -\frac{r_x}{\nu} = -\frac{59.56}{0.29} = -205.48 \text{ m}$$


SOLUTION (5.17)

$$\bar{y} = \frac{\sum A_i \bar{y}_i}{\sum A_i} = \frac{2A_1 \bar{y} + A_2 \bar{y}_2}{2A_1 + A_2} \\ = \frac{2(150 \times 25)(75) + (350 \times 25)(137.5)}{2(150 \times 25) + (350 \times 25)} \\ = 108.65 \text{ mm}$$

So $c_1 = 108.65 \text{ mm}$ and $c_2 = 41.35 \text{ mm}$

$$I_z = 2[\frac{1}{12}(25)(150)^3 + (25 \times 150)(33.65)^2] + \\ \frac{1}{12}(350)(25)^3 + (350 \times 25)(28.85)^2 = 30.29(10^6) \text{ mm}^4$$

$$M_z = M = \frac{1}{2}PL = \frac{1}{2}P(2.4) = 1.2P$$

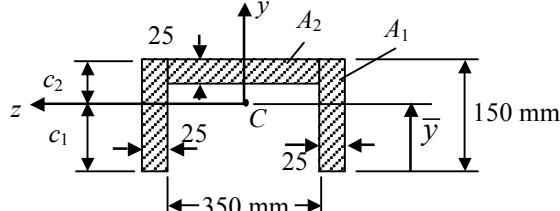

Therefore

$$\sigma_t = \frac{Mc_1}{I_z}; \quad 60(10^6) = \frac{1.2P(0.10865)}{30.29(10^{-6})}, \quad P = 14.4 \text{ MPa}$$

$$\sigma_c = \frac{Mc_2}{I_z}; \quad 60(10^6) = \frac{1.2P(0.04153)}{30.29(10^{-6})}, \quad P = 36.6 \text{ kN}$$

$$\text{Hence } P_{all} = 14.4 \text{ kN}$$



SOLUTION (5.18)

$$M_{\max} = \frac{1}{8} pL^2 = \frac{1}{8}(12)(3)^2 = 13.5 \text{ kN}\cdot\text{m}$$

$$I = \frac{1}{12}(80)(120)^3 = 11.52 \times 10^6 \text{ mm}^4$$

$$\sigma_{\text{nom}} = \frac{Mc}{I} = \frac{13.5 \times 10^3 (45 \times 10^{-3})}{11.52 \times 10^{-6}} = 52.7 \text{ MPa}$$

$$K = \frac{\sigma_{\text{all}}}{\sigma_{\text{nom}}} = \frac{95}{52.7} = 1.8$$



$$\text{Use Fig. D.3. For } K = 1.8, \quad \frac{D}{d} = \frac{120}{90} = 1.33 :$$

$$\frac{r}{d} = 0.14$$

Thus,

$$r_{\min} = 0.14(90) = 12.6 \text{ mm}$$

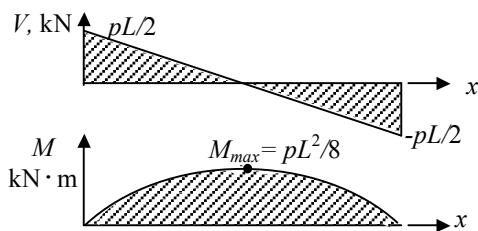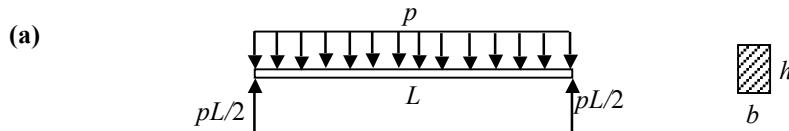

SOLUTION (5.19)


$$\tau_{\max} = \frac{3V}{2A} = \frac{3}{2} \frac{pL/2}{bh} = \frac{3}{4} \frac{pL}{bh} \quad (1)$$

$$\sigma_{\max} = \frac{Mc}{I} = \frac{pL^2/8(h/2)}{bh^3/12} = \frac{3}{4} \frac{pL^2}{bh^2} \quad (2)$$

Thus,

$$\tau_{\max} / \sigma_{\max} = h/L \quad (3)$$



For example, if $L = 10h$, the above ratio is 1/10.

(b) From Eq. (3), we have:

$$L = h \frac{\sigma_{\text{all}}}{\tau_{\text{all}}} = 0.16 \left(\frac{9}{1.4} \right) = 1.029 \text{ m}$$



(CONT.)


5.19 (CONT.)

Equation (1) gives then

$$p_{all} = \frac{4}{3} \frac{bh}{L} \tau_{all} = \frac{4}{3} \frac{0.05 \times 0.16}{1.029} (1.4 \times 10^6) = 10.34 \text{ kN/m}$$




SOLUTION (5.20)

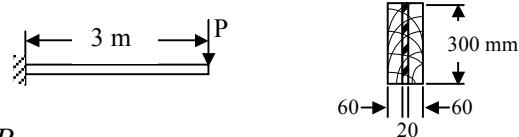

$$M = 3P$$

$$n = E_s/E_t = 20$$

$$I_t = \frac{(520)(300)^3}{12} = 1170(10^6) \text{ mm}^4$$

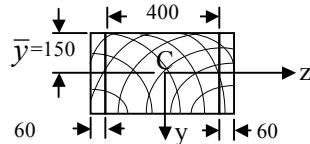

The allowable stress in the transformed section is

$$\frac{12}{20} = 6 \text{ MPa} < 7 \text{ MPa}$$

Thus, the stress in the steel is the controlling stress. Hence,



$$M_{max} = 3P_{max} = \frac{\sigma_{max} I_t}{c}$$

$$= \frac{6(10^6)1170(10^{-6})}{(0.15)}$$

$$\text{or } P_{max} = 15.6 \text{ kN}$$




SOLUTION (5.21)

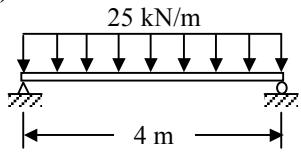

$$M_{max} = \frac{pL^2}{8} = \frac{25 \times 10^3 (4)^2}{8} = 50 \text{ kN} \cdot \text{m}$$

$$I_t = \frac{1}{12}(180)(300)^3 + 2\left[\frac{1260(10^3)}{12} + (1260)(10)(155)^2\right] = 1010.64(10^6) \text{ mm}^4$$

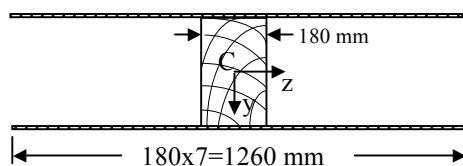

$$\sigma_{w,max} = \frac{Mc}{I_t} = \frac{50 \times 10^3 (0.15)}{1010.64(10^{-6})} = 7.4 \text{ MPa}$$

$$\sigma_{a,max} = \frac{7Mc}{I_t} = \frac{7 \times 50 \times 10^3 (0.16)}{1010.64(10^{-6})} = 55.4 \text{ MPa}$$



SOLUTION (5.22)

Equation (5.54) becomes

$$(kd)^2 + (kd)\left(\frac{20}{300}\right)(1200) - \left(\frac{20}{300}\right)(500)(1200) = 0$$

or $(kd)^2 + 180kd - 40(10^3) = 0$

Solving,

$$kd = 164 \text{ mm}$$

Hence,

$$500 - kd = 336 \text{ mm}$$

From Eqs. (e) of Example 5.5:

$$\begin{aligned} M_c &= \frac{1}{2}\sigma_c(bkd)(d - \frac{kd}{3}) \\ &= \frac{1}{2}(12 \times 10^6)(0.3 \times 0.164)(0.5 - \frac{0.164}{3}) \\ &= 89.5 \text{ kN} \cdot \text{m} \end{aligned}$$

and $M_s = \sigma_s A_s (d - \frac{kd}{3})$


$$\begin{aligned} &= 150(10^6)(1200 \times 10^{-6})(0.445) \\ &= 81.9 \text{ kN} \cdot \text{m} \end{aligned}$$

Thus,

$$M_{all} = 81.9 \text{ MPa}$$



SOLUTION (5.23)

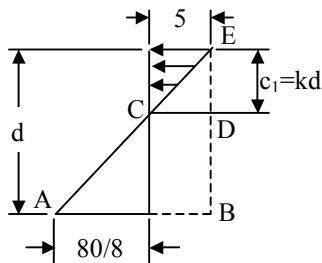

The stresses in concrete and the equivalent of the steel (Fig. 514b) have the values shown in the preceding figure. From the similarity of $\triangle ECD$ and $\triangle EAB$ we find

$$\frac{c_1}{d} = \frac{5}{(80/8)+5} = \frac{5}{15}$$

or

$$c_1 = \frac{5d}{15} = \frac{5}{3}d$$

Equation (d) of Example 5.5:

$$\frac{1}{2}\sigma_c(c_1 b) = \sigma_s A_s$$

$$\frac{1}{2}(5)\left(\frac{500}{3}\right)300 = 80A_s$$

or $A_s = 1563 \text{ mm}^2$



Then, we have from Eq. (e) of Example 5.5,

$$\begin{aligned} M &= \sigma_s A_s (d - \frac{c_1}{3}) \\ &= 80(10^6)(1563 \times 10^{-6})(0.5 - \frac{0.5}{9}) \\ &= 55.6 \text{ kN} \cdot \text{m} \end{aligned}$$



SOLUTION (5.24)

The shearing stress at a distance s is given by

$$\begin{aligned}\tau &= \frac{V_y Q_z}{I_z b} = \frac{V_y}{I_z} \int_0^\alpha R \cos \theta (t R d\theta) \\ &= \frac{2V_y}{\pi R t} \sin \alpha\end{aligned}$$

This shows that $\tau = 0$ at the free ends and τ_{\max} at the neutral axis, same as for a rectangular section. The shearing stress produces the following twisting moment about O:

$$\begin{aligned}T &= \int \tau R dA = \int_0^\pi \frac{2V_y \sin \alpha}{\pi R t} R (R t d\alpha) \\ &= \frac{4RV_y}{\pi}\end{aligned}$$

By applying the principle of moment at O: $V_y e = M$. Thus,

$$e = \frac{4R}{\pi}$$
◀

SOLUTION (5.25)

Shearing stress in the web is neglected. Moment of the forces about S:

$$V_1 e_1 = V_2 e_2; \quad \frac{e_1}{e_2} = \frac{V_2}{V_1} \quad (a)$$

Let M_1 and M_2 be bending moments on flanges 1 and 2, respectively.

Curvature-moment are related by

$$\frac{1}{r_1} = \frac{M_1}{EI_1}, \quad \frac{1}{r_2} = \frac{M_2}{EI_2} \quad (b)$$

By assuming $r_1 = r_2$, we have

$$\frac{M_1}{EI_1} = \frac{M_2}{EI_2}; \quad \frac{dM_1}{I_1} = \frac{dM_2}{I_2}$$

Introducing $dM/dx = -V$, Eq. (c) gives

$$\frac{V_1}{V_2} = \frac{I_1}{I_2}$$

Equation (a) now becomes

$$\frac{e_1}{e_2} = \frac{I_2}{I_1}$$

Since $e_1 + e_2 = h$; $\left[\frac{e_1}{(h-e_1)} \right] = \frac{I_2}{I_1}$

Thus,

$$e_1 = \frac{I_2 h}{(I_1 + I_2)}$$
◀

where

$$I_1 = \frac{b_1^3 t_1}{12} \quad I_2 = \frac{b_2^3 t_2}{12}$$


SOLUTION (5.26)


Fig. (a)

Location of centroid C (Fig. a):

$$\bar{z} = \frac{15.5 \times 75(-37.5) + 0 + 9.5 \times 125(62.5)}{15.5 \times 75 + 9.5 \times 250 + 9.5 \times 125} = 6.481 \text{ mm}$$

$$\bar{y} = \frac{15.5 \times 75(-250) + 0 + 9.5 \times 125(-125)}{15.5 \times 75 + 9.5 \times 250 + 9.5 \times 125} = -124.339 \text{ mm}$$

Moment of inertia:

$$\begin{aligned} I_y &= \frac{1}{12}(15.5)(75)^3 + (15.5 \times 75)(43.98)^2 \\ &\quad + \frac{1}{12}(250)(9.5)^3 + 250(9.5)(6.48)^2 \\ &\quad + \frac{1}{12}(9.5)(125)^3 + 9.5(125)(56.01)^2 \\ &= 8.18(10^6) \text{ mm}^4 \end{aligned}$$

$$\begin{aligned} I_z &= \frac{1}{12}(75)(15.5)^3 + (75 \times 15.5)(125.6)^2 \\ &\quad + \frac{1}{12}(9.5)(250)^3 + (9.5 \times 250)(0.65)^2 \\ &\quad + \frac{1}{12}(125)(9.5)^3 + (125 \times 9.5)(124.3)^2 \\ &= 49.10(10^6) \text{ mm}^4 \end{aligned}$$

$$\begin{aligned} I_{yz} &= (15.5 \times 75)(-125)(-43.98) \\ &\quad + (9.5 \times 250)(-0.65)(-6.48) \\ &\quad + (9.5 \times 125)(124.3)(56) \\ &= 14.70(10^6) \text{ mm}^4 \end{aligned}$$

$$\theta_p = \frac{1}{2} \tan^{-1} \left[-\frac{2(14.7)}{8.18 - 49.1} \right] = 17.85^\circ$$

Then,

$$I_{y'} = 10^6 \left[\frac{8.18+49.1}{2} + \frac{8.18-49.1}{2} \cos 35.7^\circ - 14.7 \sin 35.7^\circ \right] = 3.45(10^6) \text{ mm}^4$$

Similarly, we compute

$$I_1 = I_{z'} = 53.85(10^6) \text{ mm}^4$$

$$I_2 = I_{y'} = 3.45(10^6) \text{ mm}^4$$

From geometry of section (Fig. b):

$$HB = 144.57 \text{ mm} \quad BC = 39.05 \text{ mm}$$

Thus,

$$\tau_{xz} = \frac{V_{y'}}{I_{z'} t} = [st(0.1445 - \frac{s}{2} \sin 17.85^\circ)]$$

(CONT.)

5.26 (CONT.)

Shear force due to $V_{y'}$ (Fig. b):

$$F_1 = \int_0^s \tau_{xz} t ds = \frac{V_{y'}(0.0155)}{54.1 \times 10^{-6}} \int_0^{0.075} [0.1445s - \frac{s^2}{2} \sin 17.85^\circ] ds = 0.1108V_{y'}$$

We write

$$V_{y'} \cdot e_{z'} = 0.25F_1 = 0.25(0.1108V_{y'})$$

or $e_{z'} = 0.0277 \text{ m} = 27.7 \text{ mm}$



Shear force due to $V_{z'}$. Now assume that the direction of F_1 shown in the figure is reversed. Then,

$$\begin{aligned} F_1 &= \frac{V_{z'}t}{I_{y'}} \int_0^{0.075} [0.03905s - \frac{s^2}{2} \cos 17.85^\circ] ds \\ &= 0.1928V_{z'}, \end{aligned}$$

We write

$$V_{z'} \cdot e_{y'} = 0.25(0.1928V_{z'})$$

or

$$e_{y'} = 0.0482 \text{ m} = 48.2 \text{ mm}$$


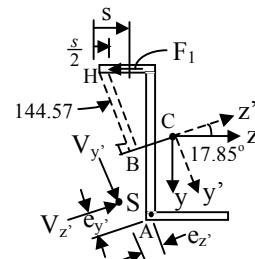


Figure (b)

SOLUTION (5.27)

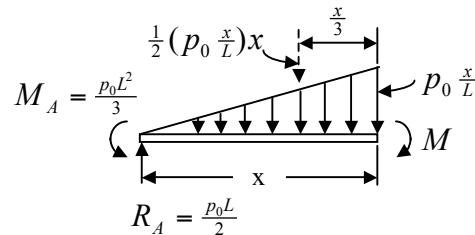

We have $EIv' = M = \frac{1}{6}p_0x^3 - \frac{1}{2}p_0Lx + \frac{1}{3}p_0L^2$

Integrating

$$EIv' = \frac{p_0}{24L}x^4 - \frac{p_0L}{4}x^2 + \frac{p_0L^2}{3}x + c_1$$

$$v'(0) = 0; \quad c_1 = 0.$$

$$EIv' = \frac{p_0}{24L}x^4 - \frac{p_0L}{4}x^2 + \frac{p_0L^2}{3}x \quad (\text{a})$$

Integrating

$$EIv = \frac{p_0}{120EI}x^5 - \frac{p_0L}{12}x^3 + \frac{p_0L^2}{6}x^2 + c_2$$

$$v(0) = 0; \quad c_2 = 0.$$

$$(a) \quad v = \frac{p_0}{120EI}(x^5 - 10L^2x^3 + 20L^3x^2)$$

$$(b) \quad \text{Let } x=L \text{ in this equation: } v_B = \frac{11p_0L^4}{120EI}$$

$$(c) \quad \text{Let } x=L \text{ in Eq. (a): } \theta_B = \frac{p_0L^3}{8EI}$$



SOLUTION (5.28)

$$\begin{aligned}
 EIv'''' &= p & EIv''' &= px + c_1 \\
 EIv'' &= \frac{1}{2}px^2 + c_1x + c_2 \\
 EIv' &= \frac{1}{6}px^3 + \frac{1}{2}c_1x^2 + c_2x + c_3 \\
 EIv &= \frac{1}{24}px^4 + \frac{1}{6}c_1x^3 + \frac{1}{2}c_2x^2 + c_3x + c_4
 \end{aligned}$$

Boundary conditions:

$$\begin{aligned}
 EIv(0) &= 0; & c_4 &= 0 \\
 EIv''(0) &= 0; & c_2 &= 0 \\
 EIv(L) &= 0; & \frac{pL^3}{24} + \frac{c_1L^2}{6} + c_3 &= 0 \\
 EIv'(L) &= -EI \frac{pL^3}{96EI} = \frac{pL^3}{6} + \frac{c_1L^2}{2} + c_3
 \end{aligned} \tag{a}$$


or

$$c_3 = -\frac{17pL^3}{96} - \frac{c_1L^2}{2} \tag{b}$$

Substituting Eq. (b) into (a), we obtain reaction at right end:

$$c_1 = -\frac{13pL}{32} = R$$

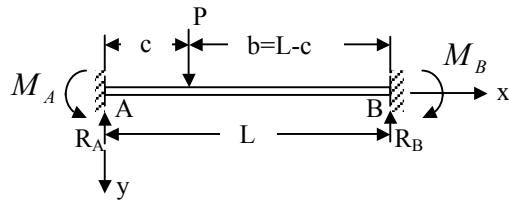

SOLUTION (5.29)


Segment AD:

$$\begin{aligned}
 EIv_1'' &= M_A - R_Ax & EIv_1' &= M_Ax - \frac{1}{2}R_Ax^2 + c_1 \\
 EIv_1 &= \frac{1}{2}M_Ax^2 - \frac{1}{6}R_Ax^3 + c_1x + c_2
 \end{aligned} \tag{a}$$

Segment BD:

$$\begin{aligned}
 EIv_2'' &= M_A - R_Ax + P(x - c) \\
 EIv_2' &= M_Ax - \frac{1}{2}R_Ax^2 + \frac{1}{2}P(x - c)^2 + c_3 \\
 EIv_2 &= \frac{1}{2}M_Ax^2 - \frac{1}{6}R_Ax^3 + \frac{1}{6}P(x - c)^3 + c_3x + c_4
 \end{aligned} \tag{b}$$

Boundary conditions:

$$\begin{aligned}
 v_1(0) &= 0; & c_2 &= 0 \\
 v_1'(0) &= 0; & c_1 &= 0
 \end{aligned}$$

(CONT.)

5.29 (CONT.)

$$\begin{aligned}v_1(c) &= v_2(c); \quad c_3c + c_4 = 0 \\v_1'(c) &= v_2'(c); \quad c_3 = 0, \quad c_4 = 0\end{aligned}$$

and

$$v_2'(L) = 0 = M_A L - \frac{1}{2} R_A L^2 + \frac{1}{2} P b^2 \quad (\text{c})$$

$$v_2(L) = 0 = \frac{1}{2} M_A L^2 - \frac{1}{6} R_A L^3 + \frac{1}{6} P b^3 \quad (\text{d})$$

Solving Eqs.(c) and (d),

$$R_A = \frac{P b^3}{L^3} (3c + b) = \frac{P(L-c)^2}{L^3} (2c + L)$$

Substituting of this into Eq. (c) gives

$$M_A = \frac{P c b^2}{L^2} = \frac{P c (L-c)^2}{L^2}$$

Thus, introducing the values of M_A , R_A , and $c_1 = c_2 = c_3 = c_4 = 0$ into Eqs. (a) and (b) we obtain the deflections.


For $0 \leq x \leq c$:

$$v_1 = \frac{P(L-c)^2 x^2}{6EI L^3} (3cL - 2cx - Lx)$$

For $c \leq x \leq L$:

$$v_2 = \frac{P(L-c)^2 x^2}{6EI L^3} (3cL - 2cx - Lx) + \frac{P}{6EI} (x - c)^3$$

SOLUTION (5.30)

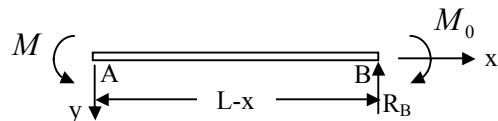

The reactions are statically indeterminate. We have

$$EIv'' = M = R_B x - R_B L + M_0$$

$$EIv' = \frac{1}{2} R_B x^2 - R_B L x + M_0 x + c_1$$

$$v'(0) = 0; \quad c_1 = 0.$$

$$EIv = \frac{1}{6} R_B x^3 - \frac{1}{2} R_B L x^2 + \frac{1}{2} M_0 x^2 + c_2$$

$$v(0) = 0; \quad c_2 = 0$$

$$v(L) = 0; \quad R_B = \frac{3M_0}{2L}$$

The preceding equation gives

$$v = \frac{M_0 x^2 (x-L)}{4EI L}$$

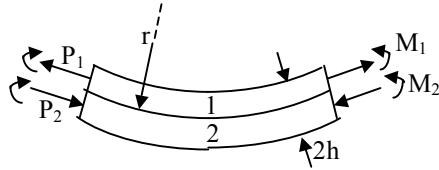
SOLUTION (5.31)


Fig. (a) Bent beam

(a) Static equilibrium gives

$$P_1 = P_2 = P \quad M_1 + M_2 = Ph$$

Equation (5.9):

$$M_1 = \frac{E_1 I_1}{r} \quad M_2 = \frac{E_2 I_2}{r}$$

Interface strains must be the same:

$$\underbrace{\alpha_1 \Delta T}_{\substack{\text{due to} \\ \text{temp.} \\ \text{increase}}} + \underbrace{\frac{P_1}{E_1 h}}_{\substack{\text{due to} \\ \text{axial} \\ \text{force}}} + \underbrace{\frac{h/2}{r}}_{\substack{\text{due to} \\ \text{bending} \\ (\text{from Eq. 5.9})}} = \alpha_2 \Delta T - \frac{P_2}{E_2 h} - \frac{h/2}{r}$$

This yields an expression for the interface curvature:

$$\frac{1}{r} = \frac{12(\alpha_2 - \alpha_1)\Delta T}{h(14+n+1/n)} \quad \text{where } n = E_1/E_2.$$



(b) At the interface

$$\sigma_1 = \frac{P}{h} + \frac{E_1 h}{2r} = (\sigma_{yp})_1$$

$$\sigma_2 = -\frac{P}{h} - \frac{E_2 h}{2r} = -(\sigma_{yp})_2$$



(c) Summing these equations.

$$(\sigma_{yp})_1 - (\sigma_{yp})_2 = -\frac{h(E_1 - E_2)}{2r}$$

It follows that

$$\frac{(\sigma_{yp})_1 - (\sigma_{yp})_2}{E_1 - E_2} = \frac{h}{2} \frac{24(\alpha_2 - \alpha_1)\Delta T}{h(14+n+1/n)}$$


from which

$$\Delta T = \frac{14+n+1/n}{6(\alpha_2 - \alpha_1)} \frac{(\sigma_{yp})_1 - (\sigma_{yp})_2}{E_1 - E_2}$$



SOLUTION (5.32)

Case B

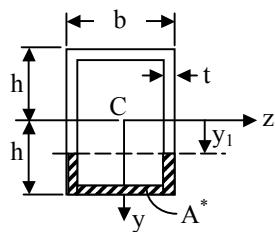

$$\begin{aligned} Q &= Q_{\text{outside}} - Q_{\text{inside}} \\ &= \frac{b}{2}(h^2 - y_1^2) - \frac{b-2t}{2}[(h-t)^2 - y_1^2] \\ &= bht - \frac{1}{2}bt^2 + th^2 + t^3 - ty_1^2 \end{aligned}$$

(CONT.)

5.32 (CONT.)

$$\alpha = \frac{A}{I^2} \int \frac{Q}{(width)^2} dA$$

$$= \frac{A}{I^2} \left\{ 2 \left[\int_0^{h-t} \frac{(bht+th^2 - \frac{bt^2}{2} - 2ht^2 + t^3 - ty_1^2)^2}{b^2} 2tdy_1 + \int_{h-t}^h \frac{(bht - \frac{bt^2}{2} + th^2 - 2ht^2 + t^3 - ty_1^2)^2}{b^2} bdy_1 \right] \right\}$$


or $\alpha = \frac{A}{A_{web}} = 1 + \frac{b}{2(h-t)}$

where

$$A = 2bh - (b-2t)(2h-2t) = 2bt + 4th - 4t^2$$

$$A_{web} = 2(2h-2t)t = 4ht - 4t^2$$

$$I = \frac{2}{3}bh^3 - \frac{2}{3}(b-2t)(h-t)^3$$

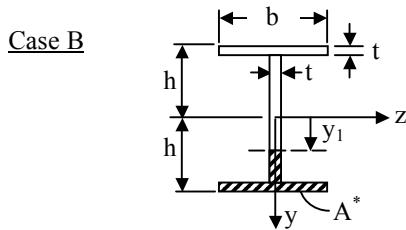

$$Q = (h-t-y_1)t[y_1 + \frac{1}{2}(h-t-y_1)]$$

$$= \frac{th^2}{2} - ht^2 + \frac{t^3}{2} + bht - \frac{bt^2}{2} - \frac{t}{2}y_1^2$$

$$\alpha = \frac{A}{I^2} \left\{ 2 \left[\int_0^{h-t} \frac{(bht+ht^2 - \frac{bh^2}{2} - \frac{bt^2}{2} - \frac{by_1^2}{2} + \frac{t^3}{2})^2}{t^2} tdy_1 + \int_{h-t}^h \frac{(bht+ht^2 + \frac{bh^2}{2} - \frac{bt^2}{2} - \frac{ty_1^2}{2} + \frac{t^3}{2})^2}{b^2} bdy_1 \right] \right\}$$

or $\alpha = \frac{A}{A_{web}} = 1 + \frac{b}{h-t}$

where

$$A = 2bt + (2h-2t)t = 2bt + 2th - 2t^2$$


$$A_{web} = (2h-2t)t = 2ht - 2t^2$$

$$I = \frac{1}{12}t(2h-2t)^3 + 2[\frac{1}{12}bt^3 + bt(h-\frac{t}{2})^2]$$



Note: For thin-walled sections flange and web thicknesses are small with compared with to unity and their products are neglected.

Case C

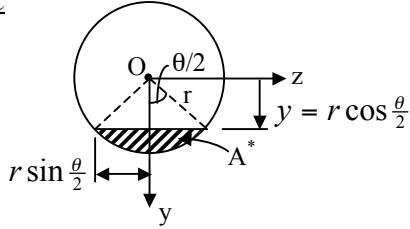

(CONT.)

5.32 (CONT.)

We write $A = \frac{r^2}{2}(\theta - \sin \theta)$ = area of segment

$$dA = \frac{r^2}{2}(1 - \cos \theta)d\theta = r^2(1 - \cos^2 \frac{\theta}{2})d\theta$$

$$\begin{aligned} Q &= \int_{A^*} y dA = \int_{A^*} (r \cos \frac{\theta}{2}) r^2 (1 - \cos^2 \frac{\theta}{2}) d\theta \\ &= r^3 \int_0^\theta (\cos \frac{\theta}{2} - \cos^3 \frac{\theta}{2}) d\theta = r^3 [2 \sin \frac{\theta}{2} - \frac{2}{3} \sin \frac{\theta}{2} (\cos^2 \frac{\theta}{2} + 2)] \\ &= \frac{2}{3} r^3 [\sin \frac{\theta}{2} - \sin \frac{\theta}{2} \cos^2 \frac{\theta}{2}] \end{aligned}$$


$$\begin{aligned} \alpha &= \frac{A}{I^2} \int \frac{\underline{Q}^2}{(\text{width})^2} dA \\ &= \frac{A}{I^2} \int_0^{2\pi} \frac{[\frac{2\pi r^3}{3} (\sin \frac{\theta}{2} - \sin \frac{\theta}{2} \cos^2 \frac{\theta}{2})]}{(2r \sin \frac{\theta}{2})^2} r^2 (1 - \cos^2 \frac{\theta}{2}) d\theta \end{aligned}$$

$$\text{Since, } A = \pi r^2 \quad I^2 = \frac{\pi^2 r^8}{16}$$

We have, after simplification:

$$\alpha = \frac{16}{\pi r^6} \int_0^{2\pi} \left(\frac{r^6}{9} \right) (1 - \cos^2 \frac{\theta}{2})^3 d\theta = \frac{10}{9}$$

Case D



$$Q = Q_2 - Q_1$$

$$= \frac{2}{3} r_2^2 [\sin \frac{\theta}{2} - \sin \frac{\theta}{2} \cos^2 \frac{\theta}{2}] - \frac{2}{3} r_1^2 [\sin \frac{\phi}{2} - \sin \frac{\phi}{2} \cos^2 \frac{\phi}{2}]$$

$$\alpha = \frac{A}{I^2} \left[\int_0^{2\pi} \frac{\underline{Q}_2^2}{(2r_2 \sin \frac{\theta}{2})^2} r_2^2 (1 - \cos^2 \frac{\theta}{2}) d\theta - \int_0^{2\pi} \frac{\underline{Q}_1^2}{(2r_1 \sin \frac{\phi}{2})^2} r_1^2 (1 - \cos^2 \frac{\phi}{2}) d\phi \right]$$

Letting

$$A = \pi(r_2^2 - r_1^2), \quad I^2 = \frac{\pi^2}{16}(r_2^4 - r_1^4)$$

after integration, we obtain

$$\alpha = 2$$

SOLUTION (5.33)

Since stress is symmetrical, Eq. (3.40) reduces to


$$\left(\frac{\partial^2}{\partial r^2} + \frac{1}{r} \frac{\partial}{\partial r} \right) \left(\frac{\partial^2 \Phi}{\partial r^2} + \frac{1}{r} \frac{\partial \Phi}{\partial r} \right) = \frac{\partial^4 \Phi}{\partial r^4} + \frac{2}{r} \frac{\partial^3 \Phi}{\partial r^3} - \frac{1}{r^2} \frac{\partial^2 \Phi}{\partial r^2} + \frac{1}{r^3} \frac{\partial \Phi}{\partial r} = 0$$

The given Φ satisfies this equation. Equations (3.32) lead to

$$\sigma_r = \frac{1}{r} \frac{\partial \Phi}{\partial r} = \frac{A}{r^2} + B(1 + 2 \cdot \ln r) + 2C$$

$$\sigma_\theta = \frac{\partial^2 \Phi}{\partial r^2} = \left(-\frac{A}{r^2} \right) + B(3 + 2 \cdot \ln r) + 2C$$

The constants A, B, and C are determined from the boundary conditions (b) and (d) of Sec. 5.13. In so doing, we arrive at the solution given by Eq. (5.67).

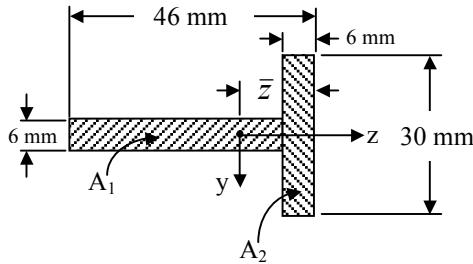SOLUTION (5.34)


$$\bar{z} = \frac{(A_1 z_1 + A_2 z_2)}{(A_1 + A_2)} = 16.14 \text{ mm}$$

We have

$$\bar{r} = 136.14 \text{ mm} \quad r_i = 120 \text{ mm} \quad r_o = 166 \text{ mm}$$

$$R = \frac{A}{\sum \int \frac{dr}{r}} = \frac{420}{\int_{120}^{126} \frac{30dr}{r} + \int_{126}^{166} \frac{6dr}{r}} = 134.7045 \text{ mm}, \quad e = \bar{r} - R = 1.4355 \text{ mm}$$

$$\text{We have } M = -(30 + 120 + 16.14)P = -166.14P$$

Outer Edge. Applying Eq. (5.73),

$$-80 \frac{N}{mm^2} = \frac{P}{420} + \frac{166.14P(134.7045-166)}{420(1.4355)(166)}$$

or $P = 1.614 \text{ kN} = P_{all}$

Inner Edge. Using Eq. (5.73),

$$80 \frac{N}{mm^2} = \frac{P}{420} + \frac{166.14P(134.7045-126)}{420(1.4355)(126)}$$

Solving,

$$P = 3.73 \text{ kN}$$

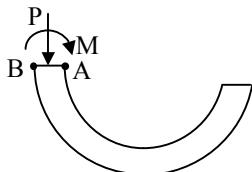
SOLUTION (5.35)


Figure (a)

(a) Equation (5.66) yields

$$N = \left(1 - \frac{0.1^2}{0.2^2}\right)^2 - 4 \frac{0.1^2}{0.2^2} \ln^2 \frac{0.1}{0.2} = 0.082$$

$$M = PR = 70(10^3) \times 0.15 = 10.5 \text{ kN} \cdot \text{m}$$

Thus, from Eq. (5.67):

$$\begin{aligned} (\sigma_\theta)_A &= \frac{4(10,500)}{0.05(0.2)^2(0.082)} \left[\left(1 - \frac{0.1^2}{0.2^2}\right) (1 + \ln 1) - (1 + 1) \ln \frac{0.2}{0.1} \right] \\ &= 163 \text{ MPa} \end{aligned}$$

$$\begin{aligned} (\sigma_\theta)_B &= \frac{4(10,500)}{0.05(0.2)^2(0.082)} \left[\left(1 - \frac{0.1^2}{0.2^2}\right) (1 + \ln 2) - \left(1 + \frac{0.1^2}{0.2^2}\right) \ln 2 \right] \\ &= 103 \text{ MPa} \end{aligned}$$

(CONT.)

5.35 (CONT.)

Referring to Fig. (a),

$$\sigma_{\max} = (\sigma_{\theta})_A - \frac{P}{A} = -163 - \frac{70}{5} = -177 \text{ MPa}$$

$$\sigma_{\min} = (\sigma_{\theta})_B - \frac{P}{A} = 103 - 14 = 89 \text{ MPa}$$

(b) We have

$$r_i = 100 \text{ mm}, \quad r_o = 200 \text{ mm}, \quad R = 100/\ln 2 = 144.2695$$

$$A = 5000 \text{ mm}^2, \quad e = 5.7305$$

Thus,

$$(\sigma_{\theta})_A = -\frac{P}{A} \left[1 + \frac{\bar{r}(R-r_i)}{er_i} \right] = -176.2 \text{ MPa}$$

$$(\sigma_{\theta})_B = -\frac{P}{A} \left[1 + \frac{\bar{r}(R-r_o)}{er_o} \right] = 88.1 \text{ MPa}$$

SOLUTION (5.36)

$$A = 20b + 2(60 \times 10) = 20b + 2400$$

We have $r_A = 60 \text{ mm}$ and $r_B = 140 \text{ mm}$. Applying Eq. (5.70):

$$-\sigma_A = \sigma_B = \frac{(-M)(R-r_A)}{Aer_A} = -\frac{(-M)(R-r_B)}{Aer_B}$$

from which

$$r_B(R-r_A) = -r_A(R-r_B), \quad 140(R-60) = -60(R-140)$$

$$\text{or} \quad R = 134 \text{ mm}$$

$$\text{Then} \quad R = \frac{A}{\sum \int \frac{dA}{r}}$$

$$\text{or} \quad A = 84 \left[\int_{60}^{80} \frac{bdr}{r} + \int_{80}^{140} \frac{2(10)dr}{r} \right] = 84 \left[b \ln \frac{8}{6} + 20 \ln \frac{14}{8} \right] \\ = 24.1653b + 1880.3091$$

$$\text{Hence} \quad 20b + 2400 = 24.1653b + 1880.3091$$

$$\text{or} \quad b = 124.8 \text{ mm}$$

SOLUTION (5.37)


$$\text{We have} \quad c = \frac{1}{2}d = 10 \text{ mm} \quad \bar{r} = b + c = 25 \text{ mm}$$

$$R = \frac{1}{2}[\bar{r} + \sqrt{\bar{r}^2 - c^2}] \quad (\text{by Table 5.2})$$

$$= \frac{1}{2}[25 + \sqrt{25^2 - 10^2}] = 23.9564 \text{ mm}$$

$$e = \bar{r} - R = 1.0436 \text{ mm}$$

$$A = \pi c^2 = \pi(10)^2 = 314.16 \text{ mm}^2$$

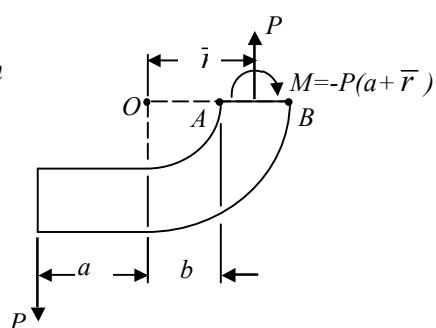

(CONT.)

5.37 (CONT.)

(a) From Eq.(5.74):

$$\begin{aligned}\sigma_A &= \frac{P}{A} - \frac{M(R-r_A)}{Aer_A} = \frac{P}{A} \left[1 + \frac{(a+\bar{r})(R-r_A)}{er_A} \right] \\ &= \frac{800}{314.16} \left[1 + \frac{(50)(23.9564-15)}{(1.0436)(15)} \right] = 75.4 \text{ MPa}\end{aligned}$$




(b) Using Eq.(5.74):

$$\begin{aligned}\sigma_B &= \frac{P}{A} - \frac{M(R-r_B)}{Aer_B} = \frac{P}{A} \left[1 + \frac{(a+\bar{r})(R-r_B)}{er_B} \right] \\ &= \frac{800}{314.16} \left[1 + \frac{50(29.1421-35)}{1.0436(35)} \right] = -34.2 \text{ MPa}\end{aligned}$$



SOLUTION (5.38)

Locate centroid :

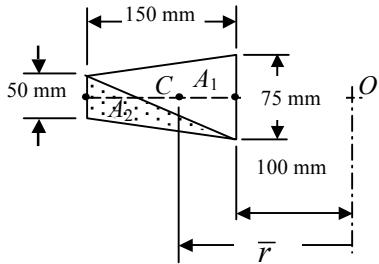


$$\begin{aligned}\bar{r} &= \frac{A_1\bar{r}_1 + A_2\bar{r}_2}{A_1 + A_2} \\ &= \frac{(5625)(150) + (3750)(200)}{5625 + 3750} = 170 \text{ mm} \\ A &= \frac{1}{2}(50+75)(150) = 9375 \text{ mm}^2\end{aligned}$$

$$\begin{aligned}R &= \frac{\frac{1}{2}h^2(b_1+b_2)}{(b_1r_o - b_2r_i)\ln\frac{r_o}{r_i} - h(b_1-b_2)} \\ &= \frac{(0.5)(150)^2(75+50)}{[(75)(250)-(50)(100)]\ln\frac{25}{10} - (150)(75-50)} = 158.9165 \text{ mm}\end{aligned}$$

$$e = \bar{r} - R = 11.0825 \text{ mm}$$

(a) Use Eq.(5.75a),

$$\begin{aligned}(\sigma_\theta)_A &= -\frac{P}{A} - \frac{M(R-r_A)}{Aer_A} = -\frac{P}{A} \left[1 + \frac{\bar{r}(R-r_A)}{er_A} \right] \\ &= -\frac{50(10^3)}{9375} \left[1 + \frac{(170)(158.9175-100)}{(11.0825)(100)} \right] \\ &= -53.5 \text{ MPa}\end{aligned}$$

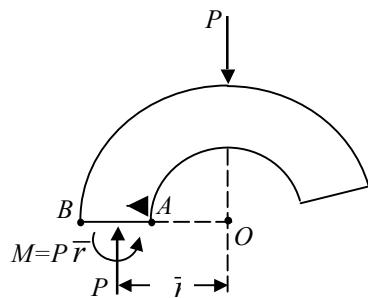

(CONT.)

5.38 (CONT.)

(b) From Eq.(5.75b):

$$\begin{aligned} (\sigma_\theta)_B &= -\frac{P}{A} \left[1 + \frac{\bar{r}(R-r_B)}{er_B} \right] \\ &= -\frac{50(10^3)}{9375} \left[1 + \frac{(170)(158.9175 - 250)}{11.0825(250)} \right] = -24.5 \text{ ksi} \end{aligned} \quad \blacktriangleleft$$

SOLUTION (5.39)

$$A = \frac{1}{2}bh$$

The section width w varies linearly with r . Thus

$$w = c_0 + c_1 r \quad (1)$$

Since

$$\begin{aligned} w &= b & (\text{at } r = r_i) \\ w &= 0 & (\text{at } r = r_o) \end{aligned} \quad (2)$$

Substituting Eq.(1) into Eq.(2);

$$c_1 = -\frac{b}{h} \quad c_0 = \frac{br_o}{h}$$

Then


$$\int_A \frac{dA}{r} = \int_{r_i}^{r_o} \frac{w}{r} dr = \frac{c_0 + c_1 r}{r} dr$$

Inserting c_1 and c_0 into this, after integrating and rearranging, we have

$$\int \frac{dA}{r} = b \left(\frac{r_o}{h} \ln \frac{r_o}{r_i} - 1 \right)$$

Therefore

$$R = \frac{A}{\int \frac{dA}{r}} = \frac{\frac{1}{2}h}{\frac{r_o}{h} \ln \frac{r_o}{r_i} - 1} \quad \blacktriangleleft$$

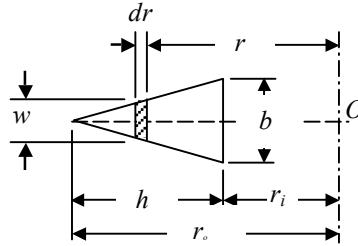

SOLUTION (5.40)

$$A = \pi c^2$$


Through use of the polar coordinates we write:

$$w = 2c \sin \alpha \quad r = \bar{r} - c \cos \alpha$$

$$dr = c \sin \alpha d\alpha$$

$$dA = wdr = 2c^2 \sin^2 \alpha d\alpha$$

$$\int \frac{dA}{r} = \int_0^\pi \frac{2c^2 \sin^2 \alpha}{\bar{r} - c \cos \alpha} d\alpha$$

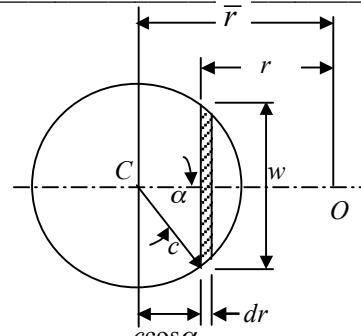

(CONT.)

5.40 (CONT.)

$$\begin{aligned}
 &= 2 \int_0^\pi \frac{c^2(1 - \cos^2 \alpha)}{\bar{r} - c \cos \alpha} = 2 \int_0^\pi \frac{\bar{r}^2 - c^2 \cos^2 \alpha - (r^2 - c^2)}{\bar{r} - c \cos \beta} \\
 &= 2 \int_0^\pi (\bar{r} + c \cos \alpha) d\alpha - 2(\bar{r}^2 - c^2) \int_0^\pi \frac{d\alpha}{\bar{r} - c \cos \alpha} \\
 &= 2\bar{r}\alpha \Big|_0^\pi + 2c \sin \alpha \Big|_0^\pi - 2(\bar{r}^2 - c^2) \frac{2}{\sqrt{\bar{r}^2 - c^2}} \tan^{-1} \left. \frac{\sqrt{\bar{r}^2 - c^2} \tan \frac{\alpha}{2}}{\bar{r} + c} \right|_0^\pi
 \end{aligned}$$

This gives

$$\int \frac{dA}{r} = 2\pi(\bar{r} - \sqrt{\bar{r}^2 - c^2})$$

Hence, it can be shown that

$$R = \frac{A}{\int \frac{dA}{r}} = \frac{1}{2}(\bar{r} + \sqrt{\bar{r}^2 + c^2})$$



SOLUTION (5.41)

$$A = \frac{1}{2}(b_1 + b_2)h$$


The section width w varies linearly with r as

$$w = c_0 + c_1 r \quad (1)$$

We have

$$w = b_1 \quad (\text{at } r = r_i) \quad (2)$$

$$w = b_2 \quad (\text{at } r = r_o)$$

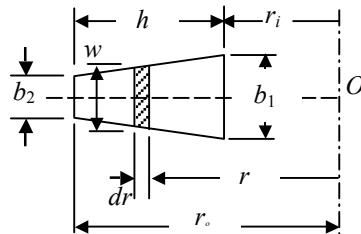

Introduce Eq.(1) into Eq.(2), then solve for c_0 and c_1

$$c_0 = \frac{r_o b_1 - r_i b_2}{h} \quad c_1 = -\frac{b_1 - b_2}{h} \quad (3)$$

Then, we write

$$\int \frac{dA}{r} = \int_{r_i}^{r_o} \frac{w}{r} dr = \int_{r_i}^{r_o} \frac{c_0 + c_1 r}{r} dr = c_0 \ln \frac{r_o}{r_i} + c_1 (r_o - r_i)$$


This gives, substituting Eqs.(3):

$$\int \frac{dA}{r} = \frac{r_o b_1 - r_i b_2}{h} \ln \frac{r_o}{r_i} - (b_1 - b_2)$$

Hence

$$R = \frac{A}{\int \frac{dA}{r}} = \frac{\frac{1}{2}h^2(b_1 + b_2)}{(r_o b_1 - r_i b_2) \ln \frac{r_o}{r_i} - (b_1 - b_2)}$$

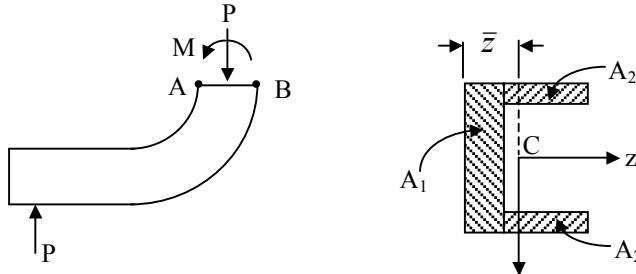

SOLUTION (5.42)


We have

$$\bar{z} = \frac{(A_1 z_1 + A_2 z_2)}{(A_1 + A_2)} = 12.5 \text{ mm}$$

$$\bar{r} = 52.5 \text{ mm} \quad A = 0.0008 \text{ m}^2 \quad r_i = 40 \text{ mm} \quad r_o = 80 \text{ mm}$$

$$R = \frac{A}{\sum \int \frac{dA}{r}} = \frac{800}{\int_{40}^{50} \frac{50dr}{r} + \int_{50}^{80} \frac{2(5)dr}{r}} = 50.4502 \text{ mm}, \quad e = \bar{r} - R = 2.0498 \text{ mm}$$

$$M = (0.06 + 0.04 + 0.0125)P = 337.5 \text{ N}\cdot\text{m}$$

Inner Edge. Using Eq. (5.73),

$$(\sigma_\theta)_A = -\frac{3000}{0.0008} - \frac{337.5(50.4502-40)10^{-3}}{0.0008(2.0498)(40)10^{-6}} \\ = -57.5 \text{ MPa}$$



Outer Edge. Applying Eq. (5.73),

$$(\sigma_\theta)_B = -\frac{3000}{0.0008} - \frac{337.5(50.4502-80)10^{-3}}{0.0008(2.0498)(80)10^{-6}} \\ = 74.6 \text{ MPa}$$



SOLUTION (5.43)

Using Eq. (P5.44), at section A-B of Fig. P5.43:

$$M = -0.182P\bar{r} = -0.182(0.75b)P = -0.136Pb$$

(a) Equation (5.66) yields,

$$N = \left(1 - \frac{1}{4}\right)^2 - 4\left(\frac{1}{4}\right)(\ln 2)^2 = 0.082$$

Point A. Applying Eq. (5.67),

$$(\sigma_\theta)_A = \frac{4M}{tb^2N} \left[\left(1 - \frac{1}{4}\right)(1 + \ln 1) - 2 \cdot \ln 2 \right] + \frac{P}{bt} \\ = \frac{4(-0.136Pb)}{tb^2(0.082)} \left[\frac{3}{4} - 1.3863 \right] + \frac{P}{bt} \\ = 5.22P/bt$$

Point B. Using Eq. (5.67),

$$(\sigma_\theta)_B = \frac{4(-0.136Pb)}{tb^2(0.082)} \left[\frac{3}{4}(1 + \ln 2) - \frac{5}{4} \ln 2 \right] + \frac{P}{bt} \\ = -1.68P/bt$$



(CONT.)

5.43 (CONT.)

(b) We have $\bar{r} = 0.75b$, $r_i = 0.5b$, and $r_o = b$. Thus, $R = (\frac{b}{2})/\ln 2 = 0.7213b$

Points A and B. Apply Eq. (5.74) with $P = P/2$ and $M = -0.136Pb$:

$$(\sigma_\theta)_A = \frac{P}{bt} + 4.2 \frac{P}{bt} = 5.2P/bt$$

$$(\sigma_\theta)_B = \frac{P}{bt} - 2.64 \frac{P}{bt} = -1.64P/bt$$

(c) $(\sigma_\theta)_{A,B} = (\frac{P}{2A}) \pm (\frac{Mc}{I})$

Here $c = \frac{b}{4}$ $I = \frac{tb^3}{96}$

Thus, $(\sigma_\theta)_A = \frac{P}{bt} + \frac{0.136Pb(b/4)}{tb^2/96} = \frac{P}{bt} + 3.26 \frac{P}{bt} = 4.26P/bt$

and $(\sigma_\theta)_B = \frac{P}{bt} - 3.26 \frac{P}{bt} = -2.26P/bt$

Comparing the result, we observe the following differences:

At the point A:

Elasticity vs. hyperbolic 0.4 %

Elasticity vs. linear 18 %


At the point B:

Elasticity vs. hyperbolic 2.4 %

Elasticity vs. Linear 34.5 %

SOLUTION (5.44)

From the condition of symmetry, the distribution of stress in any quadrant is known to be the same as the other.

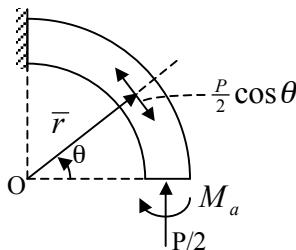

At any angle θ , the bending moment referring to this figure is expressed as follows

$$M_\theta = M_a - \frac{1}{2}P\bar{r}(1-\cos\theta) \quad (a)$$

The problem is statically indeterminate and value of M_a is found first. Note that shear component of the load will be omitted in our solution.

Applying Castigliano's theorem, we have:

$$\frac{\partial U}{\partial M_a} = 4 \int_0^{\pi/2} \frac{1}{EI} M_\theta \frac{\partial M_\theta}{\partial M_a} ds$$

$$0 = \frac{4}{EI} \int_0^{\pi/2} [M_a - \frac{P\bar{r}}{2}(1-\cos\theta)] \bar{r} d\theta$$

$$0 = \frac{4}{EI} \left[\frac{\pi}{2} M_a - \frac{P\bar{r}}{2} \left(\frac{\pi}{2} - 1 \right) \right]$$

(CONT.)

5.44 (CONT.)

solving,

$$M_a = P\bar{r}\left(\frac{1}{2} - \frac{1}{\pi}\right) = 0.182P\bar{r}$$

Then, Eq. (a) becomes

$$M_\theta = 0.182P\bar{r} - \frac{1}{2}P\bar{r}(1 - \cos\theta) \quad (\text{b}) \quad \blacktriangleleft$$

Therefore stress at any point of a section, using Eq. (5.74), is expressed in the form

$$\sigma_\theta = -\frac{P}{2}\frac{\cos\theta}{A} + \frac{M_\theta}{A}\left(\frac{R-r}{er}\right) \quad \blacktriangleleft$$

Here, the moment M_θ is given by Eq. (b).

SOLUTION (5.45)

(a) Using Eq. (P5.44) at $\theta = \pi/4$ (Fig. P5.44):

$$M_\theta = 0.182(1.5)P - \frac{1}{2}P(1.5)(1 - \cos\frac{\pi}{4}) = 0.00533P \text{ N} \cdot \text{m}$$

We have

$$A = 0.05(0.1) = 0.005 \text{ m}^2 \quad R = \frac{h}{\ln \frac{r_o}{r_i}} = \frac{100}{\ln \frac{2}{1}} = 144.2695$$


and

$$e = \bar{r} - R = 150 - 144.2695 = 5.7355 \text{ mm}$$

At inner fiber, $r_i = -0.1 \text{ m}$:

$$(\sigma_\theta)_{\pi/4} = \frac{-(P/2)\cos(\pi/4)}{0.005} - \frac{0.00533P}{0.005} \left[\frac{144.2695 - 100}{5.7355(0.1)} \right] = -182.3P \text{ Pa} \quad \blacktriangleleft$$

(b)

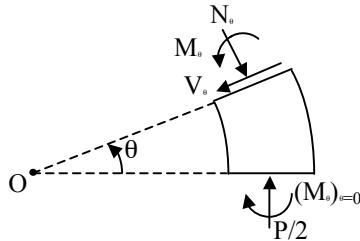

At $\theta = 0^\circ$:

$$M_\theta = 0.182PR \quad N_\theta = -P/2$$

At any angle:

$$M_\theta = 0.182P\bar{r} - 0.5P\bar{r}(1 - \cos\theta) = -0.318P\bar{r} + 0.5P\bar{r}\cos\theta$$

$$\frac{\partial M_\theta}{\partial(P/2)} = -0.636\bar{r} + \bar{r}\cos\theta$$

$$N_\theta = -\frac{P}{2}\cos\theta, \quad \frac{\partial N_\theta}{\partial(P/2)} = -\cos\theta$$

$$V_\theta = -\frac{P}{2}\sin\theta, \quad \frac{\partial V_\theta}{\partial(P/2)} = -\sin\theta$$

(CONT.)

5.46 (CONT.)

Based on the symmetry of the ring, we have

$$\delta = 2 \int_0^{\pi/2} \left[\frac{N_\theta}{AE} \frac{\partial N_\theta}{\partial(P/2)} + \frac{M_\theta}{EI} \frac{\partial M_\theta}{\partial(P/2)} + \frac{\alpha V_\theta}{AG} \frac{\partial V_\theta}{\partial(P/2)} \right] \bar{r} d\theta$$

Substituting the values of M_θ , N_θ , and V_θ , this expression becomes

$$\begin{aligned} \delta_P &= 2 \int_0^{\pi/2} \left[\frac{P}{AE} \cos^2 \theta + \frac{P\bar{r}^2}{2EI} (-0.636 + \cos \theta)^2 + \frac{\alpha}{AG} \frac{P}{2} \sin^2 \theta \right] \bar{r} d\theta \\ &= 2 \left[\frac{P\bar{r}}{2AE} \left| \frac{\theta}{2} \right. + \frac{1}{4} \sin 2\theta \right]_0^{\pi/2} + \frac{P\bar{r}^3}{2EI} \left[0.904\theta - 1.27 \sin \theta + \frac{\sin 2\theta}{4} \right]_0^{\pi/2} \\ &\quad + \frac{\alpha P\bar{r}}{2AG} \left| \frac{\theta}{2} - \frac{1}{4} \sin 2\theta \right|_0^{\pi/2} \end{aligned}$$

from which

$$\delta_P = 2 \left[\frac{P\bar{r}}{2AE} \left(\frac{\pi}{4} \right) + \frac{P\bar{r}^3}{2EI} (0.15) + \frac{\alpha}{AG} \frac{P\bar{r}}{2} \left(\frac{\pi}{2} \right) \right]$$

For the given rectangular cross section:

$$\bar{r} = 0.15 \text{ m} \quad A = 0.005 \text{ m}^2$$

$$\alpha = \frac{6}{5} = 1.2 \quad G = \frac{2}{5} E = 0.4E$$

$$I = \frac{1}{12} (0.05)(0.1)^3 = 4.17(10^{-6}) \text{ m}^4$$

The deflection is therefore

$$\delta_P = 2 \left[\frac{P(0.15)\pi}{0.005E(8)} + \frac{P(0.15)^3(0.15)}{2E(4.17 \times 10^{-6})} + \frac{1.2}{0.4E(0.005)} \frac{P(0.15)\pi}{8} \right]$$


This results in

$$\delta_P = 215.65P/E \text{ m}$$

End of Chapter 5

CHAPTER 6

SOLUTION (6.1)



$$\tau_{all} = \frac{Tc}{\frac{\pi}{2}(c^4 - b^4)}$$

$$\text{or } 100(10^6) = \frac{2(3 \times 10^3)(0.035)}{\pi[(0.035)^4 - b^4]}$$


$$\text{or } 100(10^6)[1.5(10^{-6}) - b^4] = 66.845$$

Solving,

$$b = 0.0302 \text{ m} = 30.2 \text{ mm}$$



SOLUTION (6.2)

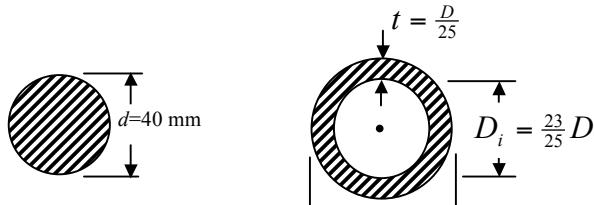

$$\tau_{max} = \frac{T(d/2)}{\pi d^4/32} = \frac{T(D/2)}{\pi(D^4 - D_i^4)/32}$$

or


$$d^3 = D^3 \left[1 - \left(\frac{23}{25} \right)^4 \right]$$

$$(40)^3 = D^3(0.2836)$$

$$D = 60.9 \text{ mm}$$



SOLUTION (6.3)

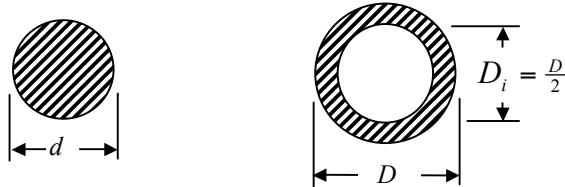

$$\tau_{max} = \frac{16T}{\pi d^3} = \frac{T(D/2)}{\frac{\pi}{32}(D^4 - D_i^4)} = \frac{16T}{\pi D^3 \left(1 - \frac{1}{16} \right)}$$

$$\text{or } d^3 = D^3 \left(\frac{15}{16} \right), \quad D = 1.0217d$$

Thus

$$d = \frac{D}{1.0217} = \frac{60}{1.0217} = 58.7 \text{ mm}$$



SOLUTION (6.4)

Apply the method of sections between the change of load points:

$$T_{CD} = 0.5 \text{ kN}\cdot\text{m} \rightarrow \quad T_{BC} = 1.5 \text{ kN}\cdot\text{m} \rightarrow$$

$$T_{AB} = 2 \text{ kN}\cdot\text{m} \leftarrow$$

Therefore, $\tau_{\max} = 2T/\pi c^3$:

$$\tau_{AB} = \frac{2(2 \times 10^3)}{\pi(0.025)^3} = 81.5 \text{ MPa}$$

$$\tau_{BC} = \frac{2(1.5 \times 10^3)}{\pi(0.02)^3} = 119.4 \text{ MPa}$$

$$\tau_{CD} = \frac{2(0.5 \times 10^3)}{\pi(0.015)^3} = 94.3 \text{ MPa}$$



SOLUTION (6.5)

We have, applying the method of sections:

$$T_{CD} = 0.5 \text{ kN}\cdot\text{m} \rightarrow \quad T_{BC} = 1.5 \text{ kN}\cdot\text{m} \rightarrow$$

$$T_{AB} = 2 \text{ kN}\cdot\text{m} \leftarrow$$

Hence,

$$\tau_{\max} = \frac{2Tc}{\pi(c^4 - b^4)}$$

gives,

$$\tau_{AB} = \frac{2(2 \times 10^3)(0.025)}{\pi[(0.025)^4 - (0.008)^4]} = 82.4 \text{ MPa}$$

$$\tau_{BC} = \frac{2(1.5 \times 10^3)(0.02)}{\pi[(0.02)^4 - (0.008)^4]} = 122.5 \text{ MPa}$$



$$\tau_{CD} = \frac{2(0.5 \times 10^3)(0.015)}{\pi[(0.015)^4 - (0.008)^4]} = 102.6 \text{ MPa}$$

SOLUTION (6.6)

$$T_{BC} = 1 \text{ kN}\cdot\text{m} \rightarrow \quad T_{AB} = 2 \text{ kN}\cdot\text{m} \rightarrow$$

Then, $\tau_{\max} = 2T/\pi c^3$ yields

$$\tau_{BC} = \frac{2(1 \times 10^3)}{\pi(0.02)^3} = 79.58 \text{ MPa}$$



$$\tau_{AB} = \frac{2(2 \times 10^3)}{\pi(0.025)^3} = 81.49 \text{ MPa}$$

Therefore,

$$\begin{aligned} (\tau_{\max})_B &= K\tau_{AB} = 1.6(81.49) \\ &= 130.4 \text{ MPa} \end{aligned}$$

SOLUTION (6.7)

We have

$$T_{BC} = 4 \text{ kN}\cdot\text{m} \longrightarrow \quad T_{AB} = 4 \text{ kN}\cdot\text{m} \longleftarrow$$

Then

$$\phi_c = \sum (TL/GJ) \text{ yields}$$

$$\begin{aligned} \phi_c &= \frac{4(10^3)}{(28 \times 10^9) \frac{\pi}{2}} \left[\frac{0.35}{(0.05)^4} - \frac{0.7}{\frac{3}{2}(0.1)^4} \right] = \frac{1}{3.5\pi} \left(\frac{0.35}{6.25} - \frac{0.7}{150} \right) \\ &= 4.67 \times 10^{-3} \text{ rad} = 0.27^\circ \end{aligned}$$



SOLUTION (6.8)

$$\theta = 50 + 90 = 140^\circ$$

$$J = \frac{\pi}{2} [(0.05)^4 - (0.045)^4] = 3.376 \times 10^{-6} \text{ m}^4$$

From Eq. (6.5a) at $\theta = 140^\circ$:

$$\sigma_{x'} = \tau \sin 280^\circ = -0.985\tau$$

$$|120 \times 10^6| = 0.985 \frac{Tc}{J} = 0.985 \frac{T(0.05)}{3.376 \times 10^{-6}}$$

or $T = 8.23 \text{ kN}\cdot\text{m}$

Similarly, Eq. (6.5b):

$$\tau_{x'y'} = \tau \cos 280^\circ = 0.174\tau$$

gives

$$|50 \times 10^6| = 0.174 \frac{T(0.05)}{3.376 \times 10^{-6}}, \quad T = 19.4 \text{ kN}\cdot\text{m}$$

Thus,

$$T_{all} = 8.23 \text{ kN}\cdot\text{m}$$



SOLUTION (6.9)

From solution of Prob. 6.8:

$$J = 3.376 \times 10^{-6} \text{ m}^4$$

From Equations (6.5) at $\theta = 35 + 90 = 125^\circ$,

$$\sigma_{x'} = \tau \sin 250^\circ = -0.94\tau$$

$$|120 \times (10^6)| = 0.94 \frac{Tc}{J} = 0.94 \frac{T(0.05)}{3.376 \times 10^{-6}}$$

or $T = 8.62 \text{ kN}\cdot\text{m}$

and

$$\tau_{x'y'} = \tau \cos 250^\circ = -0.342\tau$$

(CONT.)

6.9 (CONT.)


$$|50 \times 10^6| = 0.342 \frac{T(0.05)}{3.376 \times 10^{-6}}, \quad T = 9.87 \text{ kN}\cdot\text{m}$$

Thus,

$$T_{all} = 8.62 \text{ kN}\cdot\text{m}$$



SOLUTION (6.10)

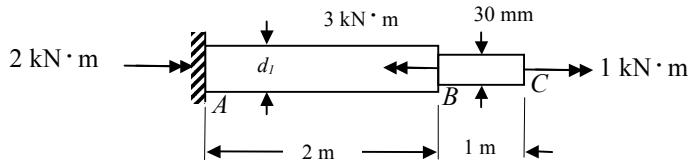

Apply the method of sections:

$$T_{AB} = 2 \text{ kN}\cdot\text{m} \quad \longleftrightarrow \quad T_{BC} = 1 \text{ kN}\cdot\text{m} \quad \rightarrow$$

Then,

$$\frac{J}{c} = \frac{\pi d_1^3}{16} = \frac{T}{\tau_{all}} = \frac{2 \times 10^3}{50 \times 10^6}$$

$$d_1 = 0.05884 \text{ m} = 58.84 \text{ mm}$$

Also,

$$\phi = \sum (TL/GJ) :$$

or

$$0.02 = \frac{10^3}{(39 \times 10^9) \frac{\pi}{32}} \left[\frac{1(1)}{(0.04)^4} - \frac{2(2)}{d_1^4} \right]$$

$$76576.32 = 390625 - \frac{4}{d_1^4}$$

Solving


$$d_1 = 59.74 \times 10^{-3} \text{ m} = 59.74 \text{ mm}$$

We therefore use

$$d_1 = 60 \text{ mm}$$



SOLUTION (6.11)

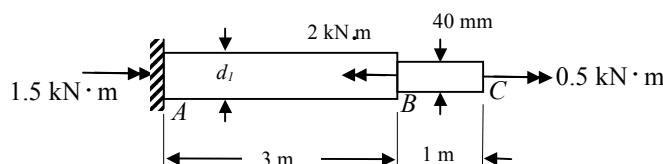

Apply the method of sections:

$$T_{AB} = 1.5 \text{ kN}\cdot\text{m} \quad \longleftrightarrow$$

$$T_{BC} = 0.5 \text{ kN}\cdot\text{m} \quad \rightarrow$$

(CONT.)

6.11 (CONT.)

We have

$$\frac{J}{c} = \frac{\pi d_1^3}{16} = \frac{T}{\tau_{all}} = \frac{1.5 \times 10^3}{50 \times 10^6}$$

$$d_1 = 53.46 \times 10^{-3} \text{ m} = 53.5 \text{ mm}$$

Also,

$$\phi = \sum (TL/GJ) :$$

$$\text{or } 0.02 = \frac{10^3}{(40 \times 10^9) \frac{\pi}{32}} \left[\frac{0.5(1)}{(0.04)^4} - \frac{1.5(3)}{d_1^4} \right]$$

$$78539.82 = 195,312.5 - \frac{4.5}{d_1^4}$$

Solving

$$d_1 = 78.79 \times 10^{-3} \text{ m} = 78.8 \text{ mm}$$

Use $d_1 = 78.8 \text{ mm}$



SOLUTION (6.12)

(a) $\frac{D}{d} = \frac{60}{50} = 1.2 \quad \frac{r}{d} = \frac{1}{50} = 0.02$

Figure D.4: $K = 2.1$.

$$\tau_{nom} = \frac{2T}{\pi c^3} = \frac{2(2 \times 10^3)}{\pi (0.025)^3} = 81.5 \text{ MPa}$$

$$\tau_{max} = 2.1(81.5) = 171.2 \text{ MPa}$$



(b) $\frac{r}{d} = \frac{5}{50} = 0.1, \quad \frac{D}{d} = 1.2; \quad K = 1.33 \quad (\text{Fig. D.4})$

$$\tau_{max} = 1.33(81.5) = 108.4 \text{ MPa}$$



SOLUTION (6.13)

$$\frac{r}{d} = \frac{10}{50} = 0.2 \quad \frac{D}{d} = \frac{100}{50} = 2.0; \quad K = 1.25 \quad (\text{from Fig. D.4})$$


For smaller part of the shaft, $c = d/2 = 25 \text{ mm}$:

$$\tau_{max} = \tau_{all} = K \left(\frac{16T}{\pi d^3} \right); \quad 80(10^6) = 1.25 \left[\frac{16T}{\pi (0.05)^3} \right]$$

Solving

$$T = 1.571 \text{ kN}\cdot\text{m}$$

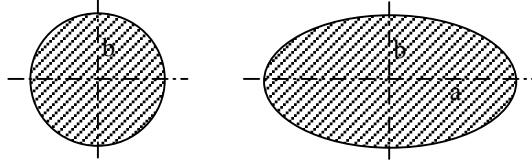

SOLUTION (6.14)


(a) For circular bar:

$$\theta_c = \frac{2T}{Gb^4} \quad \tau_c = \frac{2T}{\pi b^3} = G\theta_c b$$

For elliptical bar:

$$\begin{aligned} \theta_e &= \frac{T(a^2+b^2)}{\pi a^3 b^3 G}, & T &= \frac{\pi a^3 b^3 G}{a^2+b^2} \theta_e \\ \tau_e &= \frac{2T}{\pi a b^2} = \frac{20\theta_e b a^3 G}{a^2+b^2} \end{aligned}$$

We have

$$\frac{\tau_e}{\tau_c} = \frac{2\theta_e b a^2 G}{(a^2+b^2)\theta_c b G}$$

Setting $\theta_e = \theta_c$:

$$\frac{\tau_e}{\tau_c} = \frac{2a^2}{(a^2+b^2)}$$

Since $a > b$, $(a^2 + b^2) < 2a^2$, and $\tau_e/\tau_c > 1$, or

$$\tau_e > \tau_c$$



(b) $T_c = \frac{\theta_c \pi b^4 G}{2}; \quad G\theta_c b = \tau_c$

$$T_c = \frac{\tau_c \pi b^4 G}{Gb} = \frac{\tau_c \pi b^3}{2}$$

$$T_e = \frac{\theta_e \pi a^3 b^3 G}{a^2+b^2}, \quad \tau_e = \frac{2\theta_e b a^2 G}{a^2+b^2}$$

Rearranging,

$$\theta_e = \frac{\tau_e (a^2+b^2)}{2ba^2G}$$

$$\text{Thus, } T_e = \frac{\tau_e a b^2}{2}$$

We obtain

$$\frac{T_c}{T_e} = \frac{(\tau_c \pi b^3 / 2)}{(\tau_e \pi a b^2 / 2)}$$

$$\text{Setting } \tau_e = \tau_c : \quad T_c / T_e = b/a, \text{ or}$$

$$T_e > T_c$$



SOLUTION (6.15)

We have $\pi(c^2 - b^2) = \pi a^2$; $a^2 = c^2 - b^2$.

(a) $T_h = \frac{J\tau_a}{c} = \frac{\pi\tau_a(c^4 - b^4)}{2c}$

$$T_s = \frac{J\tau_a}{a} = \frac{\pi\tau_a a^3}{2}$$

(CONT.)

6.15 (CONT.)

Hence, $\frac{T_h}{T_s} = \frac{c^4 - b^4}{ca^3} = \frac{c^4 - b^4}{c(c^2 - b^2)^{3/2}}$

For $c = 1.4a$:

$$\frac{T_h}{T_s} = \frac{2.8416}{1.3168} = 2.16$$

$$(b) \quad T_h = \frac{JG\phi_a}{L} = \left(\frac{G\phi_a}{L}\right)\left[\frac{\pi(c^4 - b^4)}{2}\right]$$

$$T_s = \left(\frac{G\phi_a}{L}\right)\left(\frac{\pi a^4}{2}\right)$$

Hence, $\frac{T_h}{T_s} = \frac{c^4 - b^4}{a^2} = \frac{c^4 - b^4}{(c^2 - b^2)^2} = \frac{c^2 + b^2}{c^2 - b^2}$

For $c = 1.4b$:

$$\frac{T_h}{T_s} = \frac{2.96}{0.96} = 3.08$$

SOLUTION (6.16)

Use Eqs. (f) of Example 6.2:

$$T_A = \frac{T}{1+(aJ_b/bJ_a)} = \frac{T}{1+\frac{0.4(15)^4(\pi/32)}{0.2(20)^4(\pi/32)}} = \frac{T}{(1+0.6328)} = 0.6124T$$

$$T_B = T - T_A = 0.3876T$$

Based on shear in segment AC:

$$\tau_a = \frac{16T_A}{\pi d_a^3} = \frac{16(0.6124T)}{\pi(0.02)^3} = 150(10^6) \quad \text{or} \quad T = 384.7 \text{ N} \cdot \text{m}$$

Based on shear in segment CB:

$$\frac{16T_B}{\pi d_b^3} = \frac{16(0.3876T)}{\pi(0.015)^3} = 150(10^6)$$

or

$$T = 256.5 \text{ N} \cdot \text{m} = T_{all}$$

SOLUTION (6.17)

Use Eqs. (f) of Example 6.2:

$$T_A = \frac{T}{1+\frac{0.8(15)^4(\pi/32)}{0.5(25)^4(\pi/32)}} = \frac{T}{1+0.2074} = 0.8283T$$

$$T_B = T - T_A = 0.1717T$$

Based on shear in segment AC:

$$\frac{16T_A}{\pi d_a^3} = \frac{16(0.8283T)}{\pi(0.025)^3} = 70(10^6)$$

or $T = 259.3 \text{ N} \cdot \text{m} = T_{all}$

Based on shear in segment CB:

$$\frac{16T_B}{\pi d_b^3} = \frac{16(0.1717T)}{\pi(0.015)^3} = 70(10^6)$$

or

$$T = 270.2 \text{ N} \cdot \text{m}$$

SOLUTION (6.18)

$$\frac{\partial^2 \Phi}{\partial x^2} = k[2(a^2 b - a^2) + 2y^2(b^2 + 1) - 12bx^2]$$

$$\frac{\partial^2 \Phi}{\partial y^2} = k[2(a^2 b - a^2) + 2x^2(b^2 + 1) - 12by^2]$$

Substituting these in Eq. (6.9):

$$k = \frac{G\theta}{2a^2(b-1)+(b^2-6b+1)(x^2+y^2)}$$

In order k be a constant: $b^2 - 6b + 1 = 0$. Thus,

$$k = \frac{G\theta}{2a^2(b-1)}$$



SOLUTION (6.19)

$$u = -\theta z(y - b), \quad v = \theta z(x - z), \quad w = w(x, y)$$

$$\varepsilon_x = \varepsilon_y = \varepsilon_z = 0, \quad \gamma_{xy} = \frac{\partial v}{\partial x} + \frac{\partial u}{\partial y} = 0$$

$$\gamma_{xz} = \frac{\partial w}{\partial x} - \theta(y - b), \quad \gamma_{yz} = \frac{\partial w}{\partial y} + \theta(x - a)$$

$$\text{Thus } \tau_{xz} = G[\frac{\partial w}{\partial x} - \theta(y - b)] = \frac{\partial \Phi}{\partial y}$$

$$\tau_{yz} = G[\frac{\partial w}{\partial y} + \theta(x - a)] = -\frac{\partial \Phi}{\partial x}$$



Substituting these in Eqs. (6.6), (6.7), and (6.11), we obtain

$$\frac{\partial \tau_{xz}}{\partial y} - \frac{\partial \tau_{yz}}{\partial x} = -2G\theta, \quad \frac{\partial^2 \Phi}{\partial x^2} + \frac{\partial^2 \Phi}{\partial y^2} = -2G\theta$$



$$\begin{aligned} \text{and } T &= \iint [(x - a)\tau_{yz} - (y - b)\tau_{xz}] dx dy \\ &= [-\iint (x - a) \frac{\partial \Phi}{\partial x} - \iint (y - b) \frac{\partial \Phi}{\partial y}] dx dy \\ &= 2 \iint \Phi dx dy \end{aligned}$$



We observe that characteristic equations remain unchanged.

SOLUTION (6.20)

$$T = \iint (x\tau_{yz} - y\tau_{xz}) dx dy = -\iint (x \frac{\partial \Phi}{\partial x} - y \frac{\partial \Phi}{\partial y}) dx dy$$

Here

$$\begin{aligned} -\int dy \int x \frac{\partial \Phi}{\partial x} dx &= -\int x d\Phi \Big|_{x_1}^{x_2} dy - [-\iint \Phi dx dy] \\ &= -c \int (x_2 - x_1) dy + \iint \Phi dx dy \\ &= -c \iint dx dy + \iint \Phi dx dy \end{aligned}$$

Note that $(x_2 - x_1)dy$ is area and equals $\iint dx dy$. Similarly,

$$-\int dx \int y \frac{\partial \Phi}{\partial y} dy = -c \iint dx dy + \iint \Phi dx dy$$

Thus,

$$T = 2 \iint (\Phi - c) dx dy$$



SOLUTION (6.21)

$$T_\theta = T \cos^2 \theta$$

Hence,


$$\theta = \int \frac{T_\theta dz}{GJ} = \frac{1}{GJ} \int T \cos^2 \theta ad\theta$$

This gives, at sections A and B:

$$\theta_A = \frac{Ta}{GJ} \int_0^{\pi/2} \left(\frac{1}{2} + \frac{\cos 2\theta}{2} \right) d\theta = \frac{Ta}{2r^4 G}$$

$$\theta_B = \frac{Ta}{GJ} \int_0^\pi \cos^2 \theta d\theta = \frac{Ta}{r^4 G}$$

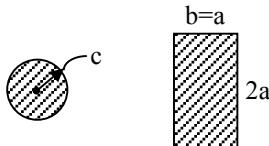

SOLUTION (6.22)


From Table 6.2: $\alpha = 0.246$, $\beta = 0.229$

$$\tau_r = \frac{T}{\alpha ab^2} = \frac{T}{0.492a^3}$$

$$\tau_c = \frac{Tc}{J} = \frac{2T}{\pi c^3}$$

$$\text{Thus, } \frac{T}{0.492a^3} = \frac{2T}{\pi c^3}; \quad c = 0.684a$$

Similarly,

$$\theta_r = \frac{T}{0.229(2a)a^3 G} = \frac{T}{0.458a^4 G}$$

$$\theta_c = \frac{T}{JG} = \frac{2T}{\pi c^4 G}$$

Then,

$$\frac{T}{0.458a^4 G} = \frac{2T}{\pi c^4 G}; \quad c = 0.736a = c_{all}$$



SOLUTION (6.23)

$$\frac{\partial^2 \Phi}{\partial y^2} = k[(x + \frac{h}{3}) + (x + \sqrt{3}y - \frac{2}{3}h) + (x + \frac{h}{3}) + (x - \sqrt{3}y - \frac{2}{3}h) + 2(x - \frac{2}{3}h)]$$

$$\frac{\partial^2 \Phi}{\partial y^2} = k[-3(x + \frac{h}{3}) - 3(x + \frac{h}{3})]$$

Substituting these in Eq. (6.9),

$$-4kh = -2G\theta; \quad k = \frac{G\theta}{2h}$$

Thus,

$$\Phi = -G\theta[\frac{1}{2}(x^2 + y^2) - \frac{1}{2h}(x^3 - 3xy^2) - \frac{2}{27}h^2]$$

Along the x axis $\tau_{xz} = 0$, due the symmetry. Equation (6.8) is therefore,

for $y = 0$:

$$\tau_{yz} = -\frac{\partial \Phi}{\partial x} = \frac{3G\theta}{2h} \left(\frac{2hx}{3} - x^2 \right)$$

(CONT.)

6.23 (CONT.)

$$\begin{aligned} \text{When } x = 0 : \quad \tau_{yz} &= 0 \\ x = \frac{2h}{3} : \quad \tau_{yz} &= 0 \\ x = -\frac{h}{3} : \quad \tau_{yz} &= \tau_{\max} = \frac{G\theta h}{2} \end{aligned}$$



Next, substitute the preceding value of Φ into Eq. (6.11) to obtain

$$\begin{aligned} T &= 2 \iint \Phi dx dy \\ &= -4G\theta \int_0^{h/\sqrt{3}} \int_0^{-\sqrt{3}y+\frac{2}{3}h} \left[\frac{1}{2}(x^2 + y^2) - \frac{1}{2h}(x^3 - 3xy^2) - \frac{2}{27}h^2 \right] dx dy \\ &= \frac{G\theta h^4}{15\sqrt{3}} \end{aligned}$$

This gives

$$\theta = \frac{15\sqrt{3}T}{h^4 G}$$

The shear stress is thus

$$\tau_{\max} = \frac{20T}{(2h/\sqrt{3})^3} = \frac{15\sqrt{3}T}{2h^3}$$



SOLUTION (6.24)

For a circular bar:

$$T = G\theta J = C_c \theta$$

where

$$C_c = \frac{\pi r^4 G}{2} \quad (\text{a})$$

For an elliptical bar (from Example 6.3):

$$H = -\frac{2T(a^2+b^2)}{\pi a^3 b^3} = -2G\theta$$

$$T = \frac{\pi a^3 b^3}{a^2 + b^2} G\theta = C_e \theta$$

$$\text{or } C_e = \frac{\pi a^3 b^3}{a^2 + b^2} G \quad (\text{b})$$

For an equilateral bar (from Prob. 6.23):

$$T = \frac{G\theta h^4}{15\sqrt{3}} = \theta C_t$$

$$\text{or } C_t = \frac{h^4 G}{15\sqrt{3}} \quad (\text{c})$$

Bars have equal areas:

$$A_c = \pi r^2, \quad A_e = \pi ab, \quad A_t = \frac{h^2}{\sqrt{3}}$$

Setting $A_c = A_e = A_t$:

$$r^4 = a^2 b^2 = \frac{h^4}{3\pi^2}$$

Then, Eqs. (a), (b), and (c) give


$$\frac{C_e}{C_c} \frac{2a^3 b^3}{r^4 (a^2 + b^2)} = \frac{2ab}{a^2 + b^2}$$



and

$$\frac{C_t}{C_c} = \frac{h^4 G}{15\sqrt{3}} \frac{2}{\pi r^4 G} = \frac{2\pi\sqrt{3}}{15}$$

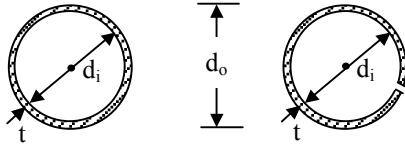

SOLUTION (6.25)


For the seamless tube, from $\theta_1 = T/GJ$

$$\theta_1 = \frac{32T}{\pi d_o^4 (1 - d_i^4/d_o^4) G}$$

For the split tube, referring to Eq. (6.17):

$$\theta_2 = \frac{3T}{G} \frac{1}{\pi (\frac{d_o+d_i}{2}) (\frac{d_o-d_i}{2})^3}$$

We have

$$\frac{\theta_1}{\theta_2} = \frac{2(d_o-d_i)}{3(d_o^2+d_i^2)} \quad (a) \blacktriangleleft$$

For very thin tubes $d_o^2 + d_i^2 \approx 2d_o^2$, and Eq. (a) becomes

$$\frac{\theta_1}{\theta_2} = \frac{4}{3} \left(\frac{t}{d_o} \right)$$

SOLUTION (6.26)

Apply Eqs. (6.17) and (6.19):

$$\tau_{\max} = \frac{3T}{bt^2} = \frac{3(80)}{0.125(0.005)^2} = 76.8 \text{ MPa} \quad \blacktriangleleft$$

$$\theta = \frac{3T}{bt^3 G} = \frac{3(80)}{0.125(0.005)^3 (80 \times 10^9)} = 0.192 \text{ rad/m} \quad \blacktriangleleft$$

SOLUTION (6.27)

Referring to Table 6.1, we have

$$\phi = \theta L = \frac{TL}{\beta ab^2 G} \quad \tau_{\max} = \frac{T}{\alpha ab^2}$$

Thus

$$\frac{\phi}{\tau} = \frac{L}{bG} \frac{\alpha}{\beta} \quad (1)$$

For $a/b = 24/16 = 1.5$; $\alpha = 0.231$ and $\beta = 0.196$

Introducing given data into Eq. (1):

$$\frac{1.5(\pi/180)}{\tau_{\max}} = \frac{0.4(0.231)}{(0.024)(80 \times 10^9)(0.196)}$$

Solving,

$$\tau_{\max} = 106.6 \text{ MPa} \quad \blacktriangleleft$$

SOLUTION (6.28)

From Eq. (1) of solution of Prob. 6.27:

$$b = \frac{\tau_{\max} L \alpha}{G \phi \beta} \quad (a)$$

By Table 6.1: $\alpha = 0.208$ and $\beta = 0.141$.

Substituting the numerical values into Eq. (a), we obtain

$$b = \frac{120(10^6)}{79(10^9)} \frac{2}{25(\pi/180)} \frac{0.204}{0.141} = 10.1 \text{ mm} \quad \blacktriangleleft$$

SOLUTION (6.29)

Equation (6.20) yields

$$J_e = \sum \frac{1}{3} b t^3 = \frac{1}{3} (100)(10)^3 + \frac{1}{3} (115)(4)^3 \\ = 3.5787(10^4) \text{ mm}^4$$

Maximum shear stress occurs on the lower leg:

$$\tau_{\max} = \frac{T_l}{J_e} = \frac{500(0.1)}{3.5787(10^{-8})} = 139.7 \text{ MPa}$$

Angle of twist per unit length is

$$\theta = \frac{T}{J_e G} = \frac{500}{3.5787(10^{-8})(200 \times 10^9)} \\ = 69.86(10^{-3}) \text{ rad/m} = 4.00^\circ \text{ per meter}$$

SOLUTION (6.30)

Refer to Table 6.2.

$$(a) T = \frac{a_2^2 \tau_{\max}}{20} = \frac{(0.045)^3 (50 \times 10^6)}{20} = 228 \text{ N} \cdot \text{m}$$

Also

$$T = \frac{a_2^4 G \theta_{all}}{46.2} = \frac{(0.045)^4 (80 \times 10^9) (1.5\pi/180)}{46.2} \\ = 186 \text{ N} \cdot \text{m} = T_{all}$$

$$(b) \phi = \frac{46.2 T_{\max}}{G} \left[\frac{L_1}{a_1^4} + \frac{L_2}{a_2^4} \right] = \frac{46.2 (186)}{80 \times 10^9} \left[\frac{2.5}{(0.06)^4} + \frac{1.5}{(0.045)^4} \right] \\ = 1.0742(10^{-7}) [192,901.235 + 364,797.897] \\ = 0.06 \text{ rad} = 3.44^\circ$$

SOLUTION (6.31)

Referring to Fig. P6.31, an expression for t is written as

$$t = t_0 \left(1 - \frac{y}{b}\right)$$

Substitute this into the given stress function to obtain,

$$\Phi = G\theta \left[\frac{t_0^2}{4} \left(1 - \frac{y}{b}\right)^2 - x^2 \right]$$

We have

$$T = 2 \iint \Phi dx dy = 4 \int_0^{t_0/2} \int_0^{b(1-\frac{2x}{t_0})} \left[\frac{t_0^2}{4} \left(1 - \frac{y}{b}\right)^2 - x^2 \right] dx dy \\ = 4G\theta \int_0^{t_0/2} \left\{ \frac{t_0^2}{4} \left[b \left(1 - \frac{2x}{t_0}\right) - b \left(1 - \frac{2x}{t_0}\right)^2 + \frac{b}{3} \left(1 - \frac{2x}{t_0}\right)^3 \right] - bx^3 \left(1 - \frac{2x}{t_0}\right) \right\} dx$$

$$\text{Let } u = \frac{(1-2x)}{t_0}, \quad x = \frac{(1-u)t_0}{2}$$

$$du = -\frac{2dx}{t_0}, \quad dx = -\frac{t_0 du}{2}$$

Then, the preceding expression for the torque becomes

$$T = 4G \frac{t_0^3 b}{8} \int_0^1 (u^2 - \frac{2}{3} u^3) du$$

Integrating,

$$T = G\theta t_0^3 / 12$$

SOLUTION (6.32)

(a) From Table 6.2: $T = (2\pi r^3 t G) \theta = C\theta$

$$\text{or } C = 2\pi r^3 t G = 2\pi(0.02375)^3(0.0025)G = 2.1(10^{-7})G$$

$$\tau_{\max} = \frac{T}{2\pi r^2 t} = \frac{T}{2\pi(0.02375)^2(0.0025)} = 112.860T$$

(b) Equation (6.16):

$$C = \frac{bt^3 G}{3} = \frac{(0.02375)(0.0025)^3 G}{3} = 1.24(10^{-10})G$$

Equation (6.18):

$$\tau_{\max} = \frac{3T}{bt^2} = \frac{3T}{(0.02375)(0.0025)^2} = 20,210,526T$$

(c) From Table 6.2: for $a = b$, $t = t_1$:

$$T = (0.02375)^3 t G \theta = 1.34(10^{-5})0.0025 G \theta$$

$$= 3.35(10^{-8})G \theta = C\theta$$

$$\tau_{\max} = \frac{T}{2a^2 t} = \frac{T}{2(0.02375)^2(0.0025)} = 354,571T$$

SOLUTION (6.33)

Referring to Table 6.2:

$$\tau_A = \frac{20T}{a^3}; \quad \frac{420(2)}{3} = \frac{20T}{(0.05)^3}$$

Solving, $T = 1.75 \text{ kN} \cdot \text{m}$

Also

$$\theta = \frac{46.2T}{a^4 G} = \frac{46.2(1.75 \times 10^3)}{(6.25 \times 10^{-6})(80 \times 10^9)} = 0.1617 \text{ rad/m}$$

SOLUTION (6.34)

For a thin-walled tube, letting

$$r_o \approx r_i \approx r_{avg.} = r$$

$$J = \frac{\pi(r_o^4 - r_i^4)}{2} = \frac{\pi}{2}(r_o^2 + r_i^2)(r_o + r_i)(r_o - r_i) = 2\pi r t$$

Equation (6.2):

$$\tau = \frac{Tp}{J} = \frac{Tp}{2\pi r^3 t} = \frac{Tp}{2A r t}$$

Since $r = \rho$, we obtain Eq. (6.22): $\tau = T/2At$.

SOLUTION (6.35)

For a regular hexagon, we can write

$$A = \frac{3\sqrt{3}}{2} a^3 \quad ds = 6a$$

Equation (6.22), substituting the value of A, results in the shear stress

$$\tau = \frac{T}{2At} = \frac{T\sqrt{3}}{9a^2 t}$$

Angle of twist per unit length, using Eq. (6.23):

(CONT.)

6.35 (CONT.)


$$\theta = \frac{\tau(6a)}{2GA} = \frac{3Ta}{2A^2Gt}$$

or

$$\theta = \frac{2T}{9Ga^3t}$$



SOLUTION (6.36)

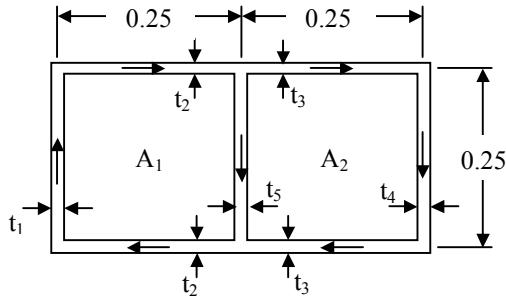

Given:

$$t_1 = 0.012 \text{ m}, \quad t_2 = t_3 = 0.006 \text{ m},$$

$$t_4 = t_5 = 0.01 \text{ m}, \quad G = 28 \text{ GPa}$$

$$T = 56.5 \text{ kN} \cdot \text{m}, \quad A_1 = A_2 = A = 0.0625 \text{ m}^2$$

$$s_1 = s_2 = s_3 = s_4 = s_5 = 0.25 \text{ m}.$$

We write

$$T = 2A_1h_1 + 2A_2h_2 = 2A_1t_1\tau_1 + 2A_2t_3\tau_3$$

or

$$2\tau_1 + \tau_3 = 75.3(10^6) \quad (1)$$

The shear flow yields

$$\tau_1t_1 = \tau_2t_2 \quad (2)$$

$$\tau_2t_2 = \tau_3t_3 + \tau_5t_5 \quad (3)$$

$$\tau_3t_3 = \tau_4t_4 \quad (4)$$

Also,

$$\tau_1s_1 + 2\tau_2s_2 + \tau_5s_5 = 2G\theta A_1 \quad (5)$$

$$-\tau_5s_5 + 2\tau_3s_3 + \tau_4s_4 = 2G\theta A_2 \quad (6)$$

Simultaneous solution of Eqs. (1) through (6), after substitution of the given numerical values yields:

$$\tau_1 = 19.1 \text{ MPa} \quad \tau_2 = 38.2 \text{ MPa}$$


$$\tau_3 = 37.2 \text{ MPa} \quad \tau_4 = 22.3 \text{ MPa} \quad \tau_5 = 0.62 \text{ MPa}$$



and

$$\theta = 6.86(10^{-3}) \text{ rad/m}$$



SOLUTION (6.37)


We have


$$A = \frac{(0.05)(0.05\sin 60^\circ)}{2} = 1.0825(10^{-3}) \text{ m}^2.$$

Then,

$$h = \frac{T}{2A} = \frac{40}{2(0.0010825)} = 18,475.209 \text{ N/m}$$

$$\tau = \frac{h}{t} = \frac{18,475.209}{0.0035} = 5.279 \text{ MPa}$$

$$\theta = \frac{\tau}{2GA} \int ds = \frac{5.279(10^6)}{2(28 \times 10^9)(0.0010825)} [0.05 + 0.05 + 0.05] \\ = 13.063(10^{-3}) \text{ rad/m}$$

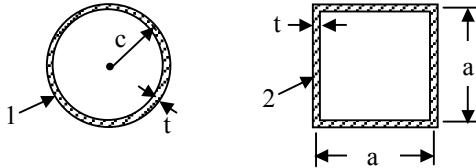SOLUTION (6.38)


For circular tube:

$$\text{Area enclosed by } c, A_{m1} = \pi c^2$$

$$\text{Area of the section, } A_1 = 2\pi c t$$

$$\text{Polar moment of inertia, } J_1 = 2\pi c^3 t$$

For square tube:

$$\text{Enclosed area by } a, A_{m2} = a^2$$

$$\text{Area of the section, } A_2 = 4at$$

Polar moment of inertia (from Table 6.2 with $t = t_1$ and $a = b$):


$$J_2 = \frac{2t_1 a^2 b^2}{(a t_1 + b t_1)} = a^3 t$$

Then, $A_1 = A_2$ gives: $a = \pi c / 2$ and hence, from Eq. (6.22) we obtain

$$\frac{\tau_1}{\tau_2} = \frac{A_{m2}}{A_{m1}} = \frac{a^2}{\pi c^2} = 0.785$$

Similarly, from $\phi = T/GJ$:

$$\frac{\phi_1}{\phi_2} = \frac{J_2}{J_1} = \frac{a^3}{2\pi c^3} = 0.617$$

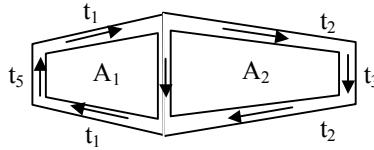SOLUTION (6.39)


We have

$$s_1 = [0.25^2 + 0.0375^2]^{\frac{1}{2}} = 0.2528 \text{ m}$$

$$s_2 = [0.5^2 + 0.05^2]^{\frac{1}{2}} = 0.5025 \text{ m}$$

$$s_3 = 0.15 \text{ m}, \quad s_4 = 0.05 \text{ m}, \quad s_5 = 0.075 \text{ m}$$

and

$$\tau_1 t_1 = \tau_3 t_3 + \tau_2 t_2 \quad (1)$$

$$\tau_5 t_5 = \tau_1 t_1, \quad \tau_2 t_2 = \tau_4 t_4 \quad (2,3)$$

$$T = 2A_1\tau_1 + 2A_2\tau_2 \quad (4)$$

Using Eq. (6.23),

$$\tau_5 s_5 + 2\tau_1 s_1 + \tau_3 s_3 = 2G\theta A_1 \quad (5)$$

$$2\tau_2 s_2 + \tau_4 s_4 - \tau_3 s_3 = 2G\theta A_2 \quad (6)$$

Given: $t_1 = t_2 = t_4 = t_5 = 0.0005 \text{ m}$, $t_3 = 0.00075 \text{ m}$, $G = 28 \text{ GPa}$, and

$$T = 4 \text{ kN} \cdot \text{m}.$$

The cell areas are calculated as

$$A_1 = 0.028125 \text{ m}^2 \quad A_2 = 0.05 \text{ m}^2$$

Substituting the numerical values and solving Eqs. (1) through (6):

$$\tau_1 = \tau_5 = 50.6 \text{ MPa}, \quad \tau_3 = 0.593 \text{ MPa}$$

$$\tau_2 = \tau_4 = 50.88 \text{ MPa}, \quad \theta = 0.0194 \text{ rad/m}$$



SOLUTION (6.40)

(a) We have $\delta_s = \delta_c$ and Eq. (6.37) becomes

$$\frac{P_s R_s^3}{G_s} = \frac{P_c R_c^3}{G_c}; \quad \frac{P_s (0.062)^3}{79(10^9)} = \frac{P_c (0.05)^3}{41(10^9)}$$

Solving,

$$P_s = 1.011 P_c$$

Assume that copper controls

$$\tau_c = \frac{16P_c R_c}{\pi d^3}; \quad 300(10^6) = \frac{16P_c (0.05)}{\pi (0.01)^3}$$

from which

$$P_c = 1178.1 \text{ N}$$

Then,

$$P_s = 1188.4 \text{ N}$$

(CONT.)

6.40 (CONT.)

Check the assumption:

$$\tau_s = \frac{16(1188.4)(0.062)}{\pi(0.01)^3} = 375.25 \text{ MPa}$$

Since $\tau_s < 500 \text{ MPa}$, the assumption is correct.

Thus, the total force is

$$P_t = P_c + P_s = 2366.5 \text{ N}$$
 

(b) For the condition specified,

$$\frac{P_s}{k_s} = \frac{P_c}{k_c}$$

from which

$$\frac{k_s}{k_c} = \frac{P_s}{P_c} 1.011$$
 

End of Chapter 6

CHAPTER 7

SOLUTION (7.1)

Refer to Fig. 7.2 and Eq. (7.10):

$$\frac{\partial^4 w}{\partial x^4} = \frac{1}{h^4} (w_9 - 4w_1 + 6w_0 + w_{11})$$

$$\frac{\partial^4 w}{\partial y^4} = \frac{1}{h^4} (w_{10} - 4w_2 + 6w_0 - 4w_4 + w_{12})$$


$$\frac{\partial^4 w}{\partial x^2 \partial y^2} = \frac{1}{h^4} [w_5 - w_6 + w_7 + w_8 - 2(w_1 - w_2 - w_3 - w_4 + 2w_0)]$$

Substituting these into $\nabla^4 w$:

$$h^4 \nabla^4 w = 20w_0 - 8(w_1 + w_2 + w_3 + w_4) - 2(w_5 + w_6 + w_7 + w_8)$$

$$+ w_9 - w_{10} - w_{11} - w_{12}$$

SOLUTION (7.2)

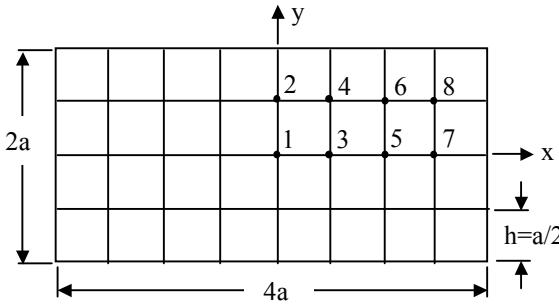

Only a quarter of the section need be considered. Using the symmetry the nodal points are labeled as shown in the preceding figure, and $\Phi = 0$ at the boundary. The finite difference equations for the nodes 1 through 8 are, respectively:

$$-\Phi_1 + 2\Phi_2 + 2\Phi_3 = -2G\theta h^2 \quad (1)$$

$$\Phi_1 - 4\Phi_2 + 2\Phi_4 = -2G\theta h^2 \quad (2)$$

$$\Phi_1 - 4\Phi_3 + 2\Phi_4 + \Phi_5 = -2G\theta h^2 \quad (3)$$

$$\Phi_2 + \Phi_3 - 4\Phi_4 + \Phi_6 = -2G\theta h^2 \quad (4)$$

$$\Phi_3 - 4\Phi_5 + 2\Phi_6 + \Phi_7 = -2G\theta h^2 \quad (5)$$

$$\Phi_4 + \Phi_5 - 4\Phi_6 + \Phi_8 = -2G\theta h^2 \quad (6)$$

$$\Phi_5 - 4\Phi_7 + 2\Phi_8 = -2G\theta h^2 \quad (7)$$

$$\Phi_6 + \Phi_7 - 4\Phi_8 = -2G\theta h^2 \quad (8)$$

Solving,

$$\Phi_1 = 3.587G\theta h^2 \quad \Phi_2 = 2.708G\theta h^2$$

$$\Phi_3 = 3.467G\theta h^2 \quad \Phi_4 = 2.622G\theta h^2$$

$$\Phi_5 = 3.037G\theta h^2 \quad \Phi_6 = 2.313G\theta h^2$$

$$\Phi_7 = 2.055G\theta h^2 \quad \Phi_8 = 1.592G\theta h^2$$

(CONT.)

7.2 (CONT.)

Tables of differences are in P7.2a and P7.2b.

Table P7.2a

(when $y=b$, $\Phi = \Phi_1$; $y=h$, $\Phi = \Phi_2$, etc.)			
y	$\Phi/G\theta h^2$	$\Delta/G\theta h^2$	$\Delta^2/G\theta h^2$
0	3.587	-0.380	-1.828
h	2.708	-2.708	
$2h$	0		

Table P7.2b

(when $x=0$, $\Phi = \Phi_1$; $x=h$, $\Phi = \Phi_3$, etc.)					
x	$\Phi/G\theta h^2$	$\Delta/G\theta h^2$	$\Delta^2/G\theta h^2$	$\Delta^3/G\theta h^2$	$\Delta^4/G\theta h^2$
0	3.587	-0.120	-0.310	-0.242	-0.28
h	3.467	-0.430	-0.552	-0.522	
$2h$	3.037	-0.982	-1.074		
$3h$	2.055	-2.055			
$4h$	0				

We have

$$\begin{aligned} \frac{\partial \Phi}{\partial x} &= \frac{\Delta^4 \Phi_0}{24h^4} [4x^3 - 18x^2h + 22xh^2 - 6h^3] \\ &\quad + \frac{\Delta^2 \Phi_0}{2h^2} [2x - h] + \frac{\Delta^3 \Phi_0}{6h^3} [3x - 6xh + 2h^2] \\ (\frac{\partial \Phi}{\partial x})_{x=4h} &= \frac{\Delta^4 \Phi_0}{24h^4} (50h^3) + \frac{\Delta^2 \Phi_0}{2h^2} (7h) + \frac{\Delta^3 \Phi_0}{6h^3} (26h^2) \end{aligned}$$

Using Table P7.2b, we obtain $(\frac{\partial \Phi}{\partial x})_{x=4h} = -1.418G\theta a$. That is

$$(\tau)_{x=\pm 2a} = -1.418G\theta a$$

Similarly, using Table P7.2a:

$$(\frac{\partial \Phi}{\partial y})_{y=2h} = \frac{\Delta^2 \Phi_0}{2h^2} (2y - h) = -1.811G\theta a$$

$$(\tau)_{y=\pm 2h} = -1.811G\theta a$$

Hence, the error using this method is $[(1.86 - 1.811)/1.86]100 = 2.63\%$

SOLUTION (7.3)

Equation (7.19) is applied at points b, c, d, respectively:

$$2\Phi_c + 1.178\Phi_g - 4.857\Phi_b = -2G\theta h^2$$

$$\Phi_b + 1.178\Phi_f + \Phi_d - 4.857\Phi_c = -2G\theta h^2$$

$$1.178\Phi_c + 1.178\Phi_e - 5.714\Phi_d = -2G\theta h^2$$

(CONT.)

7.3 (CONT.)

Similarly, Eq. (7.16) is applied at points e, f, and g, respectively:

$$\begin{aligned} 2\Phi_d + \Phi_f - 4\Phi_e &= -2G\theta h^2 \\ 2\Phi_c + \Phi_g + \Phi_e - 4\Phi_f &= -2G\theta h^2 \\ 2\Phi_b + 2\Phi_f - 4\Phi_g &= -2G\theta h^2 \end{aligned}$$

In matrix form these equations are written as:

$$\begin{bmatrix} 2 & 0 & 0 & 0 & 2 & -4 \\ 0 & 2 & 0 & 1 & -4 & 1 \\ 0 & 0 & 2 & -4 & 1 & 0 \\ 0 & 1.178 & -5.714 & 1.178 & 0 & 0 \\ 1 & -4.857 & 1 & 0 & 1.178 & 0 \\ -4.857 & 2 & 0 & 0 & 0 & 1.178 \end{bmatrix} \begin{Bmatrix} \Phi_b \\ \Phi_c \\ \Phi_d \\ \Phi_e \\ \Phi_f \\ \Phi_g \end{Bmatrix} = -2G\theta h^2 \{1, 1, 1, 1, 1, 1\}$$

Solution is

$$\begin{aligned} \Phi_b &= 1.612G\theta h^2 & \Phi_c &= 1.487G\theta h^2 \\ \Phi_d &= 0.975G\theta h^2 & \Phi_e &= 1.547G\theta h^2 \\ \Phi_f &= 2.236G\theta h^2 & \Phi_g &= 2.424G\theta h^2 \end{aligned}$$

The finite differences are then

$$\begin{aligned} \Delta &= \Phi_e - \overset{\circ}{\Phi_B} = 1.547G\theta h^2 \\ \Delta^2 &= \Phi_f - 2\Phi_e + \overset{\circ}{\Phi_B} = -0.858G\theta h^2 \\ \Delta^3 &= \Phi_g - 3\Phi_f + 3\Phi_e - \overset{\circ}{\Phi_B} = 0.357G\theta h^2 \\ \Delta^4 &= \Phi_f - 4\Phi_g + 6\Phi_f - 4\overset{\circ}{\Phi_B} + \overset{\circ}{\Phi_B} = -0.232G\theta h^2 \\ \Delta^5 &= \Phi_e - 5\Phi_f + 10\Phi_g - 10\Phi_f + 5\Phi_e - \overset{\circ}{\Phi_B} = -0.018G\theta h^2 \\ \Delta^6 &= \overset{\circ}{\Phi_B} - 6\Phi_e + 15\Phi_f - 20\Phi_g + 15\Phi_f - 6\Phi_e + \overset{\circ}{\Phi_B} = 0.036G\theta h^2 \end{aligned}$$

Hence,

$$\begin{aligned} \tau_B &= (\frac{\partial \Phi}{\partial x})_B = \frac{1}{h}(\Delta - \frac{\Delta^2}{2} + \frac{\Delta^3}{3} - \frac{\Delta^4}{4} + \frac{\Delta^5}{5} - \frac{\Delta^6}{6})G\theta h^2 \\ &= (1.547 + \frac{0.858}{2} + \frac{0.357}{3} + \frac{0.232}{4} - \frac{0.018}{5} - \frac{0.036}{6})G\theta h \end{aligned}$$

or

$$\tau_B = 2.144G\theta h = 0.0107G\theta$$



SOLUTION (7.4)

Applying Eq. (7.16) at points b, c, e, f, and g, we obtain

$$\begin{aligned}\Phi_g + 2\Phi_c - 4\Phi_b &= -2G\theta h^2 & \Phi_b + \Phi_d + \Phi_f - 4\Phi_c &= -2G\theta h^2 \\ 2\Phi_d + \Phi_f - 4\Phi_e &= -2G\theta h^2 & \Phi_g + \Phi_e + 2\Phi_c - 4\Phi_f &= -2G\theta h^2 \\ 2\Phi_f + 2\Phi_b - 4\Phi_g &= -2G\theta h^2\end{aligned}$$

At point d, we apply Eq. (7.19):

$$1.308\Phi_c + \Phi_e - 5.77\Phi_d = -2G\theta h^2$$

Solving these equations, we have

$$\begin{aligned}\Phi_b &= 2.238G\theta h^2 & \Phi_c &= 2.000G\theta h^2 & \Phi_d &= 1.096G\theta h^2 \\ \Phi_e &= 1.715G\theta h^2 & \Phi_f &= 2.667G\theta h^2 & \Phi_g &= 2.953G\theta h^2\end{aligned}$$

The finite differences are the computed as shown in Table P7.4a.

Thus,

$$\begin{aligned}\tau_A &= \left(\frac{\partial \Phi}{\partial x}\right)_A = \frac{1}{h} \left(\Delta - \frac{\Delta^2}{2} + \frac{\Delta^3}{3} - \frac{\Delta^4}{4} \right) G\theta h^2 \\ &= (2.238 + \frac{1.523}{2} + \frac{0.093}{3} + \frac{0.0186}{4}) G\theta h \\ &= 3.035G\theta h = 0.0129G\theta\end{aligned}$$



Table P7.4a

y	$\Phi/G\theta h^2$	$\Delta/G\theta h^2$	$\Delta^2/G\theta h^2$	$\Delta^3/G\theta h^2$	$\Delta^4/G\theta h^2$
0	0	2.238	-1.523	0.093	-0.019
h	2.238	0.715	-1.430	-0.003	
$2h$	2.953	-0.715	-1.523		
$3h$	2.238	-2.238			
$4h$	0				

Alternatively, we construct the table as shown in Fig. P7.4b:

Table P7.4b


y	$\Phi/G\theta h^2$	$\Delta/G\theta h^2$	$\Delta^2/G\theta h^2$
0	2.953	-0.715	-1.523
h	2.238	-2.238	
$2h$	0		

Then we obtain,

$$\begin{aligned}\tau_A &= \left(\frac{\partial \Phi}{\partial y}\right)_{y=2h} = \frac{\Delta\Phi_0}{h} + \frac{3}{2} \frac{\Delta^2\Phi_0}{h} = [-0.715 - \frac{3}{2}(1.523)]G\theta h \\ &= 3.0G\theta h\end{aligned}$$



This result is approximately the same as calculated before. Clearly now computation involved are reduced considerably.

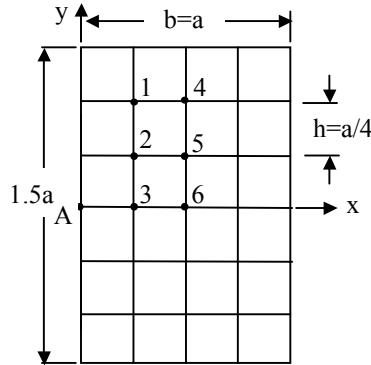SOLUTION (7.5)


Applying Eq. (7.16) at nodes 1 to 6, we obtain

$$\begin{bmatrix} -4 & 1 & 0 & 1 & 0 & 0 \\ 1 & -4 & 1 & 0 & 1 & 0 \\ 0 & 2 & -4 & 0 & 0 & 1 \\ 2 & 0 & 0 & -4 & 1 & 0 \\ 0 & 2 & 0 & 1 & -4 & 1 \\ 0 & 0 & 2 & 0 & 2 & -4 \end{bmatrix} \begin{Bmatrix} \Phi_1 \\ \Phi_2 \\ \Phi_3 \\ \Phi_4 \\ \Phi_5 \\ \Phi_6 \end{Bmatrix} = -2G\theta h^2 \begin{Bmatrix} 1 \\ 1 \\ 1 \\ 1 \\ 1 \\ 1 \end{Bmatrix}$$

Solving,

$$\begin{aligned} \Phi_1 &= 1.551G\theta h^2 & \Phi_2 &= 2.206G\theta h^2 & \Phi_3 &= 2.387G\theta h^2 \\ \Phi_4 &= 1.997G\theta h^2 & \Phi_5 &= 2.887G\theta h^2 & \Phi_6 &= 3.137G\theta h^2 \end{aligned}$$

Then, the differences are as shown in Table P7.5.

Table P7.5

x	$\Phi/G\theta h^2$	$\Delta/G\theta h^2$	$\Delta^2/G\theta h^2$	$\Delta^3/G\theta h^2$	$\Delta^4/G\theta h^2$
0	0	2.387	-1.637	0.137	-0.274
h	2.387	0.75	-1.50	-0.137	
$2h$	3.137	-0.75	-1.637		
$3h$	2.387	-2.387			
$4h$	0				

At point A, we have

$$(\frac{\partial \Phi}{\partial x})_{x=0} = \frac{1}{h} (\Delta\Phi_0 - \frac{\Delta^2\Phi_0}{2} + \frac{\Delta^3\Phi_0}{3} - \frac{\Delta^4\Phi_0}{4}) G\theta h^2$$

Substituting the first row of Table P7.5:


$$(\frac{\partial \Phi}{\partial x})_A = (2.387 + \frac{1.637}{2} + \frac{0.137}{3} + \frac{0.274}{4}) G\theta h$$

or

$$(\frac{\partial \Phi}{\partial x})_A = 0.83G\theta a = \tau_{\max}$$



This differs 2.12 % from the exact solution $0.848G\theta a$ (Table 6.2)

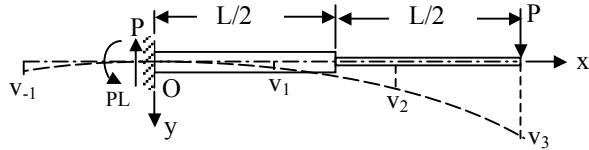SOLUTION (7.6)


Boundary conditions yield,

$$v(0) = 0; \quad v_0 = 0 \quad \text{and} \quad v'(0) = 0; \quad v_1 = v_{-1}$$


Apply Eq. (7.22) at nodes 0, 1, and 2, respectively:

$$\begin{aligned} v_{-1} - 2v_0 + v_0 &= \frac{h^2(PL)}{2EI}; & v_1 &= \frac{h^2}{4EI} PL \\ v_2 - 2v_1 + v_0 &= \frac{h^2(2PL/3)}{2EI}; & v_2 &= \frac{5h^2}{6EI} PL \\ v_3 - 2v_2 + v_1 &= \frac{h^2(PL/3)}{2EI} \end{aligned} \tag{a}$$

Substituting v_1 and v_2 into Eq. (a) we obtain

$$v_3 = \frac{7}{32} \frac{PL^3}{EI}$$

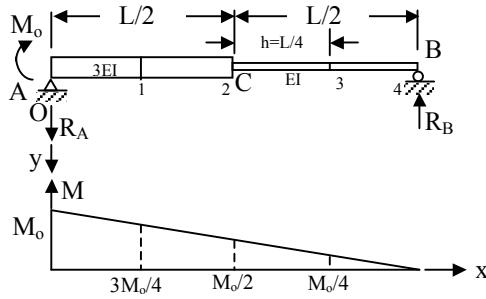

SOLUTION (7.7)


$$\text{Let } C = -\frac{M_0}{EI} h^2 \quad v_0 = v_4 = 0$$

Applying Eq. (7.22) at 1, 2, 3:

$$v_2 - 2v_1 + \Delta_0^o = \frac{C}{4} \quad v_3 - 2v_2 + v_1 = \frac{C}{4} \quad \Delta_4^o - 2v_3 + v_2 = \frac{C}{4}$$

Solving,

$$v_1 = -\frac{3}{8}C \quad v_2 = -\frac{1}{2}C \quad v_3 = -\frac{3}{8}C$$

$$(a) \quad \theta_C = \theta_3 = \frac{1}{2h}(v_3 - v_1) = 0$$




$$(b) \quad v_C = v_2 = \frac{1}{36} \frac{M_0 L^2}{EI}$$



Results are the same as the exact solutions.

SOLUTION (7.8)

Let $C = (p/EI)h^4$. We have $h = a/4 = L/8$ and $v_0 = v_8 = 0$.

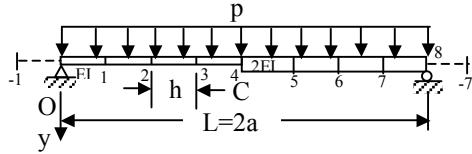

Apply Eq. (7.23) at 1 through 7:

$$v_3 - 4v_2 + 5v_1 = C \quad (1)$$

$$v_4 - 4v_3 + 6v_2 - 4v_1 = C \quad (2)$$

$$v_5 - 4v_4 + 6v_3 - 4v_2 + v_1 = C \quad (3)$$

$$v_6 - 4v_5 + 6v_4 - 4v_3 + v_2 = \frac{C}{1.5} \quad (4)$$

$$v_7 - 4v_6 + 6v_5 - 4v_4 + v_3 = \frac{C}{2} \quad (5)$$

$$-4v_7 + 6v_6 - 4v_5 + v_4 = \frac{C}{2} \quad (6)$$

$$5v_7 - 4v_6 + v_5 = \frac{C}{2} \quad (7)$$

Solving,


$$v_C = v_4 = 0.00966 \frac{pL^4}{EI} = 0.1546 \frac{pa^4}{EI}$$

Note:

$$(v_C)_{exact} = 5pa^4/32EI$$
◀

SOLUTION (7.9)

$$\text{Let } N = p_0 L^4 / EI$$

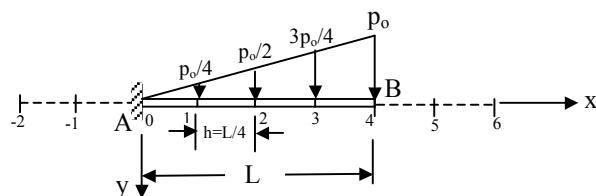

Boundary conditions at A:

$$v'(0) = 0; \quad v_1 = v_{-1}$$

$$v(0) = 0; \quad v_0 = 0$$

$$v''''(0) = 0; \quad v_2 - 8v_1 + v_{-2} = 0$$

Apply Eq. (7.23) at 1 through 4:

$$7v_1 - 4v_2 + v_3 = (0.25)^5 N$$

$$-4v_1 + 6v_2 - 4v_3 + v_4 = (0.5)^9 N$$

$$v_1 - 4v_2 + 6v_3 - 4v_4 + v_5 = 3(0.5)^{10} N$$

$$v_2 - 4v_3 + 6v_4 - 4v_5 + v_6 = (0.25)^4 N$$

(CONT.)

7.9 (CONT.)

Boundary conditions at B:

$$v'''(L) = 0; \quad -v_2 + 2v_3 - 2v_5 + v_6 = 0$$

$$v''(L) = 0; \quad v_3 - 2v_4 + v_5 = 0$$

The foregoing six equations are solved to yield

$$v_1 = 0.010742 \text{ N} \quad v_2 = 0.035156 \text{ N}$$

$$v_3 = 0.066406 \text{ N} \quad v_4 = 0.099609 \text{ N}$$

$$v_5 = 0.132812 \text{ N} \quad v_6 = 0.167969 \text{ N}$$



The error is therefore

$$\frac{0.099609 - 0.091667}{0.091667} \times 100 = 8.7\%.$$

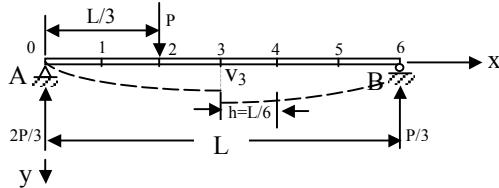
SOLUTION (7.10)


Figure (a)

Application of Eq. (7.22) at points 1 through 5 gives, respectively:

$$v_2 - 2v_1 + v_0 = -\frac{PL}{9EI}h^2$$

$$v_3 - 2v_2 + v_1 = -\frac{2PL}{9EI}h^2$$

$$v_4 - 2v_3 + v_2 = -\frac{PL}{EI}h^2$$

$$v_5 - 2v_4 + v_3 = -\frac{PL}{EI}h^2$$

$$v_6 - 2v_5 + v_4 = -\frac{PL}{EI}h^2$$

(a)

The boundary conditions are $v_0 = v_6 = 0$. Then Eqs. (a) may be represented in matrix form as

$$\begin{bmatrix} -2 & 1 & 0 & 0 & 0 \\ 1 & -2 & 1 & 0 & 0 \\ 0 & 1 & -2 & 1 & 0 \\ 0 & 0 & 1 & -2 & 1 \\ 0 & 0 & 0 & 1 & -2 \end{bmatrix} \begin{Bmatrix} v_1 \\ v_2 \\ v_3 \\ v_4 \\ v_5 \end{Bmatrix} = \begin{Bmatrix} 2 \\ 4 \\ 3 \\ 2 \\ 1 \end{Bmatrix} C$$


where $C = -PL^3/648EI$. Solving the foregoing; $v_1 = -6.67C$, $v_2 = -11.33$,

$v_4 = -9.67C$, $v_5 = -5.33C$, and $v_3 = -12C$, or

$$v_3 = 0.01852 \frac{PL^3}{EI}$$



Note: The exact value of the deflection at the center (see Table D.4) is $0.01775PL^3/EI$.

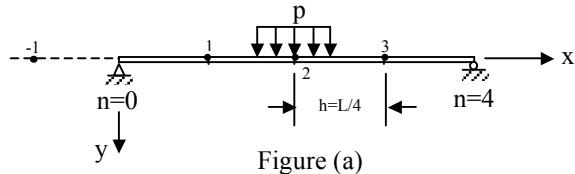SOLUTION (7.11)


We observe that because of symmetry only half of the beam span need be considered as shown in Fig. (a). From the boundary conditions $v(0) = v''(0) = 0$ (Fig. 7.6) and symmetry:

$$v_0 = v_4 = 0 \quad v_1 = -v_{-1} \quad v_1 = v_3 \quad (a)$$

By Eq. (7.23) at points 1 and 2,

$$v_3 - 4v_2 + 6v_1 - 4v_0 + v_{-1} = 0 \quad (b)$$

$$v_4 - 4v_3 + 6v_2 - 4v_1 + v_0 = \frac{ph^4}{EI}$$

Substituting Eqs. (a) into Eqs. (b), we obtain


$$6v_1 - 4v_2 = 0$$

$$-4v_1 + 3v_2 = \frac{ph^4}{EI}$$

Solving the above and setting $h = L/4$ yields $v_1 = 0.0039 pL^4/EI$ and

$$v_2 = v_{\max} = 0.0059 \frac{pL^4}{EI}$$

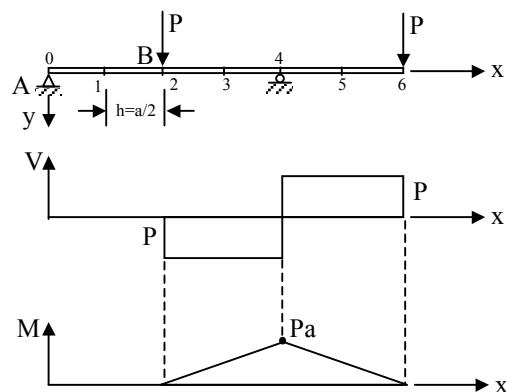

SOLUTION (7.12)


Equation (7.22) is applied at nodes 1, 2, 3, respectively:

$$0 - 2v_1 + v_2 = 0; \quad v_1 = v_2/2$$

$$v_1 - 2v_2 + v_3 = 0; \quad v_2 = 2v_3/3$$

$$v_2 - 2v_3 + 0 = (h^2/EI)(Pa/2)$$

or $v_3 = -3Pah^2/8EI$

(CONT.)

7.12 (CONT.)

Thus,

$$v_B = v_2 = -\frac{1}{16} \frac{Pa^3}{EI} = -0.0625 \frac{Pa^3}{EI}$$

and

$$v_1 = -Pa^3/32EI$$

Slop at A is then

$$\theta_A = \frac{v_1 - v_{-1}}{2h} = \frac{v_1}{h} = -\frac{Pa^2}{16EI}$$

We have $v_B = 0.08333 Pa^3/EI$ as exact solution. Error is thus

$$\frac{0.08333 - 0.0625}{0.08333} \times 100 = 25\%$$

SOLUTION (7.13)

Boundary conditions yield

$$v(0) = 0; \quad v_0 = 0$$

$$v'(0) = 0; \quad v_1 = v_{-1}$$

and

$$v''(L) = 0 = v_4 - 2v_3 + v_2$$

$$\text{or } v_4 = 2v_3 - v_2 \quad (1)$$

$$v'''(L) = 0 = v_5 - 2v_4 + 2v_2 - v_1$$

or

$$v_5 = 4v_3 - 4v_2 + v_1 \quad (2)$$

Apply Eq. (7.23) at points 1, 2, and 3, with $v_0 = 0$ and $v_1 = v_{-1}$:

$$v_3 - 4v_2 + 7v_1 = \frac{pL^4}{162EI} \quad (3)$$

$$v_4 - 4v_3 - 6v_2 - 4v_1 = \frac{pL^4}{81EI} \quad (4)$$

$$v_5 - 4v_4 + 6v_3 - 4v_2 + v_1 = \frac{pL^4}{81EI} \quad (5)$$


Solving Eqs. (1) to (6),

$$v_3 = 7pL^4/54EI$$

$$\text{and } v_1 = 4v_3/21 \quad v_2 = 4v_3/7$$

SOLUTION (7.14)

$$h = L/4 \quad C = ph^4/EI \quad v_1 = v_{-1}$$

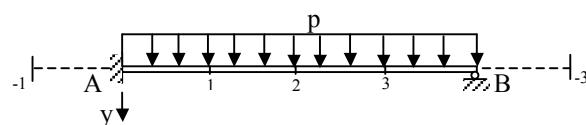

(CONT.)

7.14 (CONT.)

Apply Eq. (7.22) at 1, 2, 3:

$$v_3 - 4v_2 + 7v_1 = C \quad -4v_3 + v_2 - 4v_1 = C$$

$$5v_3 - 4v_2 + v_1 = C$$


Solving, $v_1 = 0.90909 \frac{ph^4}{EI}$ $v_3 = 1.36364 \frac{ph^4}{EI}$

$$v_2 = v_{\max} = 1.68182 \frac{ph^4}{EI}$$

$$= 0.00657 \frac{PL^4}{EI} \downarrow$$

$$\theta_B = \theta_{\max} = \frac{1}{2h}(v_5 - v_3) = -\frac{v_3}{h}$$

$$= -0.02131 \frac{PL^3}{EI} \blacktriangleleft$$

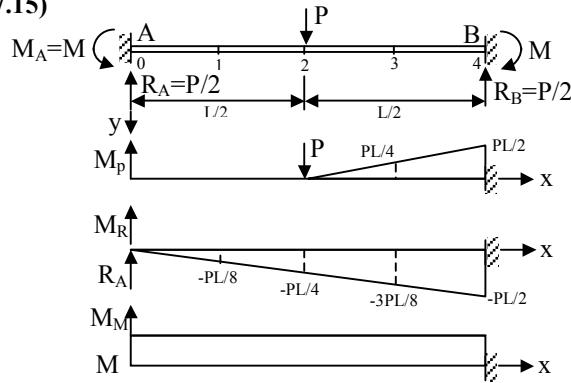SOLUTION (7.15)


$$v_1 = v_{-1}, \quad v_1 = v_3 \text{ (due to symmetry), } v_3 = v_5$$

$$v_0 = v_4 = 0, \quad C = L^3/16EI.$$

Apply Eq.(7.22) at 1 through 4:

$$v_2 - 2v_1 + \not{v}_0 = \left(-\frac{PL}{8} + M\right)C \quad (1)$$

$$v_3 - 2v_2 + v_1 = \left(-\frac{PL}{4} + M\right)C \quad (2)$$

$$\not{v}_4 - 2v_3 + v_2 = \left(\frac{PL}{4} - \frac{3PL}{8} + M\right)C \quad (3)$$

$$v_5 - 2\not{v}_4 + v_3 = \left(\frac{PL}{4} - \frac{PL}{2} + M\right)C \quad (4)$$

Equations (4), (3), (2) lead to

$$2v_3 = MC$$


$$v_2 = (2M - \frac{PL}{8})C$$

$$v_1 = (\frac{9M}{2} - \frac{PL}{2})C$$

Then, Eq. (1) gives

$$M = \frac{1}{8}PL \blacktriangleleft$$

Note: $M_{\text{exact}} = \frac{1}{8}PL$

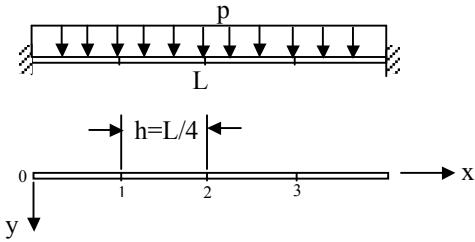SOLUTION (7.16)


Boundary conditions are $v_0 = v_4 = 0$ and from symmetry $v_1 = v_3$.

Then, using Eq. (7.23) at nodes 1 and 2:

$$v_1 + 6v_1 - 4v_2 + v_3 = \frac{ph^4}{EI}$$

$$-4v_1 + 6v_2 - 4v_3 = \frac{ph^4}{EI}$$

Solving,

$$v_2 = \frac{ph^4}{EI} = \frac{p}{EI} \left(\frac{L}{4}\right)^4 = 0.00391 \frac{pL^4}{EI}$$

The exact solution is


$$v_2 = 0.002604 \frac{pL^4}{EI}$$

The slope is zero at nodes 0, 2, and 4. Thus,

$$\theta_1 = \theta_3 = \frac{v_2 - v_0}{2h} = \frac{(0.00391)4}{2L} \frac{pL^4}{EI}$$

$$= 0.078 \frac{pL^3}{EI}$$

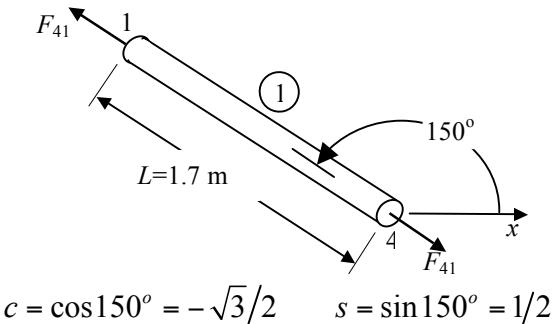

SOLUTION (7.17)


$$\frac{AE}{L} = \frac{13.5(10^{-4})(69 \times 10^9)}{1.7}$$

$$= 54.79 \times 10^6 \text{ N/m}$$

$$c = \cos 150^\circ = -\sqrt{3}/2 \quad s = \sin 150^\circ = 1/2$$

(a) Equation (7.38):

$$[k]_e = 54.79 \times 10^6 \begin{bmatrix} 3/4 & -\sqrt{3}/4 & -3/4 & \sqrt{3}/4 \\ -\sqrt{3}/4 & 1/4 & \sqrt{3}/4 & -1/4 \\ -3/4 & -\sqrt{3}/4 & 3/4 & -\sqrt{3}/4 \\ \sqrt{3}/4 & -1/4 & -\sqrt{3}/4 & 1/4 \end{bmatrix}$$

(CONT.)

7.17 (CONT.)

or

$$[k]_e = 54.79 \begin{bmatrix} 0.75 & -0.433 & -0.75 & 0.433 \\ -0.433 & 0.25 & 0.433 & -0.25 \\ -0.75 & -0.433 & 0.75 & -0.433 \\ 0.433 & -0.25 & -0.433 & 0.75 \end{bmatrix} MN/m$$

(b) Equation (7.39) with i=4 and j=1:

$$F_{41} = 54.79(10^6) \begin{bmatrix} -\frac{\sqrt{3}}{2} & \frac{1}{2} \end{bmatrix} \begin{Bmatrix} 2+1.1 \\ -1.5+1.2 \end{Bmatrix} (10^{-3})$$

or $F_1 = F_{41} = -73.14 \text{ kN}$



(c) Then $\{\delta\}_e = [T]\{\delta\}_e$, give

$$\begin{Bmatrix} \bar{u}_4 \\ \bar{v}_4 \\ \bar{u}_1 \\ \bar{v}_1 \end{Bmatrix} = \begin{bmatrix} -0.866 & 0.5 & 0 & 0 \\ -0.5 & -0.866 & 0 & 0 \\ 0 & 0 & -0.866 & 0.5 \\ 0 & 0 & -0.5 & -0.866 \end{bmatrix} \begin{Bmatrix} -1.1 \\ -1.2 \\ 2 \\ 1.5 \end{Bmatrix} = \begin{Bmatrix} 0.35 \\ 1.59 \\ -0.98 \\ -0.3 \end{Bmatrix} mm$$



SOLUTION (7.18)

We have

$$\left(\frac{AE}{L}\right)_1 = \frac{AE}{L} \quad \left(\frac{AE}{L}\right)_2 = \frac{2AE}{L} \quad \left(\frac{AE}{L}\right)_3 = \frac{3AE}{L}$$

Equation (7.25a):

$$[k]_1 = \frac{AE}{L} \begin{bmatrix} 1 & -1 \\ -1 & 1 \end{bmatrix} \quad [k]_2 = \frac{AE}{L} \begin{bmatrix} 2 & -2 \\ -2 & 2 \end{bmatrix} \quad [k]_3 = \frac{AE}{L} \begin{bmatrix} 3 & -3 \\ -3 & 3 \end{bmatrix}$$

(a) System stiffness matrix, $[k] = [k]_1 + [k]_2 + [k]_3$ is order of 4×4 . Thus

$$[K] = \frac{AE}{L} \begin{bmatrix} 1 & -1 & 0 & 0 \\ -1 & 3 & -2 & 0 \\ 0 & -2 & 5 & -3 \\ 0 & 0 & -3 & 3 \end{bmatrix}$$



(CONT.)

(b)

$$\begin{Bmatrix} F_{1x} \\ F_{2x} \\ F_{3x} \\ F_{4x} \end{Bmatrix} = \frac{AE}{L} \begin{bmatrix} 1 & -1 & 0 & 0 \\ -1 & 3 & -2 & 0 \\ 0 & -2 & 5 & -3 \\ 0 & 0 & -3 & 3 \end{bmatrix} \begin{Bmatrix} u_1 \\ u_2 \\ u_3 \\ u_4 \end{Bmatrix} \quad (1)$$

Boundary conditions are $u_1 = u_4 = 0$. We have $F_{3x} = -P$. Thus

$$\begin{Bmatrix} 0 \\ -P \end{Bmatrix} = \frac{AE}{L} \begin{bmatrix} 3 & -2 \\ -2 & 5 \end{bmatrix} \begin{Bmatrix} u_2 \\ u_3 \end{Bmatrix}$$

Solving

$$u_2 = -\frac{2PL}{11AE} \quad u_3 = -\frac{3PL}{11AE}$$


(c) Equations (1) :

$$\begin{Bmatrix} F_{1x} \\ F_{2x} \\ F_{3x} \\ F_{4x} \end{Bmatrix} = \frac{AE}{L} \begin{bmatrix} 1 & -1 & 0 & 0 \\ -1 & 3 & -2 & 0 \\ 0 & -2 & 5 & -3 \\ 0 & 0 & -3 & 3 \end{bmatrix} \begin{Bmatrix} 0 \\ -2P/11 \\ -3P/11 \\ 0 \end{Bmatrix} \frac{L}{AE} = \begin{Bmatrix} 2P/11 \\ 0 \\ -P \\ 9P/11 \end{Bmatrix}$$



The reactions are

$$R_1 = \frac{2}{11}P \rightarrow \quad R_4 = \frac{9}{11}P \rightarrow$$



SOLUTION (7.19)

We have

$$\left(\frac{AE}{L}\right)_{1,2} = \frac{A(2E)}{L/3} = \frac{6AE}{L}$$

$$\left(\frac{AE}{L}\right)_3 = \frac{2A(E)}{L/3} = \frac{6AE}{L}$$

There are four displacement components (u_1, u_2, u_3, u_4) and so the order of the system matrix is 4x4. Using Eq. (7.25a):

$$[k]_1 = [k]_2 = [k]_3 = \frac{6AE}{L} \begin{bmatrix} 1 & -1 \\ -1 & 1 \end{bmatrix}$$

7.19 (CONT.)

(a)

$$[K] = \frac{6AE}{L} \begin{bmatrix} 1 & -1 & 0 & 0 \\ -1 & (1+1) & -1 & 0 \\ 0 & -1 & (1+1) & -1 \\ 0 & 0 & -1 & 1 \end{bmatrix} = \frac{6AE}{L} \begin{bmatrix} 1 & -1 & 0 & 0 \\ -1 & 2 & -1 & 0 \\ 0 & -1 & 2 & -1 \\ 0 & 0 & -1 & 1 \end{bmatrix}$$



(b)

$$\begin{Bmatrix} F_{1x} \\ F_{2x} \\ F_{3x} \\ F_{4x} \end{Bmatrix} = \frac{AE}{L} \begin{bmatrix} 1 & -1 & 0 & 0 \\ -1 & 2 & -1 & 0 \\ 0 & -1 & 2 & -1 \\ 0 & 0 & -1 & 1 \end{bmatrix} \begin{Bmatrix} u_1 \\ u_2 \\ u_3 \\ u_4 \end{Bmatrix}$$

(1)



Boundary conditions are $u_1 = u_4 = 0$ and $F_{x3} = P$. Equation (1) is then

$$\begin{Bmatrix} 0 \\ P \end{Bmatrix} = \frac{AE}{L} \begin{bmatrix} 2 & -1 \\ -1 & 2 \end{bmatrix} \begin{Bmatrix} u_2 \\ u_3 \end{Bmatrix}$$

Solving

$$u_2 = \frac{PL}{9AE} \quad u_3 = \frac{PL}{18AE}$$



(c) Equations (1) result in

$$\begin{Bmatrix} F_{1x} \\ F_{2x} \\ F_{3x} \\ F_{4x} \end{Bmatrix} = \frac{6AE}{L} \begin{bmatrix} 1 & -1 & 0 & 0 \\ -1 & 2 & -1 & 0 \\ 0 & -1 & 2 & -1 \\ 0 & 0 & -1 & 1 \end{bmatrix} \begin{Bmatrix} 0 \\ PL/9AE \\ PL/18AE \\ 0 \end{Bmatrix} \frac{L}{AE} = \begin{Bmatrix} -2P/3 \\ P \\ 0 \\ -P/3 \end{Bmatrix}$$



The reactions are

$$R_1 = \frac{2}{3}P \leftarrow \quad R_4 = \frac{1}{3}P \leftarrow$$



SOLUTION (7.20)

$$\left(\frac{AE}{L}\right)_1 = \frac{AE}{L} \quad \left(\frac{AE}{L}\right)_2 = \frac{AE}{L} \quad \left(\frac{AE}{L}\right)_3 = \frac{4AE}{5L} = 0.8 \frac{AE}{L}$$

Equation (7.25a):

$$[k]_1 = [k]_2 = \frac{AE}{L} \begin{bmatrix} 1 & -1 \\ -1 & 1 \end{bmatrix} \quad [k]_3 = \frac{AE}{L} \begin{bmatrix} 0.8 & -0.8 \\ -0.8 & 0.8 \end{bmatrix}$$

(CONT.)

7.20 (CONT.)

(a) System matrix, $[k] = [k]_1 + [k]_2 + [k]_3$, is then

$$[K] = \frac{AE}{L} \begin{bmatrix} 1 & -1 & 0 & 0 \\ -1 & (1+1) & -1 & 0 \\ 0 & -1 & (1+0.8) & -0.8 \\ 0 & 0 & -0.8 & 0.8 \end{bmatrix} \quad \blacktriangleleft$$

(b)

$$\begin{bmatrix} F_{1x} \\ F_{2x} \\ F_{3x} \\ F_{4x} \end{bmatrix} = \frac{AE}{L} \begin{bmatrix} 1 & -1 & 0 & 0 \\ -1 & 2 & -1 & 0 \\ 0 & -1 & 1.8 & -0.8 \\ 0 & 0 & -0.8 & 0.8 \end{bmatrix} \begin{bmatrix} u_1 \\ u_2 \\ u_3 \\ u_4 \end{bmatrix} \quad (1)$$

Boundary conditions are $u_1 = u_4 = 0$, We have $F_{x3} = P$. Thus

$$\begin{bmatrix} 0 \\ P \end{bmatrix} = \frac{AE}{L} \begin{bmatrix} 2 & -1 \\ -1 & 1.8 \end{bmatrix} \begin{bmatrix} u_2 \\ u_3 \end{bmatrix}$$

Solving

$$u_2 = -\frac{PL}{2.6AE} \quad u_3 = \frac{PL}{1.3AE} \quad \blacktriangleleft$$

(c) Equations (1) yield

$$\begin{bmatrix} F_{1x} \\ F_{2x} \\ F_{3x} \\ F_{4x} \end{bmatrix} = \frac{AE}{L} \begin{bmatrix} 1 & -1 & 0 & 0 \\ -1 & 2 & -1 & 0 \\ 0 & -1 & 1.8 & -0.8 \\ 0 & 0 & -0.8 & 0.8 \end{bmatrix} \begin{bmatrix} 0 \\ P/2.6 \\ P/1.3 \\ 0 \end{bmatrix} \frac{L}{AE} = \begin{bmatrix} -P/2.6 \\ 0 \\ P \\ -1.6P/2.6 \end{bmatrix} \quad \blacktriangleleft$$

The reactions are

$$R_1 = \frac{1}{2.6}P \leftarrow \quad R_4 = \frac{0.8}{1.3}P \leftarrow \quad \blacktriangleleft$$

SOLUTION (7.21)

Table P7.21 Data for the truss of Fig P7.21

Element	Length(m)	θ	c	s	c^2	cs	s^2
1	7.5	36.9°	0.8	0.6	0.639	0.48	0.36
2	6	0°	1	0	1	0	0
3	4.5	90°	0	1	0	0	1
4	4.5	0°	1	0	1	0	0
5	$4.5\sqrt{2}$	135°	-0.707	0.707	0.5	-0.5	0.5

(CONT.)

7.21 (CONT.)

$$[k]_1 = \frac{AE}{7.5} \begin{bmatrix} u_1 & v_1 & u_2 & v_2 \\ 0.639 & 0.48 & -0.639 & -0.48 \\ 0.48 & 0.361 & -0.48 & -0.361 \\ -0.639 & -0.48 & 0.639 & 0.48 \\ -0.48 & -0.361 & 0.48 & 0.361 \end{bmatrix}$$

$$[k]_2 = \frac{AE}{6.0} \begin{bmatrix} u_1 & v_1 & u_3 & v_3 \\ 1 & 0 & -1 & 0 \\ 0 & 0 & 0 & 0 \\ -1 & 0 & 1 & 0 \\ 0 & 0 & 0 & 0 \end{bmatrix}$$

$$[k]_3 = \frac{AE}{4.5} \begin{bmatrix} u_2 & v_2 & u_3 & v_3 \\ 0 & 0 & 0 & 0 \\ 0 & 1 & 0 & -1 \\ 0 & 0 & 0 & 0 \\ 0 & -1 & 0 & 1 \end{bmatrix}$$

$$[k]_4 = \frac{AE}{4.5} \begin{bmatrix} u_3 & v_3 & u_4 & v_4 \\ 1 & 0 & -1 & 0 \\ 0 & 0 & 0 & 0 \\ -1 & 0 & 1 & 0 \\ 0 & 0 & 0 & 0 \end{bmatrix}$$

$$[k]_5 = \frac{AE}{4.5\sqrt{2}} \begin{bmatrix} u_2 & v_2 & u_4 & v_4 \\ 0.5 & -0.5 & -0.5 & 0.5 \\ -0.5 & 0.5 & 0.5 & -0.5 \\ -0.5 & 0.5 & 0.5 & -0.5 \\ 0.5 & -0.5 & -0.5 & 0.5 \end{bmatrix}$$

SOLUTION (7.22)

Table P7.22 Data for the truss of Fig.P7.22

Element	Length(m)	θ	c	s	c^2	cs	s^2
1	2.4	0°	1	0	1	0	0
2	2.6	22.62°	0.923	0.385	0.852	0.355	0.148
3	1.0	-90°	0	1	0	0	1
4	2.4	0°	1	0	1	0	0
5	2.6	22.62°	0.923	0.385	0.852	0.355	0.148

(CONT.)

7.22 (CONT.)

(a) Use Eq.(7.38);

$$[k]_1 = \frac{AE}{2.4} \begin{bmatrix} u_A & v_A & u_C & v_C \\ 1 & 0 & -1 & 0 \\ 0 & 0 & 0 & 0 \\ -1 & 0 & 1 & 0 \\ 0 & 0 & 0 & 0 \end{bmatrix}$$

$$[k]_2 = \frac{AE}{2.6} \begin{bmatrix} u_A & v_A & u_B & v_B \\ 0.852 & 0.355 & -0.852 & -0.355 \\ 0.355 & 0.148 & -0.355 & -0.148 \\ -0.852 & -0.355 & 0.852 & 0.355 \\ -0.355 & -0.148 & 0.355 & 0.148 \end{bmatrix} \blacktriangleleft$$

$$[k]_3 = \frac{AE}{1.0} \begin{bmatrix} u_B & v_B & u_C & v_C \\ 0 & 0 & 0 & 0 \\ 0 & 1 & 0 & -1 \\ 0 & 0 & 0 & 0 \\ 0 & -1 & 0 & 1 \end{bmatrix} \blacktriangleleft$$

$$[k]_4 = \frac{AE}{2.4} \begin{bmatrix} u_B & v_B & u_D & v_D \\ 1 & 0 & -1 & 0 \\ 0 & 0 & 0 & 0 \\ -1 & 0 & 1 & 0 \\ 0 & 0 & 0 & 0 \end{bmatrix} \blacktriangleleft$$

$$[k]_5 = \frac{AE}{2.6} \begin{bmatrix} u_C & v_C & u_D & v_D \\ 0.852 & 0.355 & -0.852 & -0.355 \\ 0.355 & 0.148 & -0.355 & -0.148 \\ -0.852 & -0.355 & 0.852 & 0.355 \\ -0.355 & -0.148 & 0.355 & 0.148 \end{bmatrix} \blacktriangleleft$$

(CONT.)

7.22 (CONT.)

(b) Global Stiffness Matrix $[K] =$

$$AE \begin{bmatrix} u_A & v_A & u_B & v_B & u_C & v_C & u_D & v_D \\ 0.745 & 0.137 & -0.328 & -0.137 & -0.417 & 0 & 0 & 0 \\ 0.137 & -0.057 & -0.137 & -0.057 & 0 & 0 & 0 & 0 \\ -0.328 & -0.137 & 0.745 & 0.137 & 0 & 0 & -0.833 & 0 \\ -0.137 & -0.057 & 0.137 & 1.057 & 0 & -2 & 0 & 0 \\ -0.417 & 0 & 0 & 0 & 0.745 & 0.137 & -0.328 & -0.137 \\ 0 & 0 & 0 & -2 & 0.137 & 1.057 & -0.137 & -0.057 \\ 0 & 0 & -0.833 & 0 & -0.655 & -0.273 & 0.745 & 0.137 \\ 0 & 0 & 0 & 0 & -0.137 & -0.057 & 0.137 & 0.057 \end{bmatrix} \blacktriangleleft$$

$$\{F\} = [K]\{\delta\}; \quad \begin{bmatrix} R_{Ax} \\ R_{Ay} \\ 0 \\ 0 \\ 0 \\ 0 \\ P \\ R_{Dy} \end{bmatrix} = [K] \begin{bmatrix} 0 \\ 0 \\ u_B \\ v_B \\ u_C \\ v_C \\ u_D \\ 0 \end{bmatrix} \quad \blacktriangleleft$$

SOLUTION (7.23)

(a) Element 1 $\theta = 135^\circ$ $c^2 = 0.5$ $cs = -0.5$ $s^2 = 0.5$

Equation (7.38): $u_1 \quad v_1 \quad u_2 \quad v_2$

$$[k]_1 = \frac{AE}{L} \begin{bmatrix} 0.5 & -0.5 & -0.5 & 0.5 \\ -0.5 & 0.5 & 0.5 & -0.5 \\ -0.5 & 0.5 & 0.5 & -0.5 \\ 0.5 & -0.5 & -0.5 & 0.5 \end{bmatrix} \quad \blacktriangleleft$$

Element 2 $\theta = 180^\circ$ $c^2 = 1.0$ $cs = 0$ $s^2 = 0$

$$[k]_2 = \frac{AE}{L} \begin{bmatrix} u_1 & v_1 & u_3 & v_3 \\ 1 & 0 & -1 & 0 \\ 0 & 0 & 0 & 0 \\ -1 & 0 & 1 & 0 \\ 0 & 0 & 0 & 0 \end{bmatrix} \quad \blacktriangleleft$$

(CONT.)

7.23 (CONT.)

$$\text{Element 3} \quad \theta = 270^\circ \quad c^2 = 0 \quad cs = 0 \quad s^2 = 1.0$$

$$[k]_3 = k' \begin{bmatrix} u_1 & v_1 & u_4 & v_4 \\ 0 & 0 & 0 & 0 \\ 0 & 1.0 & 0 & -1.0 \\ 0 & 0 & 0 & 0 \\ 0 & -1.0 & 0 & 1.0 \end{bmatrix}$$

where $k' = kL/AE$



(b) System matrix is 8x8. Superposition. $[K] = \sum [k]$ results in

$$[K] = \frac{AE}{L} \begin{bmatrix} u_1 & v_1 & u_2 & v_2 & u_3 & v_3 & u_4 & v_4 \\ 1.5 & -0.5 & -0.5 & 0.5 & -1 & 0 & 0 & 0 \\ -0.5 & 0.5 & 0.5 & -0.5 & 0 & 0 & 0 & -k' \\ -0.5 & 0.5 & 0.5 & -0.5 & 0 & 0 & 0 & 0 \\ 0.5 & -0.5 & -0.5 & 0.5 & 0 & 0 & 0 & 0 \\ -1 & 0 & 0 & 0 & 1 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & -k' & 0 & 0 & 0 & 0 & 0 & k' \end{bmatrix}$$



where $k' = kL/AE$.

(c) Boundary conditions are

$$u_2 = v_2 = u_3 = v_3 = u_4 = v_4 = 0$$

Therefore

$$\begin{Bmatrix} 0 \\ -P \\ F_{2x} \\ F_{2y} \\ F_{3x} \\ F_{3y} \\ F_{4x} \\ F_{4y} \end{Bmatrix} = [K] \begin{Bmatrix} u_1 \\ u_2 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \end{Bmatrix}$$



The total 7×7 stiffness matrix can be reduced to a 7×4 matrix by using the following antisymmetrical conditions:

$$u_1 = -u_5, \quad u_2 = -u_4, \quad \text{and} \quad v_2 = v_1$$

SOLUTION (7.24)

Table P7.24 Data for the truss of Fig.P7.24

Element	Length(m)	θ	c	s	c^2	cs	s^2
1	5	53.13°	0.6	0.8	0.36	0.48	0.64
2	4	180°	-1	0	1	0	0

(a) Use Eq.(7.38):

$$[k]_1 = \frac{AE}{5} \begin{bmatrix} u_1 & v_1 & u_2 & v_2 \\ 0.36 & 0.48 & -0.36 & -0.48 \\ 0.48 & 0.64 & -0.48 & -0.64 \\ -0.36 & -0.48 & 0.36 & 0.48 \\ -0.48 & -0.64 & 0.48 & 0.64 \end{bmatrix}$$

$$[k]_2 = \frac{AE}{4} \begin{bmatrix} u_2 & v_2 & u_3 & v_3 \\ 1 & 0 & -1 & 0 \\ 0 & 0 & 0 & 0 \\ -1 & 0 & 1 & 0 \\ 0 & 0 & 0 & 0 \end{bmatrix}$$

(b) Global Stiffness Matrix

$$[K] = AE \begin{bmatrix} u_1 & v_1 & u_2 & v_2 & u_3 & v_3 \\ 0.072 & 0.096 & -0.072 & -0.096 & 0 & 0 \\ 0.096 & 0.128 & -0.096 & -0.128 & 0 & 0 \\ -0.072 & -0.096 & 0.322 & 0.096 & -0.25 & 0 \\ -0.096 & -0.128 & 0.096 & 0.128 & 0 & 0 \\ 0 & 0 & -0.25 & 0 & 0.25 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 \end{bmatrix}$$

(c)

$$\begin{Bmatrix} 0 \\ -6000 \end{Bmatrix} = AE \begin{bmatrix} 0.322 & 0.096 \\ 0.093 & 0.128 \end{bmatrix} \begin{Bmatrix} u_2 \\ v_2 \end{Bmatrix}$$

$$\begin{Bmatrix} u_2 \\ v_2 \end{Bmatrix} = \frac{1}{10(10^6)} \begin{bmatrix} 4 & -3 \\ -3 & 10.063 \end{bmatrix} \begin{Bmatrix} 0 \\ -6000 \end{Bmatrix} = \begin{Bmatrix} 0.9 \\ -3.02 \end{Bmatrix} (10^{-3}) \text{ m}$$

(d)

$$\begin{Bmatrix} R_{1x} \\ R_{1y} \\ R_{3x} \end{Bmatrix} = AE \begin{bmatrix} -0.072 & -0.096 \\ -0.096 & -0.128 \\ -0.25 & 0 \end{bmatrix} \begin{Bmatrix} u_2 \\ v_2 \end{Bmatrix} = \begin{Bmatrix} 4.5024 \\ 6.0032 \\ -4.5 \end{Bmatrix} \text{ kN}$$

(CONT.)

7.24 (CONT.)

(e) Use Eq.(7.39)

$$F_{12} = AE \begin{bmatrix} 0.6 & 0.8 \end{bmatrix} \begin{Bmatrix} u_2 \\ v_2 \end{Bmatrix} = 20(10^6) \begin{bmatrix} 0.6 & 0.8 \end{bmatrix} \begin{Bmatrix} 0.0018 \\ -0.00604 \end{Bmatrix} = -75 \text{ kN} \quad (C)$$

$$F_{23} = AE \begin{bmatrix} -1 & 0 \end{bmatrix} \begin{Bmatrix} -u_2 \\ -v_2 \end{Bmatrix} = 20(10^6) \begin{bmatrix} -1 & 0 \end{bmatrix} \begin{Bmatrix} -0.0018 \\ 0.00604 \end{Bmatrix} = 36 \text{ kN} \quad (T)$$



SOLUTION (7.25)

We have $E = 105 \text{ GPa}$ $A = 10 \times 10^{-4} \text{ m}^2$

Table P7.25 Data for the truss of Fig.P7.25

Element	Length(m)	θ	c	s	c^2	cs	s^2
1	5	53.13°	0.6	0.8	0.36	0.48	0.64
2	4	90°	0	1	0	0	1

(a) Apply Eq.(7.38):

$$[k]_1 = \frac{AE}{5} \begin{bmatrix} u_1 & v_1 & u_2 & v_2 \\ 0.36 & 0.48 & -0.36 & -0.48 \\ 0.48 & 0.64 & -0.48 & -0.64 \\ -0.36 & -0.48 & 0.36 & 0.48 \\ -0.48 & -0.64 & 0.48 & 0.64 \end{bmatrix}$$



$$[k]_2 = \frac{AE}{4} \begin{bmatrix} u_1 & v_1 & u_3 & v_3 \\ 0 & 0 & 0 & 0 \\ 0 & 1 & 0 & -1 \\ 0 & 0 & 0 & 0 \\ 0 & -1 & 0 & 1 \end{bmatrix}$$



(b) Global Stiffness Matrix

$$[K] = 10^7 \begin{bmatrix} u_1 & v_1 & u_2 & v_2 & u_3 & v_3 \\ 0.756 & 1.008 & -0.756 & -1.008 & 0 & 0 \\ 1.008 & 3.969 & -1.008 & -1.344 & 0 & -2.625 \\ -0.756 & -1.008 & 0.756 & 1.008 & 0 & 0 \\ -1.008 & -1.344 & 1.008 & 1.344 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & -2.625 & 0 & 0 & 0 & 2.625 \end{bmatrix}$$

(CONT.)

7.25 (CONT.)

(c)

$$\begin{Bmatrix} F_{1x} \\ 10,000 \end{Bmatrix} = 10^7 \begin{bmatrix} 0.756 & 1.008 \\ 1.008 & 3.969 \end{bmatrix} \begin{Bmatrix} -0.015 \\ v_1 \end{Bmatrix}$$

$$10 \times 10^3 = (1.008 \times 10^7)(-0.015) + 3.696 \times 10^7 v_1 \quad \text{or} \quad v_1 = 0.0044 \text{ m}$$

$$F_{1x} = (0.756 \times 10^7)(-0.015) + 1.008 \times 10^7 v_1 \quad \text{or} \quad F_{1x} = -69.4 \text{ kN}$$

(d) Support reactions:

$$\begin{Bmatrix} F_{2x} \\ F_{2y} \\ F_{3x} \\ F_{3y} \end{Bmatrix} = 10^7 \begin{bmatrix} -0.756 & -1.008 \\ -1.008 & -1.344 \\ 0 & 0 \\ 0 & -2.625 \end{bmatrix} \begin{Bmatrix} -0.015 \\ 0.0044 \end{Bmatrix} = \begin{Bmatrix} 69 \\ 92.1 \\ 0 \\ -115.5 \end{Bmatrix} \text{ kN}$$

SOLUTION (7.26)

Equation (7.38):

$$[k] = [K] = \frac{EI}{L^3} \begin{bmatrix} 12 & 6L & -12 & 6L \\ 6L & 4L^2 & -6L & 2L^2 \\ -12 & -6L & 12 & -6L \\ 6L & 2L^2 & -6L & 4L^2 \end{bmatrix}$$

(a) Boundary conditions are $v_2 = \theta_2 = 0$. Equation (7.45a) becomes

$$\begin{Bmatrix} -P \\ 0 \end{Bmatrix} = \frac{EI}{L^2} \begin{bmatrix} 12 & 6L \\ 6L & 4L^2 \end{bmatrix} \begin{Bmatrix} v_1 \\ \theta_1 \end{Bmatrix}$$

$$\text{Solving, } \theta_1 = \frac{PL^2}{2EI} \quad v_1 = -\frac{PL^3}{3EI}$$

(b) Equation (7.45a):

$$\begin{Bmatrix} F_{1y} \\ M_1 \\ F_{2y} \\ M_2 \end{Bmatrix} = \frac{EI}{L^3} \begin{bmatrix} 12 & 6L & -12 & 6L \\ 6L & 4L^2 & -6L & 2L^2 \\ -12 & -6L & 12 & -6L \\ 6L & 2L^2 & -6L & 4L^2 \end{bmatrix} \begin{Bmatrix} -PL^3/3EI \\ PL^2/2EI \\ 0 \\ 0 \end{Bmatrix}$$

Solving

$$\begin{Bmatrix} F_{1y} \\ M_1 \\ F_{2y} \\ M_2 \end{Bmatrix} = \begin{Bmatrix} -P \\ 0 \\ P \\ -PL \end{Bmatrix}$$

$$\text{where } F_{2y} = R_2 = P.$$

SOLUTION (7.27)

Due to the symmetry only one-half of the beam need be considered. Referring to Case 3 of Table D.5, equivalent nodal forces obtained (see Fig. a).

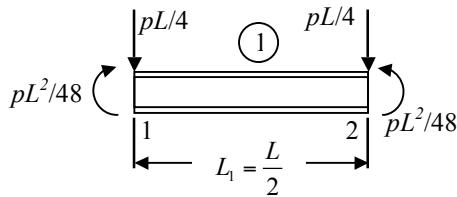


Figure (a) Equivalent nodal forces

Boundary conditions are $v_1 = \theta_2 = 0$

We have $M_1 = -pL^2/48$ and

$$F_{2y} = -pL/4$$

Equation (7.45a), with element of length $L_1 = L/2$.

$$\begin{Bmatrix} pL^2/48 \\ -pL/4 \end{Bmatrix} = \frac{EI}{L_1^3} \begin{bmatrix} 4L_1^2 & -6L_1 \\ -6L_1 & 12 \end{bmatrix} \begin{Bmatrix} \theta_1 \\ v_2 \end{Bmatrix} = \frac{8EI}{L^3} \begin{bmatrix} L_1^2 & -3L \\ -3L_1 & 12 \end{bmatrix} \begin{Bmatrix} \theta_1 \\ v_2 \end{Bmatrix}$$

Inverting

$$\begin{Bmatrix} \theta_1 \\ v_2 \end{Bmatrix} = \frac{L^3}{24EI} \begin{bmatrix} 12/L^2 & 3/L \\ 3/L & 1 \end{bmatrix} \begin{Bmatrix} pL^2/48 \\ -pL/4 \end{Bmatrix}$$


or $\begin{Bmatrix} \theta_1 \\ v_2 \end{Bmatrix} = \begin{Bmatrix} -pL^3/24EI \\ -5pL^4/384EI \end{Bmatrix}$

This is the exact solution (See Table D.4)



SOLUTION (7.28)

Due to symmetry, only one-half of the beam need be considered.

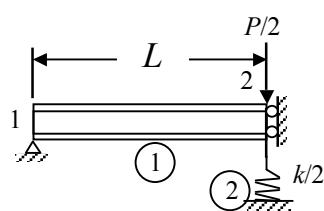

$$[k]_1 = \frac{EI}{L^3} \begin{bmatrix} 12 & 6L & -12 & 6L \\ 6L & 4L^2 & -6L & 2L^2 \\ -12 & -6L & 12 & -6L \\ 6L & 2L^2 & -6L & 4L^2 \end{bmatrix}$$

$$[k]_2 = \frac{EI}{L^3} \begin{bmatrix} 0 & 0 & 0 & 0 \\ kL^3/EI & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 \end{bmatrix}$$

Therefore

$$[K] = \frac{EI}{L^3} \begin{bmatrix} 12 & 6L & -12 & 6L \\ 6L & 4L^2 & -6L & 2L^2 \\ -12 & -6L & 12 + \frac{kL^3}{EI} & -6L \\ 6L & 2L^2 & -6L & 4L^2 \end{bmatrix}$$

(CONT.)

7.28 (CONT.)

- (a) Boundary conditions are $v_1 = 0$ and $\theta_2 = 0$. Equation (7.45a)
with $F_{2y} = -P/2$ and $M_1 = 0$:

$$\begin{Bmatrix} 0 \\ -P/2 \end{Bmatrix} = \frac{EI}{L^3} \begin{bmatrix} 4L^2 & -6L \\ -6L & 12 + \frac{kL^3}{EI} \end{bmatrix} \begin{Bmatrix} \theta_1 \\ v_2 \end{Bmatrix}$$

Introduce the data and solve:

$$v_2 = -7.9338 \text{ mm} \quad \theta_1 = -2.9752 \text{ rad}$$

(b)

$$\begin{Bmatrix} F_{1y} \\ 0 \\ F_{2y} \\ M_2 \end{Bmatrix} = \frac{EI}{L^3} \begin{bmatrix} 12 & 6L & -12 & 6L \\ 6L & 4L^2 & -6L & 2L^2 \\ -12 & -6L & 12 + \frac{kL^3}{EI} & -6L \\ 6L & 2L^2 & -6L & 4L^2 \end{bmatrix} \begin{Bmatrix} 0 \\ -2.9752 \\ -7.9338 \\ 0 \end{Bmatrix} (10^{-3})$$

or

$$\begin{Bmatrix} F_{1y} \\ F_{2y} \\ M_2 \end{Bmatrix} = \begin{Bmatrix} 5.20 \text{ kN} \\ -3.80 \text{ kN} \\ -20.8 \text{ kN}\cdot\text{m} \end{Bmatrix}$$

$$F_{\text{spring}} = 200(7.9338) = 1.587 \text{ kN} \quad (C)$$

From symmetry: $F_{1y} = F_{3y} = 5.20 \text{ kN} \uparrow$

SOLUTION (7.29)

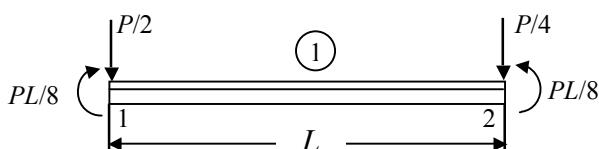


Figure (a). Equivalent Nodal forces.

Boundary conditions are

$$v_1 = 0 \quad \theta_1 = 0$$

We have

$$M_2 = -M_1 = \frac{PL}{8}$$

$$F_{1y} = F_{2y} = -\frac{P}{2}$$

Equation (7.45a) reduces to

$$\begin{Bmatrix} -P/2 \\ PL/8 \end{Bmatrix} = \frac{EI}{L^3} \begin{bmatrix} 12 & -6L \\ -6L & 4L^2 \end{bmatrix} \begin{Bmatrix} v_1 \\ \theta_2 \end{Bmatrix}$$

Inverting

$$\begin{Bmatrix} v_2 \\ \theta_2 \end{Bmatrix} = \frac{L}{6EI} \begin{bmatrix} L^2 & 3L \\ 3L & 6 \end{bmatrix} \begin{Bmatrix} -P/2 \\ PL/8 \end{Bmatrix} = \begin{Bmatrix} -5PL^3/48EI \\ -PL^2/8EI \end{Bmatrix}$$

SOLUTION (7.30)

We have $(\frac{EI}{L})_1 = \frac{EI}{L^3}$ and $(\frac{EI}{L})_2 = \frac{EI/4}{L^3} = \frac{EI}{4L^3}$

So, the stiffness matrices $[k]_1 + [k]_2$ and $[K]$ are the same as obtained in Example 7.10.

Boundary conditions are $v_1 = 0$, $\theta_1 = 0$, and $v_3 = 0$. Equation (f) of Example 7.10 becomes

$$\begin{cases} v_2 \\ \theta_2 \\ \theta_3 \end{cases} = \frac{L^2}{276EI} \begin{bmatrix} 28L & 18 & -30 \\ 18 & 51/L & -39/L \\ -30 & -39/L & 111/L \end{bmatrix} \begin{cases} -P \\ 3PL \\ 0 \end{cases}$$

$$= \frac{PL^3}{276EI} \begin{cases} 8 \\ 84/L \\ -48/L \end{cases} = \frac{PL^3}{69EI} \begin{cases} -2 \\ 21/L \\ -12/L \end{cases}$$

Substituting the given data:

$$\begin{cases} v_2 \\ \theta_2 \\ \theta_3 \end{cases} = \frac{(30 \times 10^3)(1.2)^3}{69(207 \times 10^3)(15)} \begin{cases} -8 \\ 168 \\ -96 \end{cases} = \begin{cases} -1.936 \text{ mm} \\ 0.041 \text{ rad} \\ -0.023 \text{ rad} \end{cases}$$
◀

SOLUTION (7.31)

(a) The three element stiffness are identical. Equation (7.46):

$$[k]_1 = [k]_2 = [k]_3 = \frac{EI}{L^3} \begin{bmatrix} 12 & 6L & -12 & 6L \\ 6L & 4L^2 & -6L & 2L^2 \\ -12 & -6L & 12 & -6L \\ 6L & 2L^2 & -6L & 4L^2 \end{bmatrix}$$
◀

(b) The beam stiffness matrix, $[K] = [k]_1 + [k]_2 + [k]_3$, is assembled as

$$[K] = \frac{EI}{L^3} \begin{bmatrix} v_1 & \theta_1 & v_2 & \theta_2 & v_3 & \theta_3 & v_4 & \theta_4 \\ 12 & 6L & -12 & 6L & 0 & 0 & 0 & 0 \\ 6L & 4L^2 & -6L & 2L^2 & 0 & 0 & 0 & 0 \\ -12 & -6L & 24 & 0 & -12L & 6L & 0 & 0 \\ 6L & 2L^2 & 0 & 8L^2 & -6L & 2L^2 & 0 & 0 \\ 0 & 0 & -12L & -6L & 24 & 0 & -12 & 6L \\ 0 & 0 & 6L & 2L^2 & 0 & 8L^2 & -6L & 2L^2 \\ 0 & 0 & 0 & 0 & -12 & -6L & 12 & -6L \\ 0 & 0 & 0 & 0 & 6L & 2L^2 & -6L & 4L^2 \end{bmatrix}$$
◀

(CONT.)

7.31 (CONT.)

Boundary conditions are :

$$v_2 = v_3 = v_4 = \theta_4 = 0$$

System governing relations, from . (7.40):

$$\begin{Bmatrix} -P \\ 0 \\ F_{y2} \\ M_2 \\ F_{y3} \\ M_3 \\ F_{y4} \\ M_4 \end{Bmatrix} = [K] \begin{Bmatrix} v_1 \\ \theta_1 \\ 0 \\ \theta_2 \\ 0 \\ \theta_3 \\ 0 \\ 0 \end{Bmatrix}$$



SOLUTION (7.32)

(a) Use Eq.(7.45a):

$$[k]_1 = \frac{EI}{L^3} \begin{bmatrix} v_1 & \theta_1 & v_2 & \theta_2 \\ 12 & 6L & -12 & 6L \\ 6L & 4L^2 & -6L & 2L^2 \\ -12 & -6L & 12 & -6L \\ 6L & 2L^2 & -6L & 4L^2 \end{bmatrix}$$



$$[k]_2 = \frac{EI}{L^3} \begin{bmatrix} v_2 & \theta_2 & v_3 & \theta_3 \\ 12 & 6L & -12 & 6L \\ 6L & 4L^2 & -6L & 2L^2 \\ -12 & -6L & 12 & -6L \\ 6L & 2L^2 & -6L & 4L^2 \end{bmatrix}$$



(b) Assemble the global stiffness matrix of the beam: $[K] = [k]_1 + [k]_2$. Then,

$$\begin{Bmatrix} R_1 \\ M_1 \\ R_2 \\ M_2 \\ F_{3y} \\ M_3 \end{Bmatrix} = \frac{EI}{L^3} \begin{bmatrix} 12 & 6L & -12 & 6L & 0 & 0 \\ 6L & 4L^2 & -6L & 2L^2 & 0 & 0 \\ -12 & -6L & 24 & 0 & -12 & 6L \\ 6L & 2L^2 & 0 & 8L^2 & -6L & 2L^2 \\ 0 & 0 & -12 & -6L & 12 & -6L \\ 0 & 0 & 6L & 2L^2 & -6L & 4L^2 \end{bmatrix} \begin{Bmatrix} v_1 \\ \theta_1 \\ v_2 \\ \theta_2 \\ v_2 \\ \theta_3 \end{Bmatrix}$$

(1) ◀

(CONT.)

7.32 (CONT.)

(c) The boundary conditions are $v_1 = 0$, $\theta_1 = 0$, and $v_2 = 0$. Hence

$$\begin{Bmatrix} -P \\ 0 \\ 0 \end{Bmatrix} = \frac{EI}{L^3} \begin{bmatrix} 12 & 6L & 6L \\ 6L & 4L^2 & 2L^2 \\ 6L & 2L^2 & 8L^2 \end{bmatrix} \begin{Bmatrix} v_3 \\ \theta_3 \\ \theta_2 \end{Bmatrix}$$

Solving




$$v_3 = -\frac{7PL^3}{12EI}, \quad \theta_3 = \frac{3PL^2}{4EI}, \quad \theta_2 = \frac{PL^2}{4EI}$$

(d) Introducing these equations into Eq. (1), after multiplying :

$$F_{3y} = -P, \quad M_3 = 0, \quad R_2 = \frac{5}{2}P$$

$$M_2 = -PL, \quad R_1 = -\frac{3}{2}P, \quad M_1 = \frac{1}{2}PL$$

(e)

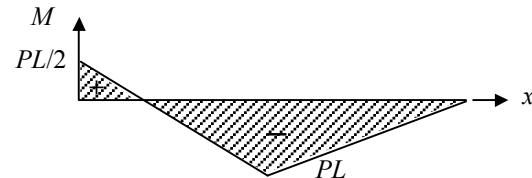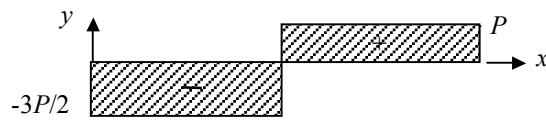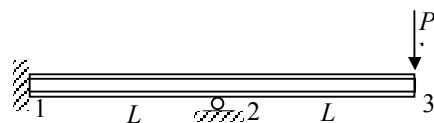

SOLUTION (7.33)

Table P7.33 Data for the truss of Fig P7.33

Element	Length(m)	θ	c	s	c^2	cs	s^2
1	7.5	36.9°	0.8	0.6	0.639	0.48	0.36
2	6	0°	1	0	1	0	0
3	4.5	90°	0	1	0	0	1
4	4.5	0°	1	0	1	0	0
5	$4.5\sqrt{2}$	135°	-0.707	0.707	0.5	-0.5	0.5

(CONT.)

7.33 (CONT.)

Apply Eq.(7.38):

$$[k]_1 = \frac{AE}{7.5} \begin{bmatrix} u_1 & v_1 & u_2 & v_2 \\ 0.639 & 0.48 & -0.639 & -0.48 \\ 0.48 & 0.361 & -0.48 & -0.361 \\ -0.639 & -0.48 & 0.639 & 0.48 \\ -0.48 & -0.361 & 0.48 & 0.361 \end{bmatrix} \begin{bmatrix} u_1 \\ v_1 \\ u_2 \\ v_2 \end{bmatrix}$$

$$[k]_2 = \frac{AE}{6.0} \begin{bmatrix} u_1 & v_1 & u_3 & v_3 \\ 1 & 0 & -1 & 0 \\ 0 & 0 & 0 & 0 \\ -1 & 0 & 1 & 0 \\ 0 & 0 & 0 & 0 \end{bmatrix} \begin{bmatrix} u_1 \\ v_1 \\ u_3 \\ v_3 \end{bmatrix}$$

$$[k]_3 = \frac{AE}{4.5} \begin{bmatrix} u_2 & v_2 & u_3 & v_3 \\ 0 & 0 & 0 & 0 \\ 0 & 1 & 0 & -1 \\ 0 & 0 & 0 & 0 \\ 0 & -1 & 0 & 1 \end{bmatrix} \begin{bmatrix} u_2 \\ v_2 \\ u_3 \\ v_3 \end{bmatrix}$$

$$[k]_4 = \frac{AE}{4.5} \begin{bmatrix} u_3 & v_3 & u_4 & v_4 \\ 1 & 0 & -1 & 0 \\ 0 & 0 & 0 & 0 \\ -1 & 0 & 1 & 0 \\ 0 & 0 & 0 & 0 \end{bmatrix} \begin{bmatrix} u_3 \\ v_3 \\ u_4 \\ v_4 \end{bmatrix}$$

$$[k]_5 = \frac{AE}{4.5\sqrt{2}} \begin{bmatrix} u_2 & v_2 & u_4 & v_4 \\ 0.5 & -0.5 & -0.5 & 0.5 \\ -0.5 & 0.5 & 0.5 & -0.5 \\ -0.5 & 0.5 & 0.5 & -0.5 \\ 0.5 & -0.5 & -0.5 & 0.5 \end{bmatrix} \begin{bmatrix} u_2 \\ v_2 \\ u_4 \\ v_4 \end{bmatrix}$$

SOLUTION (7.34)

Table P7.34 Data for the truss of Fig.P7.34

<i>Element</i>	θ	c	s	c^2	cs	s^2
1	0°	1	0	1	0	0
2	60°	0.5	0.866	0.25	0.433	0.75
3	120°	-0.5	0.866	0.25	-0.433	0.75
4	0°	1	0	1	0	0
5	60°	0.5	0.866	0.25	0.433	0.75

(a) Use Eq.(7.38):

$$[k]_1 = \frac{AE}{L} \begin{bmatrix} u_1 & v_1 & u_4 & v_4 \\ 1 & 0 & -1 & 0 \\ 0 & 0 & 0 & 0 \\ -1 & 0 & 1 & 0 \\ 0 & 0 & 0 & 0 \end{bmatrix} \begin{bmatrix} u_1 \\ v_1 \\ u_4 \\ v_4 \end{bmatrix}$$

$$[k]_2 = \frac{AE}{L} \begin{bmatrix} u_1 & v_1 & u_2 & v_2 \\ 0.25 & 0.433 & -0.25 & -0.433 \\ 0.433 & 0.75 & -0.433 & -0.75 \\ -0.25 & -0.433 & 0.25 & 0.433 \\ -0.433 & -0.75 & 0.433 & 0.75 \end{bmatrix} \begin{bmatrix} u_1 \\ v_1 \\ u_2 \\ v_2 \end{bmatrix}$$

$$[k]_3 = \frac{AE}{L} \begin{bmatrix} u_2 & v_2 & u_4 & v_4 \\ 0.25 & -0.433 & -0.25 & 0.433 \\ -0.433 & 0.75 & 0.433 & -0.75 \\ -0.25 & 0.433 & 0.25 & -0.433 \\ 0.433 & -0.75 & -0.433 & 0.75 \end{bmatrix} \begin{bmatrix} u_2 \\ v_2 \\ u_4 \\ v_4 \end{bmatrix}$$

$$[k]_4 = \frac{AE}{L} \begin{bmatrix} u_2 & v_2 & u_3 & v_3 \\ 1 & 0 & -1 & 0 \\ 0 & 0 & 0 & 0 \\ -1 & 0 & 1 & 0 \\ 0 & 0 & 0 & 0 \end{bmatrix} \begin{bmatrix} u_2 \\ v_2 \\ u_3 \\ v_3 \end{bmatrix}$$

 (CONT.)

7.34 (CONT.)

$$[k]_s = \frac{AE}{L} \begin{bmatrix} u_3 & v_3 & u_4 & v_4 \\ 0.25 & 0.433 & -0.25 & -0.433 \\ 0.433 & 0.75 & -0.433 & -0.75 \\ -0.25 & -0.433 & 0.25 & 0.433 \\ -0.433 & -0.75 & 0.433 & 0.75 \end{bmatrix} \begin{bmatrix} u_3 \\ v_3 \\ u_4 \\ v_4 \end{bmatrix}$$

(b) Global Stiffness Matrix $[K] =$

$$\frac{AE}{L} \begin{bmatrix} u_1 & v_1 & u_2 & v_2 & u_3 & v_3 & u_4 & v_4 \\ 1.25 & 0.433 & -0.25 & -0.433 & 0 & 0 & -1 & 0 \\ 0.433 & 0.75 & -0.433 & -0.75 & 0 & 0 & 0 & 0 \\ -0.25 & -0.433 & 1.5 & 0 & -1 & 0 & -0.25 & 0.433 \\ -0.433 & -0.75 & 0 & 1.5 & 0 & 0 & 0.433 & -0.75 \\ 0 & 0 & -1 & 0 & 1.25 & 0.433 & -0.25 & -0.433 \\ 0 & 0 & 0 & 0 & 0.433 & 0.75 & -0.433 & -0.75 \\ -1 & 0 & -0.25 & 0.433 & -0.25 & -0.433 & 1.5 & 0 \\ 0 & 0 & 0.433 & -0.75 & -0.433 & -0.75 & 0 & 1.5 \end{bmatrix} \begin{bmatrix} u_1 \\ v_1 \\ u_2 \\ v_2 \\ u_3 \\ v_3 \\ u_4 \\ v_4 \end{bmatrix}$$

$$\{F\} = [K]\{\delta\}; \quad \left\{ \begin{array}{l} R_{1x} \\ R_{1y} \\ 0 \\ P \\ Q \\ 0 \\ R_{4x} \\ R_{4y} \end{array} \right\} = [K] \left\{ \begin{array}{l} 0 \\ 0 \\ u_2 \\ v_2 \\ u_3 \\ v_3 \\ 0 \\ 0 \end{array} \right\}$$

SOLUTION (7.35)

We have AE=30 MN.

Table P7.35 Data for the truss of Fig.P7.35

Element	Length	θ	c	s	c^2	cs	s^2
1	5	53.13°	0.6	0.8	0.36	0.48	0.64
2	4	0°	1	0	1	0	0

(CONT.)

7.35 (CONT.)

(a) Use Eq.(7.38):

$$[k]_1 = \frac{AE}{5} \begin{bmatrix} u_1 & v_1 & u_2 & v_2 \\ 0.36 & 0.48 & -0.36 & -0.48 \\ 0.48 & 0.64 & -0.48 & -0.64 \\ -0.36 & -0.48 & 0.36 & 0.48 \\ -0.48 & -0.64 & 0.48 & 0.64 \end{bmatrix} \begin{bmatrix} u_1 \\ v_1 \\ u_2 \\ v_2 \end{bmatrix}$$

$$[k]_2 = \frac{AE}{4} \begin{bmatrix} u_2 & v_2 & u_3 & v_3 \\ 1 & 0 & -1 & 0 \\ 0 & 0 & 0 & 0 \\ -1 & 0 & 1 & 0 \\ 0 & 0 & 0 & 0 \end{bmatrix} \begin{bmatrix} u_2 \\ v_2 \\ u_3 \\ v_3 \end{bmatrix}$$

(b) Global Stiffness Matrix

$$[K] = AE \begin{bmatrix} u_1 & v_1 & u_2 & v_2 & u_3 & v_3 \\ 0.072 & 0.096 & -0.072 & -0.096 & 0 & 0 \\ 0.096 & 0.128 & -0.096 & -0.128 & 0 & 0 \\ -0.072 & -0.096 & 0.322 & 0.096 & -0.25 & 0 \\ -0.096 & -0.128 & 0.096 & 0.128 & 0 & 0 \\ 0 & 0 & -0.250 & 0 & 0.25 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 \end{bmatrix} \begin{bmatrix} u_1 \\ v_1 \\ u_2 \\ v_2 \\ u_3 \\ v_3 \end{bmatrix}$$

(c) Boundary Conditions: $u_1 = v_1 = u_3 = v_3 = 0$.

$$\begin{Bmatrix} F_{2x} \\ F_{2y} \end{Bmatrix} = AE \begin{bmatrix} 0.322 & 0.096 \\ 0.096 & 0.128 \end{bmatrix} \begin{Bmatrix} u_2 \\ v_2 \end{Bmatrix}$$

$$\begin{Bmatrix} u_2 \\ v_2 \end{Bmatrix} = \frac{1}{AE} \begin{bmatrix} 4 & -3 \\ -3 & 10.063 \end{bmatrix} \begin{Bmatrix} 0 \\ -10,000 \end{Bmatrix} = \begin{Bmatrix} 0.0010 \\ -0.0039 \end{Bmatrix} m$$

(d)

$$\begin{Bmatrix} F_{1x} \\ F_{1y} \\ F_{3x} \\ F_{3y} \end{Bmatrix} = AE \begin{bmatrix} -0.072 & -0.096 \\ -0.096 & -0.128 \\ -0.250 & 0 \\ 0 & 0 \end{bmatrix} \begin{Bmatrix} 0.0010 \\ -0.0039 \end{Bmatrix} = \begin{Bmatrix} 7632 \\ 10176 \\ -7500 \\ 0 \end{Bmatrix} N$$

(CONT.)

7.35 (CONT.)

(e) Use Eq.(7.39)

$$F_{12} = \frac{AE}{5} [0.6 \quad 0.8] \begin{Bmatrix} 0.001 \\ -0.0039 \end{Bmatrix} = -15.12 \text{ kN} \quad (C)$$

$$F_{23} = \frac{AE}{4} [1 \quad 0] \begin{Bmatrix} -0.001 \\ 0.0039 \end{Bmatrix} = -7.5 \text{ kN} \quad (C)$$

SOLUTIONS (7.36 through 7.39)

It is important to take into account any condition of symmetry which may exist. Use a two-dimensional finite element program or ANSYS.

SOLUTION (7.40)

(a) Refer to Fig. 7.25a:

$$Q_j = \frac{1}{2} p_j h_1 t + \frac{1}{3} \frac{p_m - p_j}{2} h_1 t = h_1 t \frac{(2p_j + p_m)}{6}$$

$$Q_m = \frac{1}{2} p_j h_1 t + \frac{2}{3} \frac{p_m - p_j}{2} h_1 t = h_1 t \frac{(2p_m + p_j)}{6}$$

(b) Refer to Fig. 7.25b:

$$\tau_{xy} = \frac{PQ}{It} = \frac{3P}{4th^3} (h^2 - y^2) \quad (a)$$


Substituting Eq. (a) into the given expression for Q_m :

$$\begin{aligned} Q_m &= \frac{1}{y_m - y_j} \int_{y_j}^{y_m} \frac{3P}{4h^3} (h^2 - y^2) (y - y_j) dy \\ &= \frac{1}{y_m - y_j} \frac{3P}{4h} \left[-y_j \left(y - \frac{y^3}{3h^2} \right) \Big|_{y_j}^{y_m} + \left(\frac{y^2}{2} - \frac{y^4}{4h^2} \right) \Big|_{y_j}^{y_m} \right] \end{aligned}$$

This leads to the first of Eqs. (7.79). Similarly,

$$Q_j = \int_{y_j}^{y_m} \tau_{xy} t dy - Q_m \quad (b)$$

Substituting Eq. (a) and Q_m (from the first of Eqs. 7.79), Eq. (b) leads to the second of Eqs. (7.79).

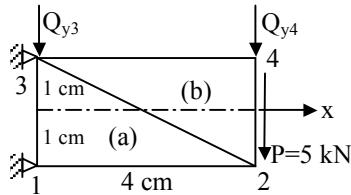SOLUTION (7.41)


Body force effects:

$$\begin{aligned}\{Q\}_a^b &= \frac{1}{3} At \{Q_{x1}, Q_{x2}, Q_{x3}, Q_{y1}, Q_{y2}, Q_{y3}\} \\ &= \frac{1}{3} (4 \times 0.3) \{0, 0, 0, -0.077, -0.077, -0.077\} N\end{aligned}$$

or

$$\{Q\}_a^b = \{0, 0, 0, 0, -0.0308, -0.0308, -0.0308, 0\} N$$

Similarly,

$$\{Q\}_b^b = \{0, 0, 0, 0, 0, -0.0308, -0.0308, -0.0308\} N$$

Hence,

$$\{Q\}^b = \{Q\}_a^b + \{Q\}_b^b$$

or

$$\{Q\}^b = \{0, 0, 0, 0, -0.0308, -0.0616, -0.0616, -0.0308\} N$$

Effect of shear force, P :

From Case Study 7.1,

$$\{Q\}^P = \{0, 0, 0, 0, -2500, -2500\} N$$

Surface traction effects, p :

Total load $(4 \times 0.3)700 = 840 N$ is equally divided between nodes 3 and 4. Thus,

$$\{Q\}^P = \{0, 0, 0, 0, 0, 0, -420, -420\} N$$

Thermal strain effects:

We have $\varepsilon_0 = 12(10^{-6})50 = 600 \mu$ and

$$\begin{aligned}[B]_a &= \frac{1}{2A} \begin{bmatrix} b_1 & b_2 & b_3 & 0 & 0 & 0 \\ 0 & 0 & 0 & a_1 & a_2 & a_3 \\ a_1 & a_2 & a_3 & b_1 & b_2 & b_3 \end{bmatrix} \\ &= \frac{1}{8} \begin{bmatrix} -2 & 2 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & -4 & 0 & 4 \\ -4 & 0 & 4 & -2 & 2 & 0 \end{bmatrix}\end{aligned}$$

Hence,

$$\{Q\}_a^t = [B]_a^T [D] \{\varepsilon_0\} (At)$$

(CONT.)

7.41 (CONT.)

$$= \frac{1}{8} \begin{bmatrix} -2 & 0 & -4 \\ 2 & 0 & 0 \\ 0 & 0 & 4 \\ 0 & -4 & -2 \\ 0 & 0 & 2 \\ 0 & 4 & 0 \end{bmatrix} \frac{2(10^7)}{0.91} \begin{bmatrix} 1 & 0.3 & 0 \\ 0.3 & 1 & 0 \\ 0 & 0 & 0.35 \end{bmatrix} \begin{Bmatrix} 600\mu \\ 600\mu \\ 0 \end{Bmatrix} \quad (1.2)$$

After multiplication, this gives

$$\{Q\}_a^t = \{-5142.85, 5142.85, 0, -10285.7, 0, 10285.7\} N$$

or

$$\{Q\}_a^t = \{-5142.85, 5142.85, 0, 0, -10285.7, 0, 10285.7, 0\} N$$

Similarly,

$$[B]_b = \frac{1}{2A} \begin{bmatrix} b_2 & b_4 & b_3 & 0 & 0 & 0 \\ 0 & 0 & 0 & a_2 & a_4 & a_3 \\ a_2 & a_4 & a_3 & b_2 & b_4 & b_3 \end{bmatrix}$$

$$= \frac{1}{8} \begin{bmatrix} 0 & 2 & -2 & 0 & 0 & 0 \\ 0 & 0 & 0 & -4 & 4 & 0 \\ -4 & 4 & 0 & 0 & 2 & -2 \end{bmatrix}$$

Thus,

$$\begin{aligned} \{Q\}^t &= [B]_a^T [D] \{\varepsilon_0\} (At) \\ &= \{0, 5142.85, -5142.85, -10285.7, 10285.7, 0\} N \end{aligned}$$

or $\{Q\}_b^t = \{0, 0, -5142.85, 5142.85, 0, -10285.7, 0, 10285.7\} N$

Hence,

$$\{Q\}^t = \{Q\}_a^t + \{Q\}_b^t$$

or $\{Q\}^t = \{-5142.85, 5142.85, -5142.85, 5142.85, -10285.7, -10285.7, 10285.7, 10285.7\} N$

The system nodal force matrix:

$$\begin{aligned} \{Q\} &= \{Q\}^b + \{Q\}^P + \{Q\}^p + \{Q\}^t \\ &= \{-5142.85, 5142.85, -5142.85, 5142.85, -10285.7, \\ &\quad -12785.76, 986.64, 7365.67\} N \end{aligned}$$

System equation:

$$\{Q\} = [K] \{0, u_2, 0, u_4, 0, v_2, 0, v_4\}$$

where

$[K]$ is given by Eq. (n) of Case Study 7.1.

(CONT.)

7.41 (CONT.)

Since we have only 4 unknown quantities u_2, u_4, v_2, v_4 (and 8 equations are available), there are redundant equations. Examination of these system of equations shows that:

$[K]$ is reduced by crossing out; row 1 and column 1 for $u_1 = 0$, row 3 and column 3 for $u_3 = 0$, row 5 and column 5 for $v_1 = 0$, row 7 and column 7 for $v_3 = 0$.
 $\{Q\}$ is reduced by crossing out $Q_{x1}, Q_{x3}, Q_{y1}, Q_{y3}$.

for

$$u_1 = u_3 = v_1 = v_3 = 0$$


Thus, from the reduced equations, we obtain

$$\begin{Bmatrix} u_2 \\ u_4 \\ v_2 \\ v_4 \end{Bmatrix} = 10^{-6} \begin{bmatrix} 0.429 & 0.180 & 0.252 & 0.247 \\ 0.180 & 0.483 & -0.256 & -0.351 \\ 0.252 & -0.256 & 1.366 & 1.373 \\ 0.247 & -0.351 & 1.373 & 1.546 \end{bmatrix} \begin{Bmatrix} 5142.85 \\ 5142.85 \\ -12785.76 \\ 7365.67 \end{Bmatrix}$$

or

$$\begin{Bmatrix} u_2 \\ u_4 \\ v_2 \\ v_4 \end{Bmatrix} = \begin{Bmatrix} 1728 \\ 4098 \\ -7302 \\ -6702 \end{Bmatrix} 10^{-6} \text{ cm}$$

SOLUTION (7.42)

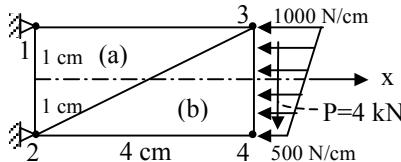

We have

$$n = \frac{2.1(10^7)}{7(10^6)} = 3$$

$$m = \frac{2.8(10^7)}{7(10^6)} = 0.4$$

$$[D] = \frac{7(10^6)}{1 - 3(0.1)^2} \begin{bmatrix} 3 & 0.3 & 0 \\ 0.3 & 1 & 0 \\ 0 & 0 & 0.39 \end{bmatrix}$$

Then

$$\begin{aligned} [D^*] &= \frac{t[D]}{4A} = \frac{(2/7)[D]}{16} \\ &= 0.13(10^6) \begin{bmatrix} 3 & 0.3 & 0 \\ 0.3 & 1 & 0 \\ 0 & 0 & 0.39 \end{bmatrix} \end{aligned} \tag{a}$$

(CONT.)

7.42 (CONT.)

Element a :

Equations (7.68), with reference to the preceding figure yield

$$\begin{aligned} a_i = a_2 &= -4 & b_i = b_2 &= 0 \\ a_j = a_3 &= 0 & b_j = b_3 &= 2 \\ a_m = a_1 &= 4 & b_m = b_1 &= -2 \end{aligned} \quad (b)$$

Substituting Eqs. (a) and (b) into Eqs. (7.54), we obtain (in 10^6):

$$k_{uu,11} = 0.13[3(4) + 0.39(16) + 0] = 2.37$$

$$k_{uu,12} = 0.13[0 + 0.39(-16) + 0] = -0.81$$

$$k_{uu,13} = 0.13[3(-4) + 0 + 0] = -1.56$$

$$k_{uu,21} = 0.13[0 + 0.39(-16) + 0] = -0.81$$

$$k_{uu,22} = 0.13[0 + 0.39(-16) + 0] = 0.81$$

$$k_{uu,23} = 0.13[0 + 0 + 0] = 0$$

$$k_{uu,31} = 0.13[3(-4) + 0 + 0] = -1.56$$

$$k_{uu,32} = 0.13[0 + 0 + 0] = 0$$

$$k_{uu,33} = 0.13[3(4) + 0 + 0] = 1.56$$

Similarly, remaining matrices are determined. Stiffness matrix for the element a (in 10^6) is:

$$[k]_a = \left[\begin{array}{ccc|ccc} 2.37 & -0.81 & -1.56 & -0.72 & 0.31 & 0.41 \\ -0.81 & 0.81 & 0 & 0.41 & 0 & -0.41 \\ -1.56 & 0 & 1.56 & 0.31 & -0.31 & 0 \\ \hline -0.72 & 0.41 & 0.31 & 2.28 & -2.08 & -0.20 \\ 0.31 & 0 & -0.31 & -2.08 & 2.08 & 0 \\ 0.41 & -0.41 & 0 & -0.20 & 0 & 0.20 \end{array} \right]$$

or

$$[k]_a = \left[\begin{array}{cccc|cccc} 2.37 & -0.81 & -1.56 & 0 & 0.72 & 0.31 & 0.41 & 0 \\ -0.81 & 0.81 & 0 & 0 & 0.41 & 0 & -0.41 & 0 \\ -1.56 & 0 & 1.56 & 0 & 0.31 & -0.31 & 0 & 0 \\ \hline 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ -0.72 & 0.41 & 0.31 & 0 & 2.28 & -2.08 & -0.20 & 0 \\ 0.31 & 0 & -0.31 & 0 & -2.08 & 2.08 & 0 & 0 \\ 0.41 & -0.41 & 0 & 0 & -0.20 & 0 & 0.20 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \end{array} \right]$$

(CONT.)

Element b:

Equations (7.68), referring to the preceding figure, now give

$$\begin{aligned} a_j &= a_2 = 0 & b_i &= b_2 = -2 \\ a_j &= a_4 = -4 & b_j &= b_4 = 2 \\ a_m &= a_3 = 4 & b_m &= b_3 = 0 \end{aligned} \quad (c)$$

Introducing Eqs. (a) and (c) into Eqs. (7.54), we obtain (in 10^6):

$$\begin{aligned} k_{uu,22} &= 0.13[3(4) + 0 + 0] = 1.56 \\ k_{uu,23} &= 0.13[0 + 0 + 0] = 0 \\ k_{uu,24} &= 0.13[3(-4) + 0 + 0] = -1.56 \end{aligned}$$

The remaining terms are obtained in a like manner. The stiffness matrix for the element *b* (in 10^6):

$$[k]_b = \left[\begin{array}{ccc|ccc} 1.56 & 0 & -1.56 & 0 & -0.31 & 0.31 \\ 0 & 0.81 & -0.81 & -0.41 & 0 & 0.41 \\ -1.56 & -0.81 & 2.37 & 0.41 & 0.31 & -0.72 \\ \hline 0 & -0.41 & 0.41 & 0.2 & 0 & -0.2 \\ -0.31 & 0 & 0.31 & 0 & 2.08 & -2.08 \\ 0.31 & 0.41 & -0.72 & -0.2 & -2.08 & 2.28 \end{array} \right]$$

or

$$[k]_b = \left[\begin{array}{cccc|cccc} 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 1.56 & 0 & -1.56 & 0 & 0 & -0.31 & 0.31 \\ 0 & 0 & 0.81 & -0.81 & 0 & -0.41 & 0 & 0.41 \\ 0 & -1.56 & -0.81 & 2.37 & 0 & 0.41 & 0.31 & -0.72 \\ \hline 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & -0.41 & 0.41 & 0 & 0.20 & 0 & -0.20 \\ 0 & -0.31 & 0 & 0.31 & 0 & 0 & 2.08 & -2.08 \\ 0 & 0.31 & 0.41 & -0.72 & 0 & -0.20 & -2.08 & 2.28 \end{array} \right]$$

The system matrix is found by addition of the matrices of the elements *a* and *b*:

$$[K] = [k]_a + [k]_b$$

That is (in 10^6),

$$[K] = \left[\begin{array}{cccc|cccc} 2.37 & -0.81 & -1.56 & 0 & -0.72 & 0.31 & 0.41 & 0 \\ -0.81 & 2.37 & 0 & -1.56 & 0.41 & 0 & 0.72 & 0.31 \\ -1.56 & 0 & 2.37 & -0.81 & 0.31 & -0.72 & 0 & 0.41 \\ 0 & -1.56 & -0.81 & 2.37 & 0 & 0.41 & 0.31 & -0.72 \\ \hline -0.72 & 0.41 & 0.31 & 0 & 2.28 & -2.08 & -0.20 & 0 \\ 0.31 & 0 & -0.72 & 0.41 & -2.08 & 2.28 & 0 & -0.20 \\ 0.41 & -0.72 & 0 & 0.31 & -0.20 & 0 & 2.28 & -2.08 \\ 0 & 0.31 & 0.41 & -0.72 & 0 & -0.20 & -2.08 & 2.28 \end{array} \right]$$

Nodal force matrix:

Equations (7.78) lead to

$$Q_j = Q_{x4} = -\frac{2[2(500)+1000]}{6} = -667 \text{ N}$$

$$Q_m = Q_{x3} = -\frac{2[2(1000)+500]}{6} = -833 \text{ N}$$

Due to the shear, we also have

$$Q_{y3} = -2000 \text{ N}, \quad Q_{y4} = -2000 \text{ N}$$

Thus,

$$\{Q\} = \{0, 0, -833, -667, 0, 0, -2000, -2000\} \text{ N}$$

Nodal displacement equation:

$$\{\delta\} = \{0, 0, u_3, u_4, 0, 0, v_3, v_4\}$$

The system equation:

The redundant equations are eliminated by crossing out the 1st, 2nd, 5th, and 6th rows and columns. This leaves

$$\begin{Bmatrix} -833 \\ -667 \\ -2000 \\ -2000 \end{Bmatrix} = 10^6 \begin{bmatrix} 2.37 & -0.81 & 0 & 0.41 \\ -0.81 & 2.37 & 0.31 & -0.72 \\ 0 & 0.31 & 2.28 & -2.08 \\ 0.41 & -0.72 & -2.08 & 2.28 \end{bmatrix} \begin{Bmatrix} u_3 \\ u_4 \\ v_3 \\ v_4 \end{Bmatrix}$$

Solving,

$$u_3 = 0.001226 \text{ cm} \quad u_4 = -0.002324 \text{ cm}$$

$$v_3 = -0.013092 \text{ cm} \quad v_4 = -0.013742 \text{ cm}$$

Stress in element a:

The strain matrix is

7.42 (CONT.)

$$\begin{aligned}
 \begin{Bmatrix} \varepsilon_x \\ \varepsilon_y \\ \gamma_{xy} \end{Bmatrix} &= \frac{1}{2A} \begin{bmatrix} b_i & b_j & b_m & 0 & 0 & 0 \\ 0 & 0 & 0 & a_i & a_j & a_m \\ a_i & a_j & a_m & b_i & b_j & b_m \end{bmatrix} \begin{Bmatrix} u_i \\ u_j \\ u_m \\ v_i \\ v_j \\ v_m \end{Bmatrix} \\
 &= \frac{10^{-6}}{8} \begin{bmatrix} 0 & 2 & -2 & 0 & 0 & 0 \\ 0 & 0 & 0 & -4 & 0 & 4 \\ -4 & 0 & 4 & 0 & 2 & -2 \end{bmatrix} \begin{Bmatrix} 0 \\ 1226 \\ 0 \\ 0 \\ -13,092 \\ 0 \end{Bmatrix} \\
 &= \begin{Bmatrix} 307 \\ 0 \\ -3273 \end{Bmatrix} \mu
 \end{aligned}$$

Then,

$$\begin{aligned}
 \begin{Bmatrix} \sigma_x \\ \sigma_y \\ \sigma_{xy} \end{Bmatrix}_a &= [D] \{ \varepsilon \}_a \\
 &= \frac{70(10^9)}{0.97} \begin{bmatrix} 3 & 0.3 & 0 \\ 0.3 & 1 & 0 \\ 0 & 0 & 0.39 \end{bmatrix} \begin{Bmatrix} 307 \\ 0 \\ -3273 \end{Bmatrix} 10^{-6} \\
 &= \{66.46, 6.65, -92.12\} MPa
 \end{aligned}$$

Stress in element *b*:

The strain matrix is

$$\begin{aligned}
 \begin{Bmatrix} \varepsilon_x \\ \varepsilon_y \\ \gamma_{xy} \end{Bmatrix}_b &= \frac{10^{-6}}{8} \begin{bmatrix} -2 & 2 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & -4 & 4 \\ 0 & -4 & 4 & -2 & 2 & 0 \end{bmatrix} \begin{Bmatrix} 0 \\ 2324 \\ -1226 \\ 0 \\ -13,742 \\ 13,092 \end{Bmatrix} \\
 &= \{-581, 325, -1661\} \mu
 \end{aligned}$$


(CONT.)

7.42 (CONT.)

$$\text{Thus, } \begin{Bmatrix} \sigma_x \\ \sigma_y \\ \tau_{xy} \end{Bmatrix}_b = \frac{70(10^3)}{0.97} \begin{bmatrix} 3 & 0.3 & -581 \\ 0.3 & 1 & 325 \\ 0 & 0 & -1661 \end{bmatrix} \begin{Bmatrix} -581 \\ 325 \\ -1661 \end{Bmatrix}$$

$$= \{-118.75, 10.88, -46.75\} \text{ MPa}$$

SOLUTION (7.43)

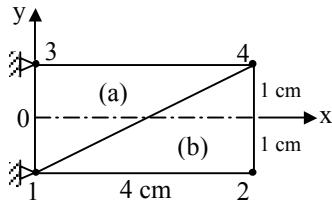

Stiffness matrix of element *a*:

Let $i = 1, j = 4, m = 3$. Then,

$$\begin{aligned} x_1 &= 0 & x_4 &= 4 & x_3 &= 0 \\ y_1 &= -1 & y_4 &= 4 & y_3 &= 1 \end{aligned}$$

Equations (7.68) give

$$\begin{aligned} a_1 &= 0 - 4 = -4 & b_1 &= 1 - 1 = 0 \\ a_4 &= 0 - 0 = 0 & b_4 &= 1 + 1 = 2 \\ a_3 &= 4 - 0 = 4 & b_3 &= -1 - 1 = -2 \end{aligned}$$

We have

$$[D^*] = \frac{10^6}{8} \begin{bmatrix} 3.33 & 0.99 & 0 \\ 0.99 & 3.3 & 0 \\ 0 & 0 & 1.16 \end{bmatrix}$$

Equations (7.76) in 10^6 are thus,

$$\begin{aligned} k_{uu,11} &= [0 + 1.16(16)]/8 = 2.32 & k_{uu,14} &= [0 + 0 + 0]/8 = 0 \\ k_{uu,13} &= [0 + 1.16(-16) + 0]/8 = -2.32 & k_{uu,44} &= [3.3(4) + 0 + 0]/8 = 1.65 \\ k_{uu,43} &= [3.3(-4) + 0 + 0]/8 = -1.65 & k_{uu,33} &= [3.3(4) + 0 + 0]/8 = 3.97 \end{aligned}$$

These can be written as follows:

$$k_{uu} = \begin{bmatrix} 2.32 & -2.32 & 0 \\ -2.32 & 3.97 & -1.65 \\ 0 & -1.65 & 1.65 \end{bmatrix} (10^6)$$

(CONT.)

7.43 (CONT.)

Similarly, we find submatrices k_{vv} and k_{uv} . In so doing and after assembling these matrices, we obtain the stiffness matrix for the element a (in 10^6):

$$[k]_a = \left[\begin{array}{ccc|ccc} 2.32 & -2.32 & 0 & 0 & 1.16 & -1.16 \\ -2.32 & 3.97 & -1.65 & 0.99 & -2.15 & 1.16 \\ 0 & -1.65 & 1.65 & -0.99 & 0.99 & 0 \\ \hline 0 & 0.99 & -0.99 & 6.6 & -6.6 & 0 \\ 1.16 & -2.15 & 0.99 & -6.6 & 7.18 & -0.58 \\ -1.16 & 1.16 & 0 & 0 & -0.58 & 0.58 \end{array} \right]$$

Stiffness matrix for element b :

Let $i = 1$, $j = 2$, $m = 4$. Then,

$$\begin{aligned} a_1 &= 4 - 4 = 0 & b_1 &= -1 - 1 = -2 \\ a_2 &= 0 - 4 = -4 & b_2 &= 1 + 1 = 2 \\ a_4 &= 4 - 0 = 4 & b_4 &= -1 + 1 = 0 \end{aligned}$$

Then, Eqs. (7.54) yield (in 10^6):

$$\begin{aligned} k_{uu,11} &= [3.3(4) + 0 + 0]/8 = 1.65 \\ k_{uu,12} &= [3.3(-4) + 0 + 0]/8 = -1.65 \\ k_{uu,14} &= [0 + 0 + 0]/8 = 0 \\ k_{uu,22} &= [3.3(4) + 1.16(16) + 0]/8 = 3.97 \\ k_{uu,24} &= [0 + 1.16(-16) + 0]/8 = -2.32 \\ k_{uu,44} &= [0 + 1.16(16) + 0]/8 = 2.32 \end{aligned}$$

or $k_{uu} = \begin{bmatrix} 1.65 & -1.65 & 0 \\ -1.65 & 3.97 & -2.32 \\ 0 & -2.32 & 2.32 \end{bmatrix} (10^6)$

Similarly, we obtain submatrices k_{vv} and k_{uv} . In so doing and after assembling these matrices, we determine the stiffness matrix for the element b (in 10^6):

$$[k]_b = \left[\begin{array}{ccc|ccc} 1.65 & -1.65 & 0 & 0 & 0.99 & -0.99 \\ -1.65 & 3.97 & -2.32 & 1.16 & -2.15 & 0.99 \\ 0 & -2.32 & 2.32 & -1.16 & 1.16 & 0 \\ \hline 0 & 1.16 & -1.16 & 0.58 & -0.58 & 0 \\ 0.99 & -2.15 & 1.16 & -0.58 & 7.18 & -6.6 \\ -0.99 & 0.99 & 0 & 0 & -6.6 & 6.6 \end{array} \right]$$

(CONT.)

7.43 (CONT.)

Prior to addition: the 2nd and 6th rows and columns of zeros are added to the matrix $[k]_a$; the 3rd and 7th rows and columns of zeros are added to the matrix $[k]_b$.

The system matrix:

$$[K] = [k]_a + [k]_b$$

is then (in 10^6):

$$[K] = \left[\begin{array}{cccc|cccc} 3.97 & -1.65 & -2.32 & 0 & 0 & 0.99 & 1.16 & -2.15 \\ -1.65 & 3.97 & 0 & -2.32 & 1.16 & -2.15 & 0 & 0.99 \\ -2.32 & 0 & 3.97 & -1.65 & 0.99 & 0 & -2.15 & 1.16 \\ 0 & -2.32 & -1.65 & 3.97 & -2.15 & 1.16 & 0.99 & 0 \\ \hline 0 & 1.16 & 0.99 & -2.15 & 7.18 & -0.58 & -6.6 & 0 \\ 0.99 & -2.15 & 0 & 1.16 & -0.58 & 7.18 & 0 & -6.6 \\ 1.66 & 0 & -2.15 & 0.99 & -6.6 & 0 & 7.18 & -0.58 \\ -2.15 & 0.99 & 1.16 & 0 & 0 & -6.6 & -0.58 & 7.18 \end{array} \right]$$

The force-displacement relation, Eq. (q) of Case Study 7.1 becomes

$$\begin{Bmatrix} 0 \\ 0 \\ -1.2 \\ -2.5 \end{Bmatrix} = \begin{Bmatrix} 3.97 & -2.32 & -2.15 & 0.99 \\ -2.32 & 3.97 & 1.16 & 0 \\ -2.15 & 1.16 & 7.18 & -6.6 \\ 0.99 & 0 & -6.6 & 7.18 \end{Bmatrix} \begin{Bmatrix} u_2 \\ u_4 \\ v_2 \\ v_4 \end{Bmatrix}$$

This yields

$$\begin{Bmatrix} u_2 \\ u_4 \\ v_2 \\ v_4 \end{Bmatrix} = 10^{-6} \begin{Bmatrix} 483.2 & 179.9 & 357.9 & 225.8 \\ 178.6 & 429 & -246.8 & 251.7 \\ 357.9 & -247 & 1546 & -1373 \\ 255.8 & -251.7 & -1373 & -1366 \end{Bmatrix} \begin{Bmatrix} 0 \\ 0 \\ -2.5 \\ -2.5 \end{Bmatrix}$$

$$= \begin{Bmatrix} -1534.35 \\ 1246.325 \\ -433 \\ 17.125 \end{Bmatrix} (10^{-6}) \text{ cm}$$

(CONT.)

7.43 (CONT.)

Stresses in element b:

$$\begin{aligned}\left\{\begin{array}{c}\varepsilon_x \\ \varepsilon_y \\ \gamma_{xy}\end{array}\right\}_b &= \frac{1}{2A} \begin{bmatrix} b_1 & b_2 & b_4 & 0 & 0 & 0 \\ 0 & 0 & 0 & a_1 & a_2 & a_4 \\ a_1 & a_2 & a_4 & b_1 & b_2 & b_4 \end{bmatrix} \begin{Bmatrix} u_1 \\ u_2 \\ u_4 \\ v_1 \\ v_2 \\ v_4 \end{Bmatrix} \\ &= \frac{10^{-6}}{8} \begin{bmatrix} -2 & 2 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & -4 & 4 \\ 0 & -4 & 4 & -2 & 2 & 0 \end{bmatrix} \begin{Bmatrix} 0 \\ -1534.35 \\ 1246.325 \\ 0 \\ -433 \\ 17.125 \end{Bmatrix} \\ &= \{-383.6, 225, 1282\} \mu\end{aligned}$$

Thus,

$$\begin{aligned}\left\{\begin{array}{c}\sigma_x \\ \sigma_y \\ \tau_{xy}\end{array}\right\}_b &= \frac{200(10^3)}{0.91} \begin{bmatrix} 1 & 0.3 & 0 \\ 0.3 & 1 & 0 \\ 0 & 0 & 0.35 \end{bmatrix} \begin{Bmatrix} -581 \\ 325 \\ -1661 \end{Bmatrix} \\ &= \{-118.75, 10.88, -46.75\} MPa\end{aligned}$$

Stresses in element a:

$$\begin{aligned}\left\{\begin{array}{c}\varepsilon_x \\ \varepsilon_y \\ \gamma_{xy}\end{array}\right\}_a &= \frac{10^{-6}}{8} \begin{bmatrix} 0 & -2 & 2 & 0 & 0 & 0 \\ 0 & 0 & 0 & -4 & 4 & 0 \\ -4 & 4 & 0 & 0 & -2 & 2 \end{bmatrix} \begin{Bmatrix} 0 \\ 0 \\ 1246.325 \\ 0 \\ 0 \\ 17.125 \end{Bmatrix} \\ &= \{311.5, 0, 4.28\} \mu\end{aligned}$$

$$\begin{aligned}\left\{\begin{array}{c}\sigma_x \\ \sigma_y \\ \tau_{xy}\end{array}\right\}_a &= \frac{200(10^3)}{0.91} \begin{bmatrix} 1 & 0.3 & 0 \\ 0.3 & 1 & 0 \\ 0 & 0 & 0.35 \end{bmatrix} \begin{Bmatrix} 311.5 \\ 0 \\ 4.28 \end{Bmatrix} \\ &= \{68.46, 20.54, 0.33\} MPa\end{aligned}$$

CHAPTER 8

SOLUTION (8.1)

(a) From Eq. (8.13), we have

$$\sigma_{\theta,\min} = \frac{a^2 p_i}{b^2 - a^2} \left(1 + \frac{b^2}{a^2}\right) = p_i \frac{2a^2}{b^2 - a^2}$$

$$\sigma_{\theta,\max} = \frac{a^2 p_i}{b^2 - a^2} \left(1 + \frac{a^2}{b^2}\right) = p_i \frac{a^2 + b^2}{b^2 - a^2}$$

Hence,

$$\frac{\sigma_{\theta,\max}}{\sigma_{\theta,\min}} = \frac{a^2 + b^2}{2a^2} = \frac{a^2 + (1.1a)^2}{2a^2} = 1.105$$



(b) Using Eq. (8.16),

$$\sigma_{\theta,\max} = -2p_0 \frac{b^2}{b^2 - a^2}$$

$$\sigma_{\theta,\min} = -p_0 \frac{a^2 + b^2}{b^2 - a^2}$$

Thus,

$$\frac{\sigma_{\theta,\max}}{\sigma_{\theta,\min}} = \frac{2b^2}{b^2 - a^2} = \frac{2(1.21a)^2}{2.21a^2} = 1.1$$



SOLUTION (8.2)

Equation (8.20):

$$\sigma_z = \frac{p_i a^2}{b^2 - a^2} = \frac{0.6^2 p_i}{1^2 - 0.6^2} = 0.5625 p_i = 140$$

or

$$p_i = 248.9 \text{ MPa}$$

Equation (8.13):

$$\sigma_{\theta,\max} = \frac{b^2 + a^2}{b^2 - a^2} p_i = \frac{1^2 + 0.6^2}{1^2 - 0.6^2} p_i = 2.12 p_i = 140$$

or

$$p_i = 65.9 \text{ MPa}$$

Equation (8.10):

$$\tau_{\max} = \frac{p_i b^2}{b^2 - a^2} = \frac{1^2}{1^2 - 0.6^2} p_i = 1.5625 p_i = 80$$

or

$$p_i = 51.2 \text{ MPa} = p_{all}$$



SOLUTION (8.3)

(a) Initial maximum tangential stress, from Eq. (8.13),

$$\sigma_{\theta} = p_i \frac{b^2 + a^2}{b^2 - a^2} = \frac{n^2 + 1}{n^2 - 1} p_i$$

or $p_i = \sigma_{\theta} \frac{n^2 - 1}{n^2 + 1}$

After boring, denoting the inner radius by r_x , we have

$$\Delta\sigma_{\theta} + \sigma_{\theta} = p_i \frac{n^2 a^2 + r_x^2}{n^2 a^2 - r_x^2} = \frac{n^2 - 1}{n^2 + 1} \sigma_{\theta} \frac{n^2 a^2 + r_x^2}{n^2 a^2 - r_x^2}$$

or $(\Delta\sigma_{\theta} + \sigma_{\theta})(n^2 + 1)(n^2 a^2 - r_x^2) = (n^2 - 1)\sigma_{\theta}(n^2 a^2 + r_x^2)$

(CONT.)

8.3 (CONT.)

$$\text{or } (\Delta\sigma_\theta + \sigma_\theta)(n^2 + 1)n^2 a^2 - (n^2 - 1)\sigma_\theta n^2 a^2 \\ = r_x^2 [(\Delta\sigma_\theta + \sigma_\theta)(n^2 + 1) + (n^2 - 1)\sigma_\theta]$$

This gives the new inner radius in the form

$$r_x = \left[\frac{2n^2 a^2 \sigma_\theta + \Delta\sigma_\theta (n^2 + 1)n^2 a^2}{\Delta\sigma_\theta (n^2 + 1) + 2\sigma_\theta n^2} \right]^{\frac{1}{2}} \quad \blacktriangleleft$$

(b)

$$r_x = \left[\frac{2(4)(0.025)^2 \sigma_\theta + 0.1\sigma_\theta (5)4(0.025)^2}{0.1\sigma_\theta (5) + 2\sigma_\theta (4)} \right]^{\frac{1}{2}} \\ = 0.02712 \text{ m} = 27.12 \text{ mm} \quad \blacktriangleleft$$

SOLUTION (8.4)

Using Eq. (8.13)


$$\sigma_{\theta,\max} = p_i \frac{a^2 + b^2}{b^2 - a^2}$$

$$\frac{280}{2} = 7 \frac{(0.6)^2 + b^2}{b^2 - (0.6)^2}$$

Solving, $b = 0.6308 \text{ m}$. Therefore,

$$t = b - a = 630.8 - 600 = 30.8 \text{ mm} \quad \blacktriangleleft$$

SOLUTION (8.5)

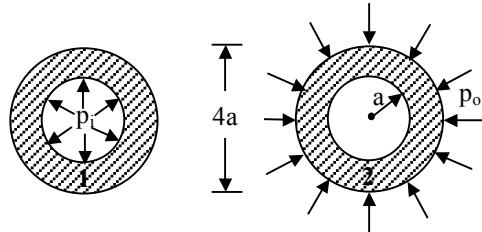

(a) Equation (8.13) and (8.16) give at $r=a$:

$$\sigma_{\theta 1} = p_i \frac{b^2 + a^2}{b^2 - a^2}, \quad \sigma_{\theta 2} = -2p_o \frac{b^2}{b^2 - a^2}$$

$$\text{Then, } |\sigma_{\theta 1}| = |\sigma_{\theta 2}|; \quad p_i \frac{b^2 + a^2}{b^2 - a^2} = 2p_o \frac{b^2}{b^2 - a^2}$$

or

$$\frac{p_i}{p_o} = \frac{2b^2}{a^2 + b^2} = \frac{2(4a^2)}{a^2 + 4a^2} = 1.6 \quad \blacktriangleleft$$

(b) By neglecting the strain ε_L in the longitudinal direction,

$$\varepsilon_{\theta 1} = \frac{1}{E} (\sigma_{\theta 1} + \nu p_i), \quad \varepsilon_{\theta 2} = \frac{1}{E} (\sigma_{\theta 2} + \nu p_o)$$

Then,

$$|\varepsilon_{\theta 1}| = |\varepsilon_{\theta 2}|$$

gives

$$\sigma_{\theta 1} + \nu p_i = \sigma_{\theta 2} - \nu p_o \quad (a)$$

But

(CONT.)

8.5(CONT.)

$$\frac{\sigma_{\theta 1}}{p_i} = \frac{a^2 + b^2}{b^2 - a^2} = \frac{a^2 + 4a^2}{4a^2 - a^2} = 1.66$$

Hence, $\sigma_{\theta 1} = 1.66 p_i$ (b)

We also have

$$\frac{\sigma_{\theta 2}}{p_o} = \frac{2b^2}{b^2 - a^2} = \frac{2(4a^2)}{4a^2 - a^2} = 2.66$$

or

$$\sigma_{\theta 2} = 2.66 p_o \quad (c)$$

Substituting Eqs. (b) and (c) into (a) and letting $\nu = 1/3$:

$$\frac{p_i}{p_o} = 1.16$$



SOLUTION (8.6)

Equation (8.14), substituting the given data yields

$$\begin{aligned} u &= \frac{ap_i}{E} \left(\frac{a^2 + b^2}{b^2 - a^2} + \nu \right) \\ &= \frac{0.6(7 \times 10^6)}{200 \times 10^9} \left(\frac{0.6^2 + 0.6308^2}{0.6308^2 - 0.6^2} + 0.3 \right) \\ &= 0.426 \text{ mm} \end{aligned}$$



SOLUTION (8.7)

(a) We have $\varepsilon_\theta = u/r$, where u is defined by Eq. (8.14). Thus, at $r=a$:

$$\varepsilon_{\theta,\max} = \frac{p_i}{E} \left[\frac{b^2 + a^2}{b^2 - a^2} + \nu \right] \quad (a)$$

(b) Introducing σ_θ , σ_r , and σ_z from Eqs. (8.12), (8.13) and (8.20) into Hooke's law

$$\varepsilon_\theta = \frac{1}{E} [\sigma_\theta - \nu(\sigma_r + \sigma_z)]$$

we have

$$\varepsilon_{\theta,\max} = \frac{p_i}{E} \left[\frac{b^2 + (1-\nu)a^2}{b^2 - a^2} + \nu \right] \quad (b)$$

Substituting the data, Eq. (a):

$$0.001 = \frac{60(10^6)}{200(10^9)} \left[\frac{4+a^2}{4-a^2} + \frac{1}{3} \right]$$

Solving, $a = 1.41 \text{ m}$. Then,

$$t = 2 - 1.41 = 0.59 \text{ m} = t_{req.}$$



Similarly, Eq. (b) yields

$$0.001 = \frac{60(10^6)}{200(10^9)} \left[\frac{4+2a^2/3}{4-a^2} + \frac{1}{3} \right]$$

or $a = 1.48 \text{ m}; \quad t = 0.52 \text{ m}$

SOLUTION (8.8)

Equation (8.13) at $r=a$:

$$\sigma_{\theta,\max} = \frac{0.25^2 + 0.05^2}{0.25^2 - 0.05^2} (60) = 65 \text{ MPa}$$

(CONT.)

8.8 (CONT.)

Equation (8.12) at r=a:

$$\sigma_{r,\max} = -p_i = -60 \text{ MPa}$$

Equation (8.10):

$$\tau_{\max} = \frac{60(0.25)^2}{0.25^2 - 0.05^2} = 62.5 \text{ MPa}$$

Equation (8.20) with $p_o = 0$:

$$\sigma_z = \frac{0.05(60)}{0.25 - 0.05^2} = 2.5 \text{ MPa}$$

Stress-strain relationship is given by

$$\varepsilon_\theta = \frac{1}{E} [\sigma_\theta - \nu(\sigma_r + \sigma_z)] = \frac{u}{r} \quad (\text{a})$$

Substituting Eqs. (8.12), (8.13), and (8.20), this expression results in at r=a:

$$u = \frac{ap_i}{E(b^2 - a^2)} [(1 - 2\nu)a^2 + (1 + \nu)b^2] \quad (\text{P8.8})$$

Introducing the given numerical values, we obtain

$$\begin{aligned} u &= \frac{0.05(60 \times 10^6)}{72 \times 10^9 (0.25^2 - 0.05^2)} [0.4(0.05)^2 + 1.3(0.25)^2] \\ &= 0.0571 \text{ mm} \end{aligned}$$

The change in the internal diameter is therefore,

$$\Delta d = 2u = 0.1142 \text{ mm}$$



SOLUTION (8.9)

Equation (8.19):

$$\sigma_{\theta,\max} = -\frac{2(0.25)^2(60)}{0.25^2 - 0.05} = -125 \text{ MPa}$$

Equation (8.15) at r=b:

$$\sigma_{r,\max} = -p_o = -60 \text{ MPa}$$

Equation (8.20) for $p_i = 0$:

$$\sigma_z = -\frac{0.25^2(60)}{0.25^2 - 0.05^2} = -62.5 \text{ MPa}$$

Equation (8.9) at r=a and $p_i = 0$:

$$\tau_{\max} = -\frac{p_o b^2}{b^2 - a^2} = -\frac{60(0.25)^2}{0.25^2 - 0.05^2} = -62.5 \text{ MPa}$$

Substitution of Eqs. (8.15), (8.16), and (8.20), into Eq. (a) of Solution of Prob. 8.8 leads to for r=a:

$$\begin{aligned} u &= -\frac{ap_o b^2}{E(b^2 - a^2)} (2 - \nu) \quad (\text{P8.9}) \\ &= -\frac{0.05(60 \times 10)(0.25^2)}{72 \times 10^9 (0.25^2 - 0.05^2)} (2 - 0.3) = -0.0738 \text{ mm} \end{aligned}$$

Thus, $\Delta d = 2u = -0.1476 \text{ mm}$



SOLUTION (8.10)

$$\text{Given: } b = 0.1 \text{ m} \quad c = 0.3 \text{ m} \quad a = 0$$

$$\delta = 0.001(0.1) = 0.0001 \text{ m}$$

Using Eq. (8.23):

(CONT.)

8.10 (CONT.)

$$p = \frac{E\delta}{b} \frac{c^2 - b^2}{2c^2} = \frac{200 \times 10^9 (0.0001)}{0.1} \frac{0.09 - 0.01}{2(0.09)}$$
$$= 88.89 \text{ MPa}$$

Then, letting $p = p_i = 88.89 \text{ MPa}$, Eq. (8.8) gives at r=b:

$$\sigma_\theta = 0 = \frac{b^2 p - c^2 p_o}{c^2 - b^2} + \frac{(p - p_o)}{c^2 - b^2}$$

After substituting the numerical values, this equation results in

$$p_o = 49.38 \text{ MPa}$$

SOLUTION (8.11)

(a) Using Eq. (8.18),

$$\frac{\sigma_{\theta,\max}}{p_i} = \frac{a^2 + b^2}{b^2 - a^2} = \frac{4}{3}$$

or $b = 2.65a$

Then, $\frac{b}{a} = \frac{a+t}{a} 2.65; \quad t = 1.65a$

Hence,

$$\frac{t}{2a} = \frac{1.6a}{2a} = 0.825$$

(b) Neglect longitudinal strain and consider

$$\sigma_r = -p_i = 6.3 \text{ MPa}$$

$$\sigma_\theta = \frac{4(6.3)}{3} = 8.4 \text{ MPa}$$

Therefore, for $a = 0.075 \text{ m}$ and $b = 2.65a$:

$$\Delta d = \varepsilon_d (2a) = \frac{2p_i a}{E} \left[\frac{a^2 + b^2}{b^2 - a^2} + \nu \right] = \frac{2(6.3 \times 10^6)(0.075)}{210(10^9)} \left[\frac{4}{3} + \frac{1}{3} \right]$$
$$= 7.4(10^{-3}) \text{ mm}$$

Alternatively, use Eq. (8.14) and let $\Delta d = 2u$.

SOLUTION (8.12)

Introducing various values of P, as given in Fig. 8.4, into Eqs. (a) and (8.21) of Sec. 8.3, it is seen that σ_θ and S values as shown in the figure are found.

For example, let $P = 1$ or $p_i = p_o$.

Then,

$$\sigma_\theta = p_i \frac{1-R^2}{R^2-1} + p_i b^2 \frac{1-1}{(R^2-1)r}; \quad \sigma_\theta = -p_i$$

And $S = \frac{\sigma_{\theta i}}{\sigma_{\theta o}} = \frac{1+0}{1+0} = 1$

or

$$\sigma_{\theta i} = \sigma_{\theta o} \quad \text{or} \quad S = 1$$

SOLUTION (8.13)

(a) For $\varepsilon_z = 0$; $[\sigma_z - \nu(\sigma_r + \sigma_\theta)]/E = 0$, using Eqs. (8.8),

(CONT.)

8.13 (CONT.)

$$\sigma_z = \nu(\sigma_r + \sigma_\theta) = \frac{2\nu(a^2 p_i - b^2 p_o)}{b^2 - a^2}$$

(b) Similarly, for $\sigma_z = 0$:

$$\varepsilon_z = -\frac{\nu}{E}(\sigma_r + \sigma_\theta) = -\frac{2\nu(a^2 p_i - b^2 p_o)}{E(b^2 - a^2)}$$

SOLUTION (8.14)

At r=a: from Eq. (8.18),

$$\sigma_{\theta,\max} = \frac{4a^2+a^2}{4a^2-a^2} p_i = \frac{5}{3} p_i$$

and from Eq. (8.12),

$$\sigma_{r,\max} = -p_i.$$

Energy of distortion theory:

$$p_i [(\frac{5}{3})^2 - (\frac{5}{3})(-1) + (-1)^2]^{\frac{1}{2}} = \sigma_{yp}$$

or $p_i = 0.429\sigma_{yp}$

Maximum shearing stress theory:

$$\frac{5}{3} p_i - (-p_i) = \sigma_{yp}$$

or $p_i = 0.375\sigma_{yp}$

SOLUTION (8.15)

We have, at r=a:

$$\sigma_{\theta,\max} = \frac{b^2+a^2}{b^2-a^2} p_i = \frac{9a^2+a^2}{9a^2-a^2} p_i = \frac{5}{4} p_i$$

$$\sigma_{r,\max} = -p_i$$

(a) $|\sigma_u| = |\frac{5}{4} p_i|$

or

$$p_i = 0.8(350) = 280 \text{ MPa}$$

And $|\sigma_u| = |p_i|, \quad p_i = 350 \text{ MPa}$

(b) Using Eq. (4.12a),

$$\frac{5p_i}{4(350)} - \frac{-p_i}{630} = 1$$

Solving,

$$p_i = 193.8 \text{ MPa}$$

SOLUTION (8.16)

From Eq. (8.18) for r=a:

$$p_i = 35 \frac{(0.25)^2 - (0.05)^2}{(0.25)^2 + (0.05)^2} = 32.31 \text{ MPa}$$

Total radial force on the contact surface is $2\pi a L p$ and total frictional force equals $2\pi a p L \mu$.

(CONT.)

8.16 (CONT.)

$$\begin{aligned}\text{Hence, Torque} &= 2\pi apL\mu(a) \\ &= 2\pi(0.05^3)(32.31 \times 10^6)(0.2) \\ &= 5.073 \text{ kN} \cdot \text{m}\end{aligned}$$

◀

SOLUTION (8.17)

Let ε_{s1} , ε_{c1} , and ε_{s2} , ε_{c2} be initial and final compressive and tensile strains in the shaft and in the cylinder, respectively.

Also, let $\sigma_{\theta 1}$, p_1 and $\sigma_{\theta 2}$, p_2 denote the initial and final maximum stresses and contact pressures, respectively. Then,

$$\varepsilon_{s1} + \varepsilon_{c1} = \varepsilon_{s2} + \varepsilon_{c2} \quad (\text{a})$$

Here,

$$\begin{aligned}\varepsilon_{s1} &= \frac{1}{E}(p_1 - vp_1) = \frac{2}{3E}p_1 \\ \varepsilon_{c1} &= \frac{1}{E}(\sigma_{\theta 1} + vp_1) = \frac{p_1}{E}(2 + \frac{1}{3}) = \frac{7}{3E}p_1 \\ \varepsilon_{s2} &= \frac{1}{E}[(p_2 - vp_2) + \frac{vp_L}{\pi a^2}] \\ &= \frac{1}{E}[p_2(1 - \frac{1}{3}) + \frac{1}{3} \frac{4.5}{\pi(0.05)^2}] \\ &= \frac{1}{E}[\frac{2}{3}p_2 + \frac{1909.86}{3}]\end{aligned}$$

From the condition of linearity,

$$\frac{\sigma_{\theta 2}}{\sigma_{\theta 1}} = \frac{p_2}{p_1}; \quad \sigma_{\theta 2} = p_2 \frac{\sigma_{\theta 1}}{p_1} = p_2 \frac{2p_1}{p_1} = 2p_2$$

$$\text{and } \varepsilon_{c2} = \frac{1}{E}(\sigma_{\theta 2} + vp_2) = \frac{1}{E}(2p_2 + vp_2) = \frac{7p_2}{3E}$$

Equation (a) is thus,

$$\frac{2p_1}{3E} + \frac{7p_1}{3E} = \frac{1}{E}(\frac{2}{3}p_2 + \frac{1909.86}{3}) + \frac{7p_2}{3E}$$

from which

$$p_1 = p_2 + 636.62$$

Hence,

$$\Delta p = p_2 - p_1 = -636.62 \text{ kPa}$$

◀

SOLUTION (8.18)

From Eq. (8.22),

$$\delta = \frac{bp}{E_b} \left(\frac{b^2 + c^2}{c^2 - b^2} + \nu_b \right) + \frac{bp}{E_s} \left(\frac{a^2 + b^2}{b^2 - a^2} - \nu_s \right)$$

$$\text{or } p = \frac{\delta}{b \left[\frac{1}{E_b} \left(\frac{c^2 + b^2}{c^2 - b^2} + \nu_b \right) + \frac{1}{E_s} \left(\frac{a^2 + b^2}{b^2 - a^2} - \nu_s \right) \right]}$$

Substituting the given data, this gives $p = 9.01 \text{ MPa}$

Stresses in the steel cylinder, using Eq. (8.16),

$$(\sigma_\theta)_{r=a} = -\frac{2(9.01 \times 10^6)(0.08)^2}{(0.08)^2 - (0.04)^2} = -24.03 \text{ MPa}$$

(CONT.)

8.18 (CONT.)

$$(\sigma_\theta)_{r=0.08} = -9.01(10^6) \frac{(0.08)^2 + (0.04)^2}{(0.08)^2 - (0.04)^2}$$
$$= -15.02 \text{ MPa}$$

Stresses in the brass cylinder, from Eq. (8.13):

$$(\sigma_\theta)_{r=0.08} = 9.01(10^6) \frac{(0.14)^2 + (0.08)^2}{(0.14)^2 - (0.08)^2}$$
$$= 17.75 \text{ MPa}$$
$$(\sigma_\theta)_{r=0.14} = \frac{2(9.01 \times 10^6)(0.08)^2}{(0.14)^2 - (0.08)^2} = 8.74 \text{ MPa}$$

SOLUTION (8.19)

(a) Using Eq. (P8.18),

$$P = \frac{(0.5/2)(10^{-3})}{0.1 \left[\frac{1}{72(10^9)} \left(\frac{0.15^2 + 0.1^2}{0.15^2 - 0.1^2} + 0.33 \right) + \frac{1 - 0.29}{200(10^9)} \right]}$$
$$= 56.49 \text{ MPa}$$

(b) From Eq. (8.14), for r=b:

$$u = \frac{2a^2 bp_l}{E(b^2 - a^2)} = \frac{2(0.1)^2 (0.15)(56.49 \times 10^6)}{72 \times 10^9 (0.15^2 - 0.1^2)}$$
$$= 0.1883 \text{ mm}$$
$$\delta = 2u = 0.3766 \text{ mm}$$

SOLUTION (8.20)

(a) Using Eq. (8.14), we have at r=a:

$$\frac{\delta_0}{a} = \frac{pa}{E(b^2 - a^2)} [(1 - \nu)a^2 + (1 + \nu)b^2]$$

from which

$$p = \frac{\delta_0 E (b^2 - a^2)}{a^2 [(1 - \nu)a^2 + (1 + \nu)b^2]} \quad (\text{P8.20})$$

(b) Substitution of Eq. (P8.20) into Eqs. (8.12) result in

$$\sigma_r = \frac{\delta_0 E}{(1 - \nu)a^2 + (1 + \nu)b^2} \left(1 - \frac{b^2}{r^2} \right)$$
$$\sigma_\theta = \frac{\delta_0 E}{(1 - \nu)a^2 + (1 + \nu)b^2} \left(1 + \frac{b^2}{r^2} \right)$$

SOLUTION (8.21)

Equation (8.14) at r=b:

$$u = \frac{\delta_0}{2} = \frac{bp}{E} \left(\frac{b^2 + c^2}{c^2 - b^2} + \nu \right) = \frac{bp}{E} \left(\frac{b^2 + 2.25b^2}{2.25b^2 - b^2} + \frac{1}{3} \right)$$

Solving, $p = \frac{E\delta_0}{5.86b}$

Then, Eq. (8.17) yields at r=b:

$$u = \frac{bp}{E} (1 - \nu) = \frac{2\delta_0}{3(5.86)} = 0.114\delta_0$$

Hence, $\Delta d = 2u = 0.23\delta_0$

SOLUTION (8.22)

(a) Initial difference in diameter:

$$\Delta = 2b(\varepsilon_1 + \varepsilon_2)$$

where,

ε_1 = tangential (comp.) strain in the shaft

ε_2 = tangential (tens.) strain in the cylinder

Thus,

$$\begin{aligned}\Delta &= \frac{2b}{E}[(p - vp) + (\sigma_{\theta,\max} + vp)] \\ &= \frac{2b}{E}[(\sigma_{\theta,\max} + p) = \frac{2b}{E}(2p + p) \\ &= \frac{6pb}{E}\end{aligned}$$

(b) Compressive (uniform) strain ε_L , due to axial load P, is

$$\varepsilon_L = \frac{P}{\pi b^2 E}$$

We now have

$$\varepsilon_1 = \frac{1}{E}(p_1 - vp_1 - \frac{vp}{\pi b^2}) \quad (\text{comp.})$$

$$\varepsilon_2 = \frac{1}{E}(\sigma_{\theta,\max} + vp_1) \quad (\text{tens.})$$

where $\sigma_{\theta,\max}$ is the increased tangential stress. Thus,

$$\Delta_1 = 2b(\varepsilon_1 + \varepsilon_2) = \frac{2b}{E}(\sigma_{\theta,\max} + p_1 - \frac{vp}{\pi b^2})$$

Based on the linearity condition:

$$\frac{\sigma_{\theta,\max}}{p_1} = \frac{\sigma_{\theta,\max}}{P} = 2$$

or

$$\sigma_{\theta,\max} = 2p_1$$

Setting $\Delta = \Delta_1$

$$\frac{6pb}{E} = \frac{2b}{E}(2p_1 + p_1 - \frac{P}{3\pi b^2})$$

or

$$P = 9\pi b^2(p_1 - p)$$



SOLUTION (8.23)

Radial strain is

$$\begin{aligned}\varepsilon &= \varepsilon_{b,comp} + \varepsilon_{s,tens.} \\ &= \frac{1}{E_b}(p - vp) + \frac{1}{E_s}(\sigma_{\theta,\max} + vp)\end{aligned}$$

We also have

$$\begin{aligned}\varepsilon &= (T_2 - T_1)(\alpha_b - \alpha_s) \\ &= \Delta T(19.5 - 11.7)10^{-6} = 7.8(10^{-6})\Delta T\end{aligned}$$

Note that from Eq. (8.18) at r=a:

$$\frac{\sigma_{\theta,\max}}{p} = \frac{4b^2 + b^2}{4b^2 - b^2} = \frac{5}{3}$$

(CONT.)

8.23 (CONT.)

Thus, $7.8(10^{-6})\Delta T = \frac{1}{E_b}(p - \frac{p}{3}) + \frac{1}{E_s}(\frac{5p}{3} + \frac{p}{3})$

or

$$p = \frac{11.7(\Delta T)E_bE_s}{(E_s+3E_b)10^6}$$

Hence,

$$\sigma_{\theta,\max} = \frac{1.95E_bE_s(T_2-T_1)}{(E_s+3E_b)10^5}$$



SOLUTION (8.24)

Axial Stress, Eq. (8.20):

$$\sigma_z = \frac{p_i a^2}{b^2 - a^2} = \frac{0.8^2 p_i}{1.2^2 - 0.8^2} = 0.8 p_i = 80, \quad p_i = 100 \text{ MPa}$$

Tangential stress, Eq. (8.13):

$$(\sigma_\theta)_{\max} = \frac{b^2 + a^2}{b^2 - a^2} p_i = \frac{1.2^2 + 0.8^2}{1.2^2 - 0.8^2} p_i = 2.6 p_i = 80, \quad p_i = 30.8 \text{ MPa}$$

Shear Stress, Eq. (8.10):

$$\tau_{\max} = \frac{p_i b^2}{b^2 - a^2} = \frac{1.2^2}{1.2^2 - 0.8^2} p_i = 1.8 p_i = 50$$

Solving

$$p_i = 27.8 \text{ MPa} = p_{all}$$



SOLUTION (8.25)

The maximum radial displacement u_{\max} occurs at the inner edge of the tank.

So, Eq. (8.14) for $r=a$, results in

$$u_{\max} = \frac{ap_i}{E} = \left(\frac{a^2 + b^2}{b^2 - a^2} + \nu \right)$$

Introducing the given data

$$u_{\max} = \frac{0.5(60 \times 10^6)}{70(10^9)} \left(\frac{0.5^2 + 0.8^2}{0.8^2 - 0.5^2} + 0.3 \right) = 1.107(10^{-3}) \text{ m} = 1.12 \text{ mm}$$



SOLUTION (8.26)

Equation (8.18) and Eq.(8.12) at $r=a$:

$$\sigma_1 = \sigma_{\theta,\max} = p_i \frac{a^2 + b^2}{b^2 - a^2} = \frac{5}{4} p_i \quad \sigma_2 = \sigma_{r,\max} = -p_i$$

(a) $\sigma_1 - \sigma_2 = \sigma_{yp}; \quad \frac{5}{4} p_i - (-p_i) = 350, \quad p_i = 155.6 \text{ MPa}$



(b) $\sigma_1^2 - \sigma_1 \sigma_2 + \sigma_2^2 = \sigma_{yp}^2$

$$p_i \left[\left(\frac{5}{4} \right)^2 - \left(\frac{5}{4} \right)(-1) + (-1)^2 \right]^{\frac{1}{2}} = 350, \quad p_i = 179.3 \text{ MPa}$$



SOLUTION (8.27)

$$\sigma_{\theta,\max} = p_i \frac{b^2+a^2}{b^2-a^2} = \frac{5}{3} p_i = \sigma_1, \quad \sigma_{r,\max} = -p_i = \sigma_2$$

(a) $\sigma_u = \left| \frac{5}{3} p_i \right|, \quad p_i = \frac{3}{5} (320) = 192 \text{ MPa}$ (governs)
and $\sigma_u = |p_i|, \quad p_i = 320 \text{ MPa}$

(b) $\frac{\sigma_1}{\sigma_u} - \frac{\sigma_2}{\sigma_u} = 1; \quad \frac{5p_i}{3(320)} - \frac{-p_i}{620} = 1$
or $p_i = 146.8 \text{ MPa}$

SOLUTION (8.28)

We have $a=20 \text{ mm}$, $b=30 \text{ mm}$, $c=60 \text{ mm}$.

Equation (8.22):

$$0.05 = \frac{30p}{210 \times 10^9} \left[\frac{60^2+30^2}{60^2-30^2} + 0.3 \right] + \frac{30p}{105 \times 10^9} \left[\frac{30^2+20^2}{30^2-20^2} - 0.3 \right], \quad p = 53.3 \text{ MPa}$$

Steel, Eq.(8.18):

$$\sigma_{\theta,\max} = p \frac{c^2+b^2}{c^2-b^2} = 53.3 \frac{60^2+30^2}{60^2-30^2} = 88.8 \text{ MPa}$$

Bronze, Eq.(8.19):

$$\sigma_{\theta,\max} = -2p \frac{b^2}{b^2-a^2} = -2(53.3) \frac{30^2}{30^2-20^2} = -191.9 \text{ MPa}$$

SOLUTION (8.29)

(a) Use Eq.(8.18) with $p_i = p$, $a = b$, $b = c$: (Fig. 8.6)

$$\sigma_{\theta,\max} = p \frac{c^2+b^2}{c^2-b^2} = 80 \text{ MPa}, \quad \frac{c^2+b^2}{c^2-b^2} = \frac{80(10^6)}{p} \quad (\text{a})$$

By Eq.(8.22), with $a = 0$, $b = 50$, $\delta = 0.06 \text{ mm}$:

$$0.06 = \frac{50p}{100 \times 10^9} \left[\frac{80 \times 10^6}{p} + 0.3 \right] + \frac{50p}{200 \times 10^9} [1 - 0.3]$$

or

$$60 \times 10^6 = 40 \times 10^6 + 0.15p + 0.175p, \quad p = 61.5 \text{ MPa}$$

(b) Equation (a) becomes

$$\frac{80}{61.5} = \frac{c^2+0.005^2}{c^2-0.005^2}, \quad c = 138 \text{ mm} \quad 2c = 276 \text{ mm}$$

SOLUTION (8.30)

Equation (8.22) with $a=0$, $b=50 \text{ mm}$, $c=140 \text{ mm}$.

$$\delta = \frac{bp}{E_c} \left[\frac{b^2+c^2}{c^2-b^2} + \nu_c \right] + \frac{bp}{E_s} [1 - \nu_s]$$

(CONT.)

8.30 (CONT.)

$$0.04 = \frac{50p}{120 \times 10^9} \left[\frac{140^2 + 50^2}{140^2 - 50^2} + 0.25 \right] + \frac{50p}{210 \times 10^9} (0.7)$$

Solving $p = 49.4 \text{ MPa}$

Shaft: $\sigma_\theta = \sigma_r = -p = -49.4 \text{ MPa}$

Cylinder:

$$\sigma_{\theta,\max} = p \frac{c^2 + b^2}{c^2 - b^2} = 49.4 \left[\frac{140^2 + 50^2}{140^2 - 50^2} \right] = 63.8 \text{ MPa}$$

$$\sigma_{r,\max} = -p = -49.4 \text{ MPa}$$

SOLUTION (8.31)

δ_o from Equation (8.22):

$$\frac{\lambda}{2} = (u_d)_{r=b} = \frac{bp}{E} \left[\frac{b^2 + c^2}{c^2 - b^2} + \nu \right] = \frac{bp}{E} \left(\frac{17}{15} + 0.3 \right) = 1.433 \frac{bp}{E}$$

or $p = \frac{E\lambda}{2.866b}$

Then, δ_i from Eq.(8.22) with $a=0$,

$$u_s = \frac{bp}{E} (1 - \nu) = \frac{0.7\lambda}{2.866} = 0.244\lambda$$

Therefore,

$$\Delta d_s = 0.489\lambda$$

SOLUTION (8.32)

We have (Fig. 8.6):

$$a = 0.05 \text{ m} \quad b = 0.1 \text{ m} \quad c = 0.15 \text{ m}$$

Maximum tangential stress occurs at $r=0.1 \text{ m}$ in gear wheel:

$$\sigma_{\max} = p \frac{c^2 + b^2}{c^2 - b^2}$$

where, p is the internal pressure exerted by the contact surfaces. Substituting the given data into this equation, we have

$$0.21 = p \frac{0.15^2 + 0.1^2}{0.15^2 - 0.1^2}$$

Solving,

$$p = 0.081 \text{ MPa} = 81 \text{ kPa}$$

This interface pressure produces the torque at the contact surface.

Area of contact is

$$2\pi bL = 2\pi(0.1)(0.1) = 0.02\pi$$

The torque transmitted is thus,

$$\begin{aligned} T &= [(0.2)(81 \times 10^3)(0.02\pi)](0.1) \\ &= 101.79 \text{ N}\cdot\text{m} \end{aligned}$$

SOLUTION (8.33)

From the torsion formula, $\tau = Tb/(\pi b^3/2)$:

$$T = \frac{\pi \tau b^3}{2} = \frac{\pi (120)b^3}{2} = 188.5b^3$$

Also, Eq.(8.35b):

$$T = 2\pi b^2 fpl = 2\pi b^2 fp(3b) = 6\pi fb^3 p$$

And

$$6\pi fb^3 p = 188.5b^3, \quad p = \frac{188.5}{6\pi(0.2)} = 50 \text{ MPa}$$

We have $E_h = E_s = E$, $\nu_h = \nu_s = \nu$, and $a=0$. Equation (8.22) becomes

$$\delta = \frac{2bpc^2}{E(c^2-b^2)} = \frac{2bp(4b^2)}{E(4b^2-b^2)} = \frac{8pb}{3E}$$

Hence

$$\delta = \frac{8(50)b}{3(200 \times 10^9)} = 0.6667(10^{-3})b$$



SOLUTION (8.34)

(a) $a=10 \text{ mm}$, $b=40 \text{ mm}$

$$F_\theta = \frac{T}{a} = \frac{120}{0.01} = 12 \text{ kN}$$

$$\text{Thus } 12(10^3) = 2\pi afpt = 2\pi(0.01)(0.16)(0.04)p \quad (\text{Eq.8.35a})$$

$$\text{or } p = 29.84 \text{ MPa}$$

Equation (8.22) gives then

$$\delta = \frac{10(29.84)}{100(10^3)} \left[\frac{50^2+10^2}{50^2-10^2} + 0.3 \right] + \frac{10(29.84)}{200 \times 10^9} (1 - 0.3) = (4.128 + 1.044)10^{-3} = 0.005 \text{ mm}$$



$$(b) \sigma_{\theta,\max} = p \frac{b^2+a^2}{b^2-a^2} = 29.84 \left[\frac{50^2+10^2}{50^2-10^2} \right] = 32.3 \text{ MPa}$$



SOLUTION (8.35)

From Eq. (8.28a),

$$\frac{\partial \sigma_r}{\partial r} = \frac{3+\nu}{8} \rho \omega^2 [b^2 + a^2 - \frac{\partial}{\partial r}(r^2) - a^2 b^2 \frac{\partial}{\partial r}(\frac{1}{r^2})] = 0$$

or

$$\frac{2a^2b^2}{r^3} - 2r = 0; \quad r = \sqrt{ab}$$



This value of r is substituted into Eq. (8.28a) to yield

$$\sigma_{r,\max} = \rho \omega^2 (b-a)^2$$

We also find from Eq. (8.28b), for $r=a$:

$$\sigma_{\theta,\max} = 2 \frac{3+\nu}{8} \rho \omega^2 (b^2 + \frac{1-\nu}{3+\nu})$$

Thus,

$$\frac{\sigma_{\theta,\max}}{\sigma_{r,\max}} = \frac{2(b^2 + \frac{1-\nu}{3+\nu} a^2)}{(b-a)^2}$$



SOLUTION (8.36)

At $r=0$: $\sigma_\theta = \sigma_r = (3+\nu)b^2 \rho \omega^2 / 8$. Thus,

$$\sigma_\theta^2 - \cancel{\sigma_r^0} + \cancel{\sigma_r^0} = \sigma_{yp}^2$$

or $\omega_{all} = \frac{1}{b} \sqrt{\frac{8\sigma_{yp}}{(3+\nu)\rho}}$

$$= \frac{1}{0.125} \left[\frac{8(260 \times 10^6)}{10(2.7 \times 10^3)/3} \right]^{\frac{1}{2}} = 3845.9 \text{ rad/sec}$$

$$= 36,726 \text{ rpm}$$

◀

(P8.36)

SOLUTION (8.37)

We have at inner edge:

$$\tau_{max} = \frac{\sigma_\theta - 0}{2} \quad \text{or} \quad \sigma_\theta = 2\sigma_\theta = 2(90) = 180 \text{ MPa}$$

Equation (8.28b) with $r = 0.03 \text{ m}$ is thus

$$180(10^6) = \frac{10/3}{8} [(0.03)^2 + (0.1) - \frac{1+1}{10/3} (0.03)^2 + (0.1)^2] (7800) \omega^2$$

from which

$$\omega = 525.8 \text{ rad/s} = 5021 \text{ rpm}$$

◀

SOLUTION (8.38)

(a) When $p = 0$, at interface,

$$u_d - u_s = 0.05(10^{-3}) \quad (\text{a})$$

Use Eq. (8.28b) with $r=a$:

$$\begin{aligned} (\sigma_\theta)_d &= \frac{\rho \omega^2}{4} [(3+\nu)b^2 + (1-\nu)a^2] \\ &= \frac{7.8(10^3)\omega^2}{4} [3.3(0.125^2) + 0.7(0.025^2)] = 101.473\omega^2 \end{aligned}$$

Radial displacement of disk (with $\sigma_r = 0$):

$$(u_d)_{r=a} = \frac{(\sigma_\theta)_d a}{E} = \frac{101.473\omega^2 a}{200(10^9)}$$

For shaft, using Eq. (8.30b) with $r=a$:

$$(\sigma_\theta)_s = \frac{3.3(0.025)^2}{8} (1 - \frac{1.9}{3.3}) 7.8(10^3) \omega^2 = 0.8531\omega^2$$

Radial displacement of shaft (with $\sigma_r = 0$):

$$(u_s)_{r=a} = \frac{(\sigma_\theta)_s a}{E} = \frac{0.8531\omega^2 (0.025)}{200(10^9)}$$

Thus, Eq. (a) gives

$$\frac{101.473\omega^2 (0.025)}{200(10^9)} - \frac{0.8531\omega^2 (0.025)}{200(10^9)} = 0.05$$

or

$$\omega = 1,933.884 \text{ rad/sec} = 19,040 \text{ rpm}$$

◀

(b) Maximum stress occurs in disk

$$(\sigma_\theta)_{max} = 101.473(1,933.884)^2 = 403 \text{ MPa}$$

◀

SOLUTION (8.39)

We have

$$a = 0.5c \quad b = 2c \quad r = \sqrt{ab} = c$$

(a) Equation (8.28a):

$$50(10^6) = \frac{3.3c^2}{8}(0.25 + 4 - 1 - \frac{1}{2})7.8(10^3)(5000 \frac{2\pi}{60})^2$$

or

$$c = 0.1587 \text{ m}$$

Thus,

$$t_r = 1.5c = 238.1 \text{ mm}$$

(b) Equation (8.28b) at $r=a$:

$$\begin{aligned}\sigma_{\theta,\max} &= \frac{3.3c^2}{8}[0.25 + 4 - \frac{1.9}{3.3}(0.25) + 4]7.8(10^3)(5000 \frac{2\pi}{60})^2 \\ &= 180.1 \text{ MPa}\end{aligned}$$

SOLUTION (8.40)

(a) Equation (8.23), with $a=0$:

$$p = \frac{210(10^9)(0.000075)}{2(0.075)} \frac{0.16-0.005625}{0.16} = 101.31 \text{ MPa}$$

Then, Eq. (8.18) gives

$$\sigma_{\theta,\max} = 101.31(10^6) \frac{0.16+0.005625}{0.16-0.005625} = 108.68 \text{ MPa}$$

(b) Applying Eq. (8.28c),

$$\begin{aligned}0.000075 &= \frac{3.3(0.7)}{8(210 \times 10^9)} [0.005625 + 0.16 - \frac{1.3}{3.3}(0.005625) \\ &\quad + \frac{1.3}{0.7}(0.16)](7.8 \times 10^3)(0.075)\omega^2\end{aligned}$$

Solving,

$$\omega = 450 \text{ rad/sec} = 4300 \text{ rpm}$$

SOLUTION (8.41)

From Eqs. (8.30a) and (8.30b), for $r=0$ and $\nu = 1/3$:

$$\sigma_{\max} = \frac{3+\nu}{8} \rho(\omega b)^2 = \frac{5}{12} \rho\nu^2$$

SOLUTION (8.42)

Apply Eq. (8.28c) with $u = 0.04 \text{ mm}$ at $r = 25 \text{ mm}$.

Substituting the given data:

$$\begin{aligned}0.04(10^{-3}) &= \frac{3.3(0.7)}{8(210 \times 10^9)} [(0.025)^2 + (0.25)^2 - \frac{1.3}{3.3}(0.025)^2 \\ &\quad + \frac{1.3}{0.7}(0.25)^2](7800)\omega^2(0.025)\end{aligned}$$

Solving,

$$\omega = 913.1 \text{ rad/s} = 8719 \text{ rpm}$$

SOLUTION (8.43)

We have

$$\frac{t_f}{t_o} = \left(\frac{b}{a}\right)^s; \quad \frac{0.125}{0.0625} = \left(\frac{0.625}{0.125}\right)^s$$

Solving, $s=0.431$. Then,

$$m_{1,2} = -\frac{0.431}{2} \pm \left[\left(\frac{0.431}{2} \right)^2 + (1 + 0.3 \times 0.431) \right]^{\frac{1}{2}}$$

or

$$m_1 = 0.869 \quad m_2 = -1.3$$

Equation (8.39) gives

$$\sigma_r = \frac{c_1}{t_1} r^{0.3} + \frac{c_2}{t_1} r^{-1.869} - 0.50169 \rho (\omega r)^2 \quad (a)$$

Given conditions are:

$$(\sigma_r)_{r=0.625} = 0, \quad (\sigma_r)_{r=0.125} = 0$$

Thus, substituting the given data into Eq. (a) and solving:

$$\frac{c_1}{t_1} = 0.2322 \rho \omega^2, \quad \frac{c_2}{t_1} = -0.0024 \rho \omega^2$$

The second of Eqs. (8.39), at the bore $r=0.125$ m, leads to

$$140(10^6) = 0.2322(0.125^{0.3})(0.869)\rho\omega^2 + (-0.0024)(-1.3)(0.125^{-1.869})\rho\omega^2 - \frac{(1+0.9)(0.125)^2}{8-(3.3)(0.431)}\rho\omega^2$$

or

$$\rho\omega^2 = 549(10^6)$$

It follows, from the second of Eqs. (8.39), that

$$\begin{aligned} (\sigma_\theta)_{r=0.625} &= [0.2322(0.625^{0.3})(0.869) \\ &\quad - 0.0024(-1.3)(0.625^{-1.869}) - \frac{1.9(0.625)^2}{8-3.3(0.431)}] (549 \times 10^6) \\ &= 37.5 \text{ MPa} \end{aligned}$$

Circumferential force is thus

$$37,500(0.0625) = 2344 \text{ kN/m}$$



SOLUTION (8.44)

(a) Uniform thickness

Centrifugal force due to the blades, $m\omega^2 r$, is

$$\frac{540}{9.81} \left(\frac{10,000\pi}{60} \right)^2 (0.575) = 8.677(10^6) \text{ N}$$

The pressure at b is then

$$p_o = \frac{8.667(10^6)}{2\pi(0.5)(0.05)} = 55.24 \text{ MPa}$$

We have

$$\rho\omega^2 = 7.8(10^{-3}) \left(\frac{10,000\pi}{60} \right)^2 = 2.1384(10^3)$$

The condition of zero pressure at the bore is satisfied by, using Eq. (8.27b):

$$(\sigma_r)_{r=a} = 0 = \frac{E}{1-\nu^2} \left[-\frac{(3+\nu)(1-\nu^2)\rho\omega^2 a^2}{8E} + (1+\nu)c_1 - (1-\nu) \frac{c_2}{a^2} \right]$$

(CONT.)

8.44 (CONT.)

$$\text{or} \quad 0 = -\frac{(3+\nu)a^2\rho\omega^2}{8} + \underbrace{\left[\frac{E(1+\nu)}{1-\nu^2} C_1\right]}_{A_1} + \underbrace{\left[-\frac{E(1-\nu)}{1-\nu^2} C_2\right] \frac{1}{a^2}}_{A_2}$$

$$0 = A_1 + A_2 \frac{1}{a^2} - \frac{(3+\nu)a^2\rho\omega^2}{8}$$

Substituting the data, we have

$$0 = A_1 + 256A_2 - 3.4456 \quad (\text{a})$$

The condition at the outer circumference is satisfied by:

$$(\sigma_r)_{r=b} = 55.24 = A_1 + \frac{A_2}{(0.5)^2} - \frac{3.3(0.5)^2(2138.4)}{8}$$

or

$$55.24 = A_1 + 4A_2 - 220.52 \quad (\text{b})$$

Solution of Eqs. (a) and (b) gives

$$A_1 = 280.08 \quad A_2 = -1.08 \quad (\text{c})$$

Equation (8.27c) is also written as follows

$$\sigma_\theta = A_1 - A_2 \frac{1}{r^2} - \frac{(1+3\nu)\rho\omega^2 r^2}{8} \quad (\text{d})$$

where A_1 and A_2 are given by (c). At $r=a$, we have from Eq. (d):

$$\begin{aligned} (\sigma_\theta)_{r=a} &= 280.08 + 276.48 - 1.98 \\ &= 554.58 \text{ MPa} = \sigma_{\max} \end{aligned}$$

Similarly, Eq. (d) gives $r=b$:

$$\begin{aligned} (\sigma_\theta)_{r=b} &= 280.08 + 4.32 - 126.97 \\ &= 157.43 \text{ MPa} \end{aligned}$$

Note that $\sigma_{r,\max}$ occurs at $r = \sqrt{ab} = 0.1768 \text{ m}$. Thus Eq. (8.27):

$$\begin{aligned} (\sigma_r)_{r=0.1768} &= -27.67 + 280 - 34.55 \\ &= 217.88 \text{ MPa} \end{aligned}$$

(b) Hyperbolic section

We have

$$\frac{0.4}{0.05} = \left(\frac{0.5}{0.0625}\right)^s; \quad s = 1$$

Then,

$$m_{1,2} = -\frac{1}{2} \pm [0.25 + 1.3]^{\frac{1}{2}}$$

or

$$m_1 = 0.745 \quad m_2 = 1.745$$

Letting

$$\frac{c_1}{t_1} = B_1 \quad \frac{c_2}{t_1} = B_2$$

Eq. (8.39) becomes then

$$\sigma_r = B_1 r^{m_1+s-1} + B_2 r^{m_2+s-1} - \frac{(3+\nu)\rho\omega^2}{8-(3+\nu)s} r^2$$

(CONT.)

8.44 (CONT.)

and $(\sigma_r)_{r=a} = 0$
 $= B_1(0.0625)^{0.745} + B_2(0.0625)^{-1.745} - 0.7021(0.0625)^2 \rho \omega^2$

or $0 = B_1 + 996.35B_2 - 0.0216\rho\omega^2$ (e)

Also

$$(\sigma_r)_{r=b} = 55.24 - B_1(0.5)^{0.745} + B_2(0.5)^{-1.745} - 0.702(0.5)^2 \rho \omega^2$$

or $55.24 = 0.55967B_1 + 3.352B_2 - 0.1755\rho\omega^2$ (f)

Substituting the given data and solving Eqs. (e) and (f):

$$B_1 = 725.4 \quad B_2 = -0.6814 \quad (g)$$

The second of Eqs. (8.33),

$$\sigma_\theta = B_1 m_1 r^{m_1+s-1} + B_2 m_2 r^{m_2+s-1} - \frac{(1+3\nu)\rho\omega^2}{8-(3+\nu)s} r^2$$

gives at $r=a$:

$$(\sigma_\theta)_{r=a} = 725.14(0.745)(0.0625)^{0.745} - 0.6814(-1.745)(0.0625)^{-1.745} - 0.4043(0.0625)^2 \rho \omega^2$$

or

$$(\sigma_\theta)_{r=a} = 215.2 \text{ MPa} = \sigma_{\max}$$



Also similarly we obtain that

$$(\sigma_\theta)_{r=b} = 110.2 \text{ MPa}$$

(c) Uniform stress

Using Eq. (8.41),

$$\frac{t_o}{t_i} = e^{-(\rho\omega^2/2\sigma)b^2}$$

where,

$$-(\rho\omega^2/2\sigma)b^2 = \frac{-7.8 \times 10^3 (523.59)^2 (0.5)^2}{2(84)} \\ = -3.182$$

Thus,

$$t_o = 0.02425 e^{-3.182} = 0.001 \text{ m} = 1 \text{ mm}$$

and

$$t = 0.02425 e^{-12.728r^2}$$



SOLUTION (8.45)

Because $u=0$ at $r=b$, set $c_2 = 0$ in Eq. (8.43). Thus, Eq. (8.43) with $c_2 = 0$, $T = \text{constant}$, and $u=0$ at $r=b$:

$$0 = c_1 b + \frac{(1+\nu)}{b} \alpha T \int_0^b r dr \quad \text{or} \quad c_1 = -\frac{(1+\nu)\alpha T}{2}$$

(CONT.)

8.45 (CONT.)

Substituting this into Eq. (d) and (e) of Sec. 8.10, we obtain

$$\sigma_r = -\frac{\alpha ET}{2} - \frac{\alpha ET}{2(1-\nu^2)} (1+\nu)^2$$

$$\sigma_\theta = \frac{\alpha ET}{2} - \alpha ET - \frac{\alpha ET}{2(1-\nu^2)} (1+\nu)^2$$

Letting $1-\nu^2 = (1+\nu)(1-\nu)$ and simplifying we obtain

$$\sigma_r = \sigma_\theta = -\frac{\alpha ET}{1-\nu}$$



SOLUTION (8.46)

We substitute the given T into Eqs. (8.44) to obtain

$$\sigma_r = \frac{\alpha E(T_a - T_b)}{2 \ln(b/a)} \left[-\ln \frac{b}{a} - \frac{a^2(r^2 - b^2)}{r^2(b^2 - a^2)} \ln \frac{b}{a} \right]$$

Then,

$$\frac{\partial \sigma_r}{\partial r} = 0 = \frac{E \alpha (T_a - T_b)}{2 \ln(b/a)} \left\{ \frac{d}{dr} \left(\ln \frac{b}{a} \right) - \frac{a^2}{b^2 - a^2} \left[1 - \frac{d}{dr} \left(\frac{b^2}{r^2} \right) \right] \ln \frac{b}{a} \right\}$$

yields, after differentiation:

$$r = ab \left(\frac{2}{b^2 - a^2} \ln \frac{b}{a} \right)^{\frac{1}{2}}$$



It is noted that, Eq. (8.53) gives the same result.

SOLUTION (8.47)

Using Eq. P8.46, we have

$$r = 0.01(0.015) \left[\frac{2 \ln(1.5)}{(0.015)^2 - (0.01)^2} \right]^{\frac{1}{2}} = 12.1 \text{ mm}$$

Equation (8.53) are therefore

$$\begin{aligned} (\sigma_r)_{r=12.1} &= \frac{10.4(10^{-6})(90 \times 10^9)(-8)}{2(0.7) \ln(1.5)} \left[-\ln \frac{15}{12.1} - \frac{100(12.1^2 - 15^2)}{12.1^2(15^2 - 10^2)} \ln(1.5) \right] \\ &= 1.319(10^7)[0.041] = 0.541 \text{ MPa} \end{aligned}$$

$$\begin{aligned} (\sigma_r)_{r=10} &= 1.319(10^7) \left[1 - \ln(1.5) - \frac{100(10^2 + 15^2)}{100(15^2 - 10^2)} \ln(1.5) \right] \\ &= 6.045 \text{ MPa} \end{aligned}$$

$$\begin{aligned} (\sigma_\theta)_{r=15} &= 1.319(10^7) \left[1 - \ln(1) - \frac{100(15^2 + 15^2)}{100(15^2 - 10^2)} \ln(1.5) \right] \\ &= -4.64 \text{ MPa} \end{aligned}$$

$$\begin{aligned} (\sigma_\theta)_{r=12.1} &= 1.319(10^7) \left[1 - \ln(\frac{15}{12.1}) - \frac{100(12.1^2 + 15^2)}{12.1^2(15^2 - 10^2)} \ln(1.5) \right] \\ &= 0.488 \text{ MPa} \end{aligned}$$

Similarly,

$$\begin{aligned} (\sigma_z)_{r=10} &= -1.319(10^7) \left[1 - 2 \ln(1.5) - \frac{2(10^2)}{15^2 - 10^2} \ln(1.5) \right] \\ &= 6.055 \text{ MPa} = \sigma_{\max} \end{aligned}$$



$$\begin{aligned} (\sigma_z)_{r=15} &= -1.319(10^7) \left[1 - 2 \ln(1) - \frac{2(10^2)}{15^2 - 10^2} \ln(1.5) \right] \\ &= -4.64 \text{ MPa} \end{aligned}$$

SOLUTION (8.48)

Introducing

$$T(r) = T_0(b - r)/b$$

into Eqs. (8.45), after integration, we obtain the following expressions for stresses


$$\sigma_r = \frac{1}{3} T_0 \left(\frac{r}{b} - 1 \right) \alpha E$$

$$\sigma_\theta = \frac{1}{3} T_0 \left(\frac{2r}{b} - 1 \right) \alpha E$$



From these we observe that, at $r=b$: the radial stress vanishes while tangential stress assumes its maximum value.

SOLUTION (8.49)

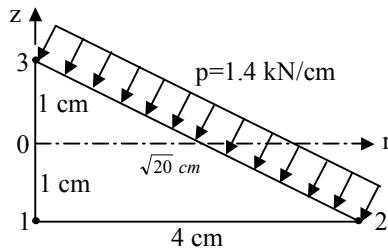

Equivalent nodal force matrix

We have

$$r_1 = 0 \quad z_1 = -1 \quad \bar{r} = 4/3$$

$$r_2 = 4 \quad z_2 = -1 \quad \bar{z} = -1/3$$

$$r_3 = 0 \quad z_3 = 1$$

Weight of the element is

$$2\pi\bar{r}A(0.077) = 2\pi(4/3)(4)(0.077) = 2.58 \text{ N}$$

Body forces:

$$\{Q\}_e = \{Q_{r1}, Q_{r2}, Q_{r3}, Q_{z1}, Q_{z2}, Q_{z3}\}$$

Therefore,

$$\{Q\}_e^b = \{0, 0, 0, -0.86, -0.86, -0.86\} \text{ N}$$

Surface forces:

$$q_2 = q_3 = \frac{1400\sqrt{20}}{2} = 3130.4 \text{ N/cm}$$

$$q_{r2} = q_{r3} = -3130.4(\frac{2}{\sqrt{20}}) = -1400 \text{ N/cm}$$

$$q_{z2} = q_{z3} = -3130.4(\frac{4}{\sqrt{20}}) = -2800 \text{ N/cm}$$

Since

$$Q_r = 2\pi\bar{r}q_r \quad Q_z = 2\pi\bar{r}q_z$$

Then,

$$Q_{r2} = Q_{r3} = -11.729 \text{ kN}$$

$$Q_{z2} = Q_{z3} = -23.457 \text{ kN}$$

(CONT.)

8.49 (CONT.)

Therefore,

$$\{Q\}_e^p = \{0, -11.729, -11.729, 0, -23.457, -23.457\} \text{ kN}$$

Thermal forces:

$$\{Q\}_e^t = 2\pi r A [\bar{B}]^T [D] [B] \{\varepsilon_0\}$$

Here,

$$[D] = 38.46(10^6) \begin{bmatrix} 0.3 & 0.7 & 0.3 & 0 \\ 0.7 & 0.3 & 0.3 & 0 \\ 0.3 & 0.3 & 0.7 & 0 \\ 0 & 0 & 0 & 0.2 \end{bmatrix}$$

We also have

$$a_i = a_1 = 4 \quad b_1 = -2$$

$$a_j = a_2 = 0 \quad b_2 = 2$$

$$a_m = a_3 = 4 \quad b_3 = 0$$

$$c_1 = -4 \quad d_1 = \frac{a_1}{r} + b_1 + \frac{c_1 \bar{r}}{r} = 2$$

$$c_2 = 0 \quad d_2 = 2$$

$$c_3 = 4 \quad d_3 = 2$$

Therefore,

$$[B] = \frac{1}{8} \begin{bmatrix} -2 & 2 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & -4 & 0 & 4 \\ 2 & 2 & 2 & 0 & 0 & 0 \\ -4 & 0 & 4 & -2 & 2 & 0 \end{bmatrix}$$

It follows that

$$\begin{aligned} \{Q\}_e^t &= 2\pi(\frac{4}{3})4[\bar{B}]^T [D] [\bar{B}] \begin{bmatrix} 0.0006 \\ 0.0006 \\ 0.0006 \\ 0 \end{bmatrix} \\ &= \{0, 502.3, 251.2, -502.3, 0, 502.3\} \text{ kN} \end{aligned}$$

Equivalent nodal force matrix is thus,

$$\{Q\}_e = \{Q\}_e^b + \{Q\}_e^p + \{Q\}_e^t$$

where $\{Q\}_e^b$, $\{Q\}_e^p$, $\{Q\}_e^t$ are already obtained.

Element stiffness matrix:

$$[k]_e = 2\pi r A [\bar{B}]^T [D] [\bar{B}] = 2\pi(\frac{4}{3})4[\bar{B}]^T [D] [\bar{B}]$$

(CONT.)

8.49 (CONT.)

Substituting the values of $[D]$ and $[\bar{B}]$, after carrying out the matrix matrix multiplications, we obtain:

$$[k]_e = \begin{bmatrix} 4.8 & 1.6 & -1.6 & 4.8 & -1.6 & -3.2 \\ 1.6 & 6.4 & 4 & -8 & 0 & 8 \\ -1.6 & 4 & 6 & -4 & 1.6 & 2.4 \\ 4.8 & -8 & -4 & 5.6 & -0.8 & -4.8 \\ -1.6 & 0 & 1.6 & -0.8 & 0.8 & 0 \\ -3.2 & 8 & 2.4 & -4.8 & 0 & 4.8 \end{bmatrix} (20.14 \times 10^6)$$

Element governing equation

$$\{Q\}_e = [k]_e \{\delta\}_e \quad (a)$$

Here,

$$\{\delta\}_e = \{u_1, u_2, u_3, w_1, w_2, w_3\}$$

When boundary conditions are given, $\{\delta\}_e$ is computed from Eq. (a), as illustrated in Chap. 7.

SOLUTION (8.50 through 8.53)

Owing to the symmetry, only any one-quarter of the cylinder need be analyzed.
Use a finite element computer program, such as ANSYS.

End of Chapter 8

CHAPTER 9

SOLUTION (9.1)

Using Eq. (9.3),

$$\begin{aligned}\beta &= \left(\frac{k}{4EI}\right)^{\frac{1}{4}} = \left[\frac{1.4(10^6)}{4(200 \times 10^9)(5.04 \times 10^{-6})}\right]^{\frac{1}{4}} \\ &= 0.7676 \text{ m}^{-1}\end{aligned}$$

Equation (9.8) yields, for $x = 0$:

$$M_{\max} = \frac{-P}{4\beta} f_3(\beta x) = -\frac{P}{4\beta} f_3(0) = -\frac{P}{4\beta}$$

Thus,

$$\begin{aligned}P &= \frac{\sigma_{\max} I (4\beta)}{c} = \frac{210 \times 10^6 (5.04 \times 10^{-6}) 4(0.7676)}{0.0635} \\ &= 51.18 \text{ kN}\end{aligned}$$



SOLUTION (9.2)

$$I = b(2.5b)^3/12 = 1.302b^4$$



$$M_{\max} = \frac{\sigma_{\max} I}{c} = \frac{250 \times 10^6 (1.302b^4)}{1.25b} = 260.4(10^6)b^3 \quad (\text{a})$$

$$\beta = \left[\frac{20(10^6)}{4(200 \times 10^9)(1.302b^4)}\right]^{\frac{1}{4}} = 0.0662/b$$

Equation (9.8):

$$M_{\max} = \frac{P}{4\beta} \quad (\text{b})$$

From Eqs. (a) and (b),

$$260.4(10^6)b^3 = \frac{40(10^3)b}{4(0.0662)}$$

or

$$b = 0.0241 \text{ m} = 24.1 \text{ mm}$$



SOLUTION (9.3)

Select a particular solution of the form

$$v_p = a \sin \frac{2\pi x}{L} \quad a = \text{const.}$$

Introduce this into Eq. (9.1),

$$\left(\frac{2\pi}{L}\right)^4 a + \frac{k}{EI} a = \frac{p_1}{EI}$$

or

$$a = \frac{p_1}{k + \frac{16\pi^4 EI}{L^4}} = \frac{p_1}{k[1+4(\pi/\beta L)^4]}$$

Thus,

$$v = \frac{p_1}{k + \frac{16\pi^4 EI}{L^4}} \sin \frac{2\pi x}{L} \quad (\text{a})$$

General solution is

$$v = e^{\beta x} [A \cos \beta x + B \sin \beta x] + e^{-\beta x} [C \cos \beta x + D \sin \beta x] + v_p$$

(CONT.)

9.3 (CONT.)

Boundary conditions are:

$$v(\infty) = 0; \quad A = B = 0$$

Loading repeats itself periodically, $p_1 \sin(2\pi x/L)$. But


$$v = e^{-\beta x} [C \cos \beta x + D \sin \beta x]$$

cannot repeat periodically and represents a damped wave. Thus, in order deflection to repeat itself with the same wave length as loading it is required that $C = D = 0$. Accordingly, solution is

$$v = v_c + v_p = 0 + v_p = v_p$$

given by Eq. (a).

SOLUTION (9.4)

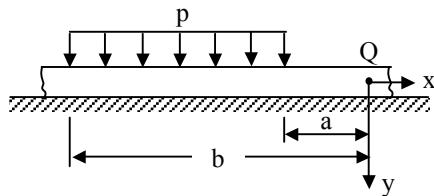

From Example 9.1:

$$\begin{aligned} v_Q &= \int_0^b \frac{pdx}{2k} \beta e^{-\beta x} [\cos \beta x + \sin \beta x] - \int_0^a \frac{pdx}{2k} \beta e^{-\beta x} [\cos \beta x + \sin \beta x] \\ &= \frac{p}{2k} [e^{-\beta x} \cos \beta a - e^{-\beta b} \cos \beta x] \end{aligned}$$

Note that, if $a=0$ and $b=L$ (large):

$$v_Q \approx \frac{p}{2k}$$

When a and b increase (large):

$$v_Q \rightarrow 0 \tag{a}$$

While according to the result of Example 9.1, when $a=0$ and $b=L$ (large):

$$v_Q \approx \frac{p}{2k}$$

When a and b increase (large):

$$v_Q \approx \frac{p}{2k} \tag{b}$$

the answers differ, as observed by comparing Eqs. (a) and (b).

SOLUTION (9.5)

Applying Eqs. (9.3) and (9.8) we obtain

$$\beta = \left[\frac{k}{4EI} \right]^{\frac{1}{4}} = \left[\frac{16.8}{4(8.437)} \right]^{\frac{1}{4}} = 0.84 \text{ m}^{-1}$$

$$\begin{aligned} v(0) &= v_{\max} = \frac{P\beta}{2k} \\ &= \frac{0.135(0.84)}{2(16.8)} = 3.375(10^{-3}) \text{ m} \end{aligned}$$



and

$$M(0) = M_{\max} = \frac{P}{4\beta} = \frac{135}{4(0.84)} = 40.179 \text{ kN} \cdot \text{m}$$



Maximum stress is therefore

$$\sigma_{\max} = \frac{M_{\max}}{S} = \frac{40.179(10^3)}{3.9(10^{-4})} = 103.02 \text{ MPa}$$



SOLUTION (9.6)

Refer to Solution of Prob. 9.1:

$$\begin{aligned}\beta &= \left(\frac{k}{4EI}\right)^{\frac{1}{4}} = \left[\frac{12(10^6)}{4(200 \times 10^9)(5.04 \times 10^{-6})}\right]^{\frac{1}{4}} \\ &= 1.3135 \text{ } m^{-1}\end{aligned}$$

Equation (9.8) gives, for $x = 0$:

$$M_{\max} = -\frac{P}{4\beta}$$

Therefore

$$\begin{aligned}P &= \frac{\sigma_{\max} I(4\beta)}{c} = \frac{(210/2.5)10^6(5.04 \times 10^{-6})4(1.3135)}{0.0635} \\ &= 35 \text{ } kN\end{aligned}$$

SOLUTION (9.7)

$$I = b^4/12$$

$$\begin{aligned}M_{\max} &= \frac{\sigma_{\max} I}{c} = \frac{(260/1.8)10^6(b^4/12)}{b/2} \\ &= 24.074(10^6)b^3\end{aligned}\tag{a}$$

$$\beta = \left[\frac{7(10^6)}{4(70 \times 10^9)(b^4/12)}\right]^{\frac{1}{4}} = 0.1316/b$$

Equation (9.8):

$$M_{\max} = \frac{P}{4\beta}\tag{b}$$

From Eqs. (a) and (b),

$$24.074(10^6)b^3 = \frac{50(10)^3 b}{4(0.1316)}$$

Solving,

$$b = 0.0628 \text{ } m = 62.8 \text{ } mm$$



SOLUTION (9.8)

We have

$$\begin{aligned}\beta &= \left[\frac{k}{4EI}\right]^{\frac{1}{4}} = \left[\frac{15}{4(8.437)}\right]^{\frac{1}{4}} = 0.8165 \text{ } m^{-1} \\ v(0) &= v_{\max} = \frac{P\beta}{2k} \\ &= \frac{0.25(0.8165)}{2(15)} = 6.8(10^{-3}) \text{ } m = 6.8 \text{ } mm\end{aligned}$$

(CONT.)

9.8 (CONT.)

And

$$M(0) = M_{\max} = \frac{P}{4\beta} = \frac{250}{4(0.8165)} = 76.55 \text{ kN}\cdot\text{m}$$

Maximum stress is thus

$$\sigma_{\max} = \frac{M_{\max}}{S} = \frac{76.55(10^3)}{3.9} = 196.3 \text{ MPa}$$



SOLUTION (9.9)

Equations (9.3) and (9.8):

$$\beta = \left[\frac{k}{4EI} \right]^{\frac{1}{4}}, \quad v_{\max} = \frac{P\beta}{2k}, \quad M_{\max} = \frac{P}{4\beta}$$

(a)

k is 1.25 times the actual value.

$$\beta \text{ changes by } \sqrt[4]{1.25} = 1.057.$$

$$v_{\max} \text{ changes by } 1.057/1.25 = 0.846.$$

$$\sigma_{\max} \text{ (or } M_{\max}) \text{ changes by } 1/1.057 = 0.946.$$

(b)

k is 1.4 times the actual value.


$$\beta \text{ changes by } \sqrt[4]{1.4} = 1.088.$$

$$v_{\max} \text{ changes by } 1.088/1.4 = 0.777.$$

$$\sigma_{\max} \text{ (or } M_{\max}) \text{ changes by } 1/1.088 = 0.919.$$

Note that stress calculation is not affected appreciably in both cases.

SOLUTION (9.10)

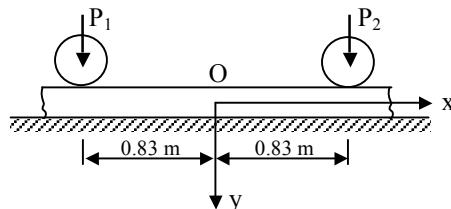

By using the principle of superposition, deflection of any point, say O, of rail is expressed as the algebraic sum of v_1 and v_2 caused by P_1 and P_2 , respectively. Thus, from Eq. (9.8), we have

$$v_0 = \frac{P_1\beta}{2k} f_1(\beta x_1) + \frac{P_2\beta}{2k} f_1(\beta x_2) \quad (\text{a})$$

where, $P_1 = P_2 = P$, $\beta = 0.84 \text{ m}^{-1}$. Then, $f_1(\beta x_1)$ and $f_1(\beta x_2)$ are found from

Table 9.1 for $x_1 = 0.83 \text{ m}$ and $x_2 = -0.83 \text{ m}$. We have $\beta x_1 = 0.697$ and

$$\beta x_2 = -0.697. \text{ Thus}$$

$$f_1(\beta x_1) = 0.702.$$

(CONT.)

9.10 (CONT.)

Since, from symmetry $f_1(\beta x_1)$ has the same value for a (+) or (-) value of βx ,
Eq. (a) may be written as

$$v_0 = \frac{P\beta}{2k} (0.702 + 0.702) = 1.404 \frac{P\beta}{2k}$$




Resultant bending moment at O, from Eq. (9.8), is

$$\begin{aligned} M_0 &= \frac{P}{4\beta} f_3(\beta x_1) + \frac{P}{4\beta} f_3(\beta x_2) \\ &= \frac{P}{4\beta} [2f_3(0.697)] = 0.125 \frac{P}{4\beta} \end{aligned}$$



It may be verified by comparing the results of Problems 9.5 and 9.7 that addition of one or more load (reduces appreciably value of maximum moment) causes a large increase in the maximum deflection of the rail.

SOLUTION (9.11)

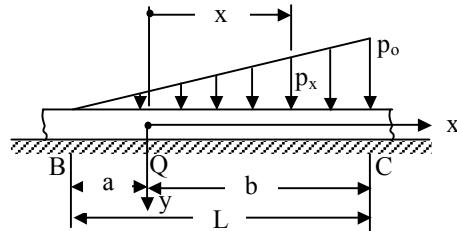

Expression for loading are:

$$p_x = \frac{p_0}{L}(a - x) \quad (\text{segment BQ})$$

$$P_x = \frac{p_0}{L}(a + x) \quad (\text{segment QC})$$

Deflection at Q is obtained by substituting ($p_x dx$) for P in Eq. (9.6). That is

$$\begin{aligned} v_Q &= \frac{p_0\beta}{2kL} \left\{ \int_0^a (a - x)e^{-\beta x} [\cos \beta x + \sin \beta x] dx \right. \\ &\quad \left. + \int_0^b (a + x)e^{\beta x} [\cos \beta x + \sin \beta x] dx \right\} \end{aligned}$$

Integrating, we have

$$v_Q = \frac{p_0}{4\beta k} [f_3(\beta a) - f_3(\beta b) - 2\beta L f_4(\beta b) + 4\beta a]$$

SOLUTION (9.12)

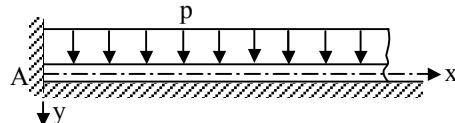


Figure (a)




Figure (b)




Figure (c)

(CONT.)

9.12 (CONT.)

Referring to Fig. (b):

$$v_{A1} = -\frac{p}{k} \quad \theta_{A1} = 0$$

Referring to Fig. (c) and using Eq. (9.12),

$$v_{A2} = \frac{2\beta}{k} [-Rf_4(0) + \beta M_0 f_3(0)]$$

$$\theta_{A2} = -\frac{2\beta^2}{k} [-Rf_1(0) + 2\beta M_0 f_4(0)]$$

The problem may be separated into two different cases both semi-infinite beams (as is seen in the figure above) provided that deflection at A is zero. Thus,

$$v_{A1} - v_{A2} = 0; \quad -\frac{p}{k} = \frac{2\beta}{k} [-R + \beta M_0]$$

$$\theta_{A1} - \theta_{A2} = 0; \quad \frac{2\beta^2}{k} [-R + 2\beta M_0]$$

solving,

$$M_0 = 2\beta^2 EI \frac{p}{k}, \quad R = 4\beta^2 EI \frac{p}{k} = \frac{p}{\beta}$$



SOLUTION (9.13)

(a) Using Eq. (9.12), $v = \frac{2\beta^2}{k} M_A f_3(\beta x)$

$$v_{\max} = \frac{2\beta^2 M_A}{k} \quad \text{at } x = 0 \quad (\text{down})$$

Scan Table 9.1, $f_3(\beta x) = -0.2079$ at $\beta x = \frac{\pi}{2}$, and

$$v_{\min} = \frac{2\beta^2}{k} M_A (-0.2079) \quad (\text{up})$$

Therefore

$$\frac{v_{\max}}{v_{\min}} = \frac{1}{-0.2079} = -4.81$$



(b) Applying Eq. (9.12), $M = M_A f_1(\beta x)$

$$v_{\max} = M_A \quad \text{at } x = 0$$


Scan Table 9.1, $f_1(\beta x) = -0.0432$ at $\beta x = \pi$, and

$$M_{\min} = -0.0432 M_A$$

$$\text{Thus } \frac{M_{\max}}{M_{\min}} = \frac{1}{-0.0432} = -23.15$$



SOLUTION (9.14)

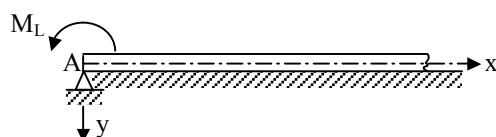

Equation (9.11) with $v(0) = 0$ gives

$$0 = 2\beta(-R_A + \beta M_L)/k$$

(CONT.)

9.14 (CONT.)

from which $R_A = M_L$. When R_A is substituted for $-P$ into Eq. (9.12):

$$v = -\frac{M_L}{2\beta^2 EI} e^{-\beta x} = -\frac{M_L}{2\beta^2 EI} f_2(\beta x)$$

Successive differentiations of this expression give:

$$v' = -\frac{M_L}{2\beta EI} f_3(\beta x)$$

$$M = \frac{M_L}{2EI} f_4(\beta x)$$

$$V = -\frac{M_L}{2EI} f_1(\beta x)$$

SOLUTION (9.15)

$$\text{We have } k = \frac{K_s}{a} = \frac{180}{0.625} = 288 \text{ kPa}$$

$$= \left[\frac{288(10^3)}{4(200 \times 10^9)(5.04 \times 10^6)} \right]^{\frac{1}{4}} = 0.51697 \text{ m}^{-1}$$

Using Eq. (9.8),

$$v(0) = v_{\max} = \frac{P\beta}{2k} = \frac{6.75(0.51697)}{2(288)} = 5.61 \text{ mm}$$

$$M(0) = M_{\max} = \frac{P}{4\beta} = \frac{6.75}{4(0.51697)} = 3.26421 \text{ kN} \cdot \text{m}$$

$$\text{Thus, } \sigma_{\max} = \frac{Mc}{I} = \frac{3264.21(0.0625)}{5.04 \times 10^{-6}} = 41.13 \text{ MPa}$$

SOLUTION (9.16)


From Eq. (9.3),

$$\beta = \left[\frac{18(10^3)}{4(0.375 \times 200 \times 10^9)(5.2 \times 10^{-7})} \right]^{\frac{1}{4}} = 0.824 \text{ m}^{-1}$$

Since $\beta L = 0.824(0.74) = 0.618 < \pi/4$ the beam can be considered rigid.

(a) Uniform deflection is

$$v = \frac{F}{3K} = \frac{540}{3(18)} = 10 \text{ mm}$$

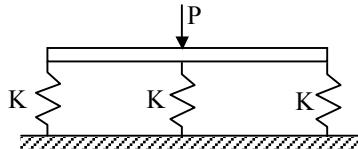

(b) We may replace the given beam by the beams shown in Figs. (a) and (b).

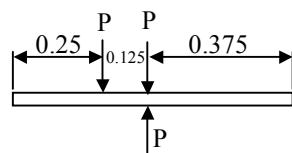


Figure (a)

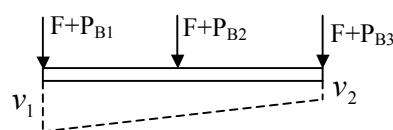


Figure (b)

(CONT.)

9.16 (CONT.)

Note that F is the direct load on each spring and P_{Bi} is the bending loads with the values:

$$F = P/3 = 540/3 = 180 \text{ N}$$

and

$$P_{Bi} = \frac{M_B r_i}{\sum r_i^2} \quad (i = 1, 2, 3)$$

Here

$$P_{B1} = \frac{540(0.125)(0.375)}{2(15 \times 0.125)^2} = 90 \text{ N}, \quad P_{B2} = 0, \quad P_{B3} = -P_{B1}$$

End deflections are thus,

$$v_1 = (180 + 90)/18 = 15 \text{ mm}$$

$$v_2 = (180 - 90)/18 = 5 \text{ mm}$$

SOLUTION (9.17)

Using Eq. (9.3),

$$\beta = \left[\frac{14}{4(8.4)} \right]^{\frac{1}{4}} = 0.8034 \text{ m}^{-1}$$


$$\beta L = 0.8034(0.6) = 0.482 \text{ rad} = 27.62^\circ$$

Hence, from Eq. (9.13):

$$v_c = \frac{4500(0.8034)}{2(14 \times 10^6)} \frac{2 + \cos 27.62^\circ + \cosh 27.62^\circ}{\sin 27.62^\circ + \sinh 27.62^\circ} \\ = 186(10^{-6}) \text{ m} = 0.186 \text{ mm}$$

Note: Slope may be found as in Prob. 9.15, with $p=0$.

SOLUTION (9.18)

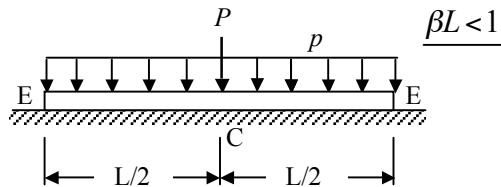

Referring to Sec. 9.8 and Table D.4

$$v_c = \frac{PL^3}{48EI} + \frac{5pL^4}{384EI} - \frac{5[(P+pL)/L]L^4}{384EI} \\ = \frac{(0.15)^3}{48(4.8 \times 10^{-6})} [9000 + \frac{5(7500 \times 0.15)}{8} - \frac{5(9000+1125)}{8}] \\ = 2.81(10^{-8}) \text{ m}$$

Similarly,

$$\theta_E = \frac{PL^2}{16EI} + \frac{pL^3}{24EI} - \frac{[(9000+1125)/0.15](0.15)^3}{24EI}$$

Substituting the given data,

$$\theta_E = 5(10^{-7}) \text{ rad}$$

SOLUTION (9.19)

Equation (9.3),

$$\beta = \left[\frac{k}{4EI} \right]^{\frac{1}{4}} = \left[\frac{8}{4(10)} \right]^{\frac{1}{4}} = 0.6687 \text{ m}^{-1}$$

$$\beta L = 0.6687(0.8) = 0.535 \text{ rad} = 30.65^\circ$$

From Eq. (9.13):

$$\begin{aligned} v_c &= \frac{15(10^3)(0.6687)}{2(8 \times 10^6)} \frac{2 + \cos 30.65^\circ + \cosh 0.535}{\sin 30.65^\circ + \sinh 0.535} \\ &= 629.9[18.4208](10^{-6}) \\ &= 5,279(10^{-6}) \text{ m} = 5.28 \text{ mm} \end{aligned}$$



SOLUTION (9.20)

Refer to Sec. 9.8 and Table D.4, we have $I = bh^3/12 = 46.8(10^{-6}) \text{ m}^4$, $EI = 3.4 \text{ MN} \cdot \text{m}^2$, and $\beta L < 1$.

$$\begin{aligned} v_c &= \frac{PL^3}{48EI} + \frac{5pL^4}{384EI} - \frac{5[(P + pL)/L]L^4}{384EI} \\ &= \frac{(0.4)^3}{48(3.4 \times 10^6)} [8000 + \frac{5(7000 \times 0.4)}{8} - \frac{5(8000 + 2800)}{8}] \\ &= 0.00276(10^{-3}) \text{ m} = 2.8 \text{ mm} \end{aligned}$$

Likewise,

$$\begin{aligned} \theta_E &= \frac{PL^2}{16EI} + \frac{pL^3}{24EI} - \frac{[(8000 + 2800)/0.4](0.4)^3}{24EI} \\ &= \frac{(0.4)^2}{16(3.4 \times 10^6)} [8000 + \frac{7000(0.4)}{3/2} - \frac{10,800}{3/2}] \\ &= 0.29(10^{-3}) \text{ rad} \end{aligned}$$

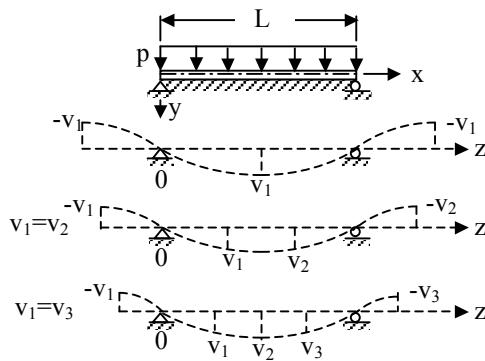
SOLUTION (9.21)


Figure (a)

Figure (b)

Figure (c)

Figure (d)

Boundary conditions are:

$$v(0) = v(L) = 0, \quad v''(0) = v''(L) = 0$$

(a)

(CONT.)

9.21 (CONT.)

These are transformed into the following central difference conditions by using Eq. (7.4) and (7.7):

$$v_0 = 0, \quad -v_{-1} = v_1, \quad v_n = 0, \quad v_{n-1} = -v_{n+1} \quad (b)$$

For m=2 (Fig. b):

$$v_{n-2} - 4v_{n-1} + 6\left(\frac{m^4+1}{m^4}\right)v_n - 4v_{n+1} + v_{n+2} = \frac{1.6}{m^4}$$

or

$$-v_1 + 6\frac{2^4+1}{2^4}v_1 - v_1 = \frac{1.6}{2^4}; \quad v_1 = 21.4 \text{ mm}$$



For m=3 (Fig. c):

$$-4v_1 + 6\frac{3^4+1}{3^4}v_2 - v_2 = \frac{1.6}{3^4}$$

$$-v_1 + 6\frac{3^4+1}{3^4}v_1 - 4v_2 = \frac{1.6}{3^4}$$

Solving,

$$v_1 = v_2 = 17.2 \text{ mm}$$



For m=4 (Fig. d):

$$-v_1 + 6\frac{4^4+1}{4^4}v_1 - 4v_1 + v_1 = \frac{1.6}{4^4}$$

$$-4v_1 + 6\frac{4^4+1}{4^4}v_2 - 4v_1 = \frac{1.6}{4^4}$$

Solving,

$$v_3 = v_1 = 10.2 \text{ mm}$$



$$v_2 = 13.9 \text{ mm}$$



SOLUTION (9.22)

From Example 9.1:

$$v_p = \frac{p}{2k}(2 - e^{-\beta a} \cos \beta a - e^{-\beta b} \cos \beta b)$$

$$\text{where } k = \frac{48EI}{al^3}$$

$$\text{Thus, } v_p = \frac{paL_t^3}{2(48)EI}[2 - e^{-\beta a} \cos \beta a - e^{-\beta b} \cos \beta b]$$

$$= \frac{paL_t^3}{96EI}[2 - f_4(\beta a) - f_4(\beta b)]$$

$$\text{We have } \beta = 3.936/6 = 0.656 \text{ m}^{-1}$$

At midspan, we have $\beta a = \beta b$ and $f_4(\beta a) \approx 0$

$$\text{Thus, } v_p = \frac{paL_t^3}{48EI}$$

$$\text{Since, } v_m = \frac{paL_t^3}{48EI} = \frac{R_{cc}L_t^3}{48EI}$$


Solving,

$$R_{cc} = ap = 0.3p$$



CHAPTER 10

SOLUTION (10.1)

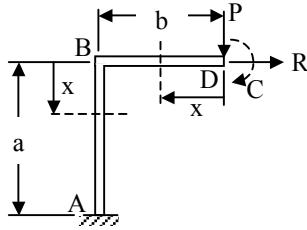

Deflections at point D:

We write

$$M_{DB} = Px \quad M_{BA} = Pb + Rx$$

Using Eq. (10.5),

$$\begin{aligned} U_{DB} &= \int_0^b \left[\frac{(Px)^2}{2EI} + \frac{R^2}{2AE} \right] dx = \frac{P^2 b^3}{6EI} + \frac{R^2 b}{2AE} \\ U_{BA} &= \int_0^a \left[\frac{(Pb+Rx)^2}{2EI} + \frac{P^2}{2AE} \right] dx \\ &= \frac{1}{2EI} \left[P^2 ab^2 + PRa^2 b + \frac{1}{3} R^2 a^3 \right] + \frac{P^2 a}{2AE} \end{aligned}$$

Total strain energy $U = U_{BD} + U_{BA}$. Vertical deflection at D is thus

$$\delta_v = \frac{\partial U}{\partial P} = \frac{1}{EI} \left[\frac{Ra^2 b}{2} + P(ab^2 + \frac{b^3}{3}) \right] + \frac{Pa}{AE}$$

Horizontal deflection at D:

$$\delta_h = \frac{\partial U}{\partial R} = \frac{1}{EI} \left[\frac{Ra^2 b}{2} + \frac{Ra^3}{3} \right] + \frac{Rb}{AE}$$

Angular rotation of D:

Introduce a couple moment C at D as shown in the figure. Then,

$$M_{DB} = Px + C \quad M_{BA} = Pb + Rx + C$$

and

$$\begin{aligned} U_{DB} &= \int_0^b \left[\frac{(Px+C)^2}{2EI} + \frac{R^2}{2AE} \right] dx \\ &= \frac{1}{2EI} \left[\frac{P^2 b^3}{3} + C^2 b + PCb^2 \right] + \frac{R^2 b}{2AE} \\ U_{BA} &= \frac{1}{2EI} \int_0^a \left[Pb + Rx + C \right]^2 dx + \frac{R^2 b}{2AE} \\ &= \frac{1}{2EI} \left[P^2 ab^2 + \frac{R^2 a^3}{3} + Ca^2 + PRa^2 b + 2PCab + CRa^2 \right] + \frac{P^2 a}{2AE} \end{aligned}$$

Hence,

$$\theta_D = \frac{\partial U}{\partial C} \Big|_{C=0} = \frac{1}{2EI} [Pb^2 + 2Pab + Ra^2]$$

Note that displacements of a simple (straight) cantilever beam may be readily found by setting $b=0$ in the foregoing results.

SOLUTION (10.2)

Equations of statics are applied to obtain the reactions:

$$\begin{aligned}\sum F_x &= 0 : \quad R_{Ax} = 0 \\ \sum M_x &= 0 : \quad R_C = \frac{1}{4}P_1 + \frac{1}{2}P_2 + \frac{3}{4}P_3 \\ \sum M_C &= 0 : \quad R_{Ay} = \frac{3}{4}P_1 + \frac{1}{2}P_2 + \frac{1}{4}P_3\end{aligned}$$

The axial force in each member is obtained by applying the method sections, as required. The results are as follows:

$$\begin{aligned}N_{DC} &= \frac{\sqrt{2}}{4}P_1 + \frac{\sqrt{2}}{2}P_2 + \frac{3\sqrt{2}}{4}P_3 \\ N_{AE} &= \frac{3\sqrt{2}}{4}P_1 + \frac{\sqrt{2}}{2}P_2 + \frac{\sqrt{2}}{4}P_3 \\ N_{DE} &= \frac{1}{2}P_1 + P_2 + \frac{1}{2}P_3 \\ N_{BE} &= -\frac{\sqrt{2}}{4}P_1 + \frac{\sqrt{2}}{2}P_2 + \frac{\sqrt{2}}{4}P_3 \\ N_{BD} &= \frac{\sqrt{2}}{4}P_1 + \frac{\sqrt{2}}{2}P_2 - \frac{\sqrt{2}}{4}P_3 \\ N_{AB} &= \frac{3}{4}P_1 + \frac{1}{2}P_2 + \frac{1}{4}P_3 \\ N_{BC} &= \frac{1}{4}P_1 + \frac{1}{2}P_2 + \frac{3}{4}P_3\end{aligned}$$

Numerical results are determined for $P_1 = P_2 = P_3 = 45 \text{ kN}$ and $L = 3 \text{ m}$.

These are tabulated below.

Bar	Axial force (kN)	$\partial N / \partial P_2$	Length (m)
DC	$N_{DC} = 99.5$	$\sqrt{2}/2$	2.125
AE	$N_{AE} = 99.5$	$\sqrt{2}/2$	2.125
DE	$N_{DE} = 90$	1	3.000
BE	$N_{BE} = 31.8$	$\sqrt{2}/2$	2.125
BD	$N_{BD} = 31.8$	$\sqrt{2}/2$	2.125
AB	$N_{AB} = 67.5$	$1/2$	3.000
BC	$N_{BC} = 67.5$	$1/2$	3.000

Thus, the vertical deflection at B:

$$\begin{aligned}\delta_B &= \frac{1}{AE} \sum_{j=1}^7 N_j \frac{\partial N_j}{\partial P_2} L_j \\ &= \frac{10^3}{AE} [2(67.5)(0.5)(3) + 2(31.8)(0.707)(2.125) + 90(1)(3) + \\ &\quad 2(99.5)(0.707)2.125] \\ &= 686,773.675/AE \text{ m}\end{aligned}$$

◀

SOLUTION (10.3)

The moment is expressed by

$$M = P(2a - x); \quad \partial M / \partial P = 2a - x$$

Castiglano's theorem gives then


$$v_P = \int \frac{M}{EI} \frac{\partial M}{\partial P} dx = \int_0^a \frac{P}{E} (2a - x)^2 (c_1 x + c_2) dx + \int_0^{2a} \frac{P}{EI_2} (2a - x)^2 dx$$

or

$$v_P = \frac{11Pc_1 a^4}{12E} + \frac{7Pc_2 a^3}{3E} + \frac{Pa^3}{3EI_2}$$



SOLUTION (10.4)

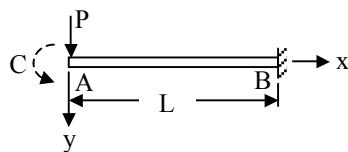

Deflection at A (with $M = Px$):

$$v_A = \frac{1}{EI} \int M \frac{\partial M}{\partial P} dx = \frac{1}{EI} \int_0^L Px(x) dx$$

$$v_A = \frac{PL^3}{3EI}$$



Slope at A (with $M = Px + C$):


$$\theta_A = \frac{1}{EI} \int M \frac{\partial M}{\partial C} dx = \frac{1}{EI} \int_0^L (Px + C)(1) dx$$

Setting $C = 0$ and integrating

$$\theta_A = \frac{PL^2}{2EI}$$



SOLUTION (10.5)

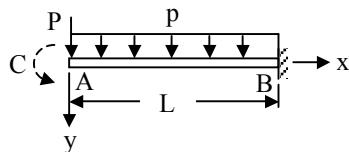

Deflection at A (with $M = Px + \frac{1}{2} px^2$):

$$\delta_A = \frac{1}{EI} \int M \frac{\partial M}{\partial P} dx = \frac{1}{EI} \int_0^L (Px + \frac{1}{2} px^2)(x) dx$$

$$= \frac{PL^3}{3EI} + \frac{PL^4}{8EI}$$



Slope at A (with $M = Px + \frac{1}{2} px^2 + C$):


$$\theta_A = \frac{1}{EI} \int M \frac{\partial M}{\partial C} dx = \frac{1}{EI} \int_0^L (Px + \frac{1}{2} px^2 + C) dx$$

Setting $C = 0$ and integrating

$$\theta_A = \frac{PL^2}{2EI} + \frac{PL^3}{6EI}$$



SOLUTION (10.6)

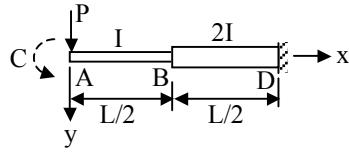

Deflection at A (with $M = Px$):

$$\delta_A = \frac{1}{EI} \int M \frac{\partial M}{\partial P} dx = \frac{1}{EI} \int_0^{L/2} (Px)(x) dx + \frac{1}{2EI} \int_{L/2}^L (Px)(x) dx$$

Integrating,

$$\delta_A = \frac{PL^3}{24EI} + \frac{7PL^3}{48EI} = \frac{3PL^3}{16EI}$$

Slope at A (with $M = Px + C$):


$$\theta_A = \frac{1}{EI} \int M \frac{\partial M}{\partial C} dx = \frac{1}{EI} \int_0^{L/2} (Px + C)(1) dx + \frac{1}{2EI} \int_{L/2}^L (Px + C) dx$$

Setting $C = 0$ and integrating

$$\theta_A = \frac{PL^2}{8EI} + \frac{3PL^2}{16EI}$$

or $\theta_A = \frac{5PL^2}{16EI}$

SOLUTION (10.7)

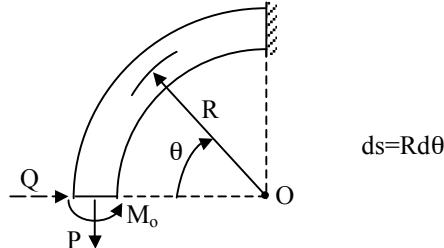

(a) Horizontal deflection

$$M_\theta = PR(1 - \cos \theta) + QR \sin \theta + M_0$$

and $\delta_h = \frac{1}{EI} \int M_\theta \frac{\partial M_\theta}{\partial Q} ds$

$$= \frac{1}{EI} \int_0^{\pi/2} [PR^3(1 - \cos \theta) \sin \theta + QR^3 \sin^2 \theta + M_0 R^2 \sin \theta] d\theta$$

$$= \frac{R^2}{2EI} \left(\frac{1}{2} PR + M_0 \right)$$

Vertical deflection ($Q=0$)

$$\delta_v = \frac{1}{EI} \int M_\theta \frac{\partial M_\theta}{\partial P} ds$$

$$= \frac{1}{EI} \int_0^{\pi/2} [PR^3(1 - \cos \theta)^2 + MR^2(1 - \cos \theta)] d\theta$$

$$= \frac{R^2}{4EI} [PR(3\pi - 8) + 2M_0(\pi - 2)]$$

(b) Rotation of the free end ($Q=0$)

$$\theta = \frac{1}{EI} \int M_\theta \frac{\partial M_\theta}{\partial M_0} ds = \frac{1}{EI} \int_0^{\pi/2} [PR(1 - \cos \theta) + M_0] d\theta$$

$$= \frac{R}{2EI} [PR(\pi - 2) + \pi M_0]$$

SOLUTION (10.8)

We now have

$$M = -FR \sin \theta, \quad N = F \sin \theta, \quad V = -F \cos \theta$$

Applying Eq. (10.6), with $\alpha = 6/5$ and $T = 0$:

$$\delta_h = \frac{R^3}{EI} \int_0^\pi F \sin^2 \theta d\theta + \frac{R}{EA} \int_0^\pi F \sin^2 \theta d\theta + \frac{6R}{5AG} \int_0^\pi F \cos^2 \theta d\theta$$

Integrating,

$$\delta_h = \frac{\pi FR^3}{2EI} + \frac{\pi FR}{2EA} + \frac{3\pi FR}{5AG}$$

Substituting the given data:

$$\begin{aligned} \delta_h &= \frac{\pi(4000)(0.05)^3}{400(6.67)} + \frac{\pi(4000)(0.05)}{400(10^5)2} + \frac{3\pi(4000)(0.05)}{5(80 \times 10^5)2} \\ &= (0.59 + 0.008 + 0.02)10^{-3} \\ &= 0.62 \text{ mm} \end{aligned}$$

The error, if N and V are omitted, is 4.5 %.

SOLUTION (10.9)

Introducing a rightward horizontal force Q at point D, we write

$$M_1 = -Qx \quad 0 \leq x \leq a$$

$$M_2 = -\frac{1}{2}Fx - Qa \quad 0 \leq x \leq \frac{b}{2}$$

$$M_3 = -\frac{1}{2}Fx - Qa + F(x - \frac{b}{2}) \quad \frac{b}{2} \leq x \leq b$$


$$M_4 = -\frac{1}{2}Fb + \frac{1}{2}Fb - Q(a - x) \quad 0 \leq x \leq a$$

Applying Castigiano's theorem, after setting Q=0, we have

$$\delta_h = \frac{1}{EI} \int_0^{b/2} \frac{1}{2}Fax dx + \frac{1}{EI} \int_{b/2}^b (-\frac{1}{2}Fax + \frac{1}{2}Fab) dx$$

Integrating, $\delta_h = \frac{Fab^2}{8EI}$

SOLUTION (10.10)

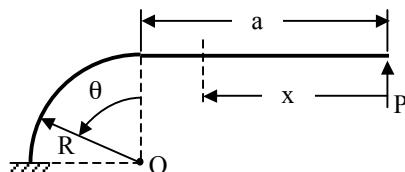

From symmetry,

$$M_1 = -Px \quad 0 \leq x \leq a$$

$$M_2 = -Pa - PR \sin \theta \quad 0 \leq \theta \leq \frac{\pi}{2}$$

Hence, $\frac{\delta}{2} = \frac{1}{EI} \int_0^a M_1 \frac{\partial M_1}{\partial P} dx + \frac{1}{EI} \int_0^{\pi/2} M_2 \frac{\partial M_2}{\partial P} R d\theta$

or

$$\begin{aligned} \delta &= \frac{2}{EI} \left[\int_0^a Px^2 dx + \int_0^{\pi/2} P(a + R \sin \theta)^2 R d\theta \right] \\ &= \frac{P}{6EI} (4a^3 + 6\pi Ra^2 + 24R^2a + 3\pi R^3) \end{aligned}$$

SOLUTION (10.11)

Referring to Fig. P10.11, we write

$$M = PR \sin \theta \quad T = PR(1 - \cos \theta)$$

$$m = R \sin \theta \quad t = R(1 - \cos \theta)$$

Here t denotes torque caused by a unit load.

Applying Eq. (10.13), deflection at the free end (perpendicular to the plane of the ring):

$$\begin{aligned} \delta &= \frac{1}{EI} \int_0^{\pi/2} (PR^2 \sin^2 \theta) Rd\theta + \frac{1}{JG} \int_0^{\pi/2} [PR^2(1 - \cos \theta)^2] Rd\theta \\ &= \frac{PR^3}{EI} \left[\frac{\theta}{2} - \frac{\sin 2\theta}{4} \right]_0^{\pi/2} + \frac{PR^3}{JG} \left[\theta - 2 \sin \theta + \frac{\theta}{2} + \frac{\sin 2\theta}{4} \right]_0^{\pi/2} \\ &= \frac{PR^3}{4} \left(\frac{\pi}{EI} + \frac{3\pi - 8}{JG} \right) \end{aligned}$$

Letting $J = 2I = \pi r^4/2$, we have

$$\delta = \frac{PR^3}{r^4} \left(\frac{1}{E} + \frac{0.226}{G} \right)$$



SOLUTION (10.12)

Referring to Fig. P10.12:

$$M = -PR \sin \theta \quad m = -R \sin \theta$$

$$T = PR(1 - \cos \theta) \quad t = R(1 - \cos \theta)$$

where t denotes torque caused by a unit load. We have

$$\sin(2\pi - \theta) = -\sin \theta \quad \text{and} \quad \cos(2\pi - \theta) = \cos \theta$$

Applying Eq. (10.13), deflection at the free end (perpendicular to the plane of the ring):


$$\delta = \frac{PR^3}{EI} \int_0^{2\pi} \sin^2 \theta d\theta + \frac{PR^3}{JG} \int_0^{2\pi} (1 - \cos \theta)^2 d\theta$$

Integrating,

$$\delta = PR^3 \pi \left[\frac{1}{EI} + \frac{3}{JG} \right]$$



SOLUTION (10.13)

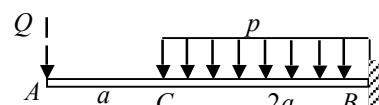

Segment AC

$$M_1 = -Qx \quad \frac{\partial M_1}{\partial Q} = -x$$

Segment BC

$$M_2 = -Qx - \frac{p}{2}(x-a)^2 \quad \frac{\partial M_2}{\partial Q} = -x$$

Thus,

$$v_A = \int_0^a \frac{M_1}{EI} \frac{\partial M_1}{\partial Q} dx + \int_a^{3a} \frac{M_2}{EI} \frac{\partial M_2}{\partial Q} dx$$

Let $Q=0$. Hence


(CONT.)

10.13 (CONT.)

$$\begin{aligned}
 v_A &= \frac{p}{2EI} \int_a^{3a} (x-a)^2 dx = \frac{p}{2EI} \int_a^{3a} (x^3 - 2ax^2 + a^2x) dx \\
 &= \frac{p}{2EI} \left[\frac{x^4}{4} - \frac{2ax^3}{3} + \frac{a^2x^2}{2} \right]_a^{3a} \\
 &= \frac{10}{3} \frac{pa^4}{EI} \downarrow
 \end{aligned}$$



SOLUTION (10.14)

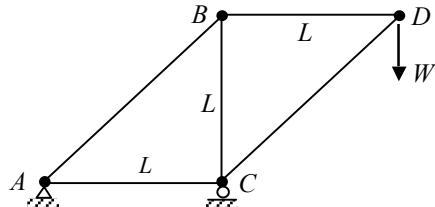

$$\begin{aligned}
 L_{AB} &= L_{CD} = \sqrt{2}L \\
 L_{BC} &= L_{AC} = L_{BD} = L
 \end{aligned}$$

The method of joints (or sections) is applied:


$$N_{AB} = \sqrt{2}W \quad N_{BC} = -W \quad N_{CD} = -\sqrt{2}W \quad N_{BD} = W \quad N_{AC} = -W$$

Thus,

$$\begin{aligned}
 \delta_V &= \frac{1}{AE} \sum N_j \frac{\partial N_j}{\partial W} L_j \\
 &= \frac{WL}{AE} [\sqrt{2}(\sqrt{2})\sqrt{2} + 1 + 1 + 1 + \sqrt{2}(\sqrt{2})\sqrt{2}] = 8.657 \frac{WL}{AE} \downarrow
 \end{aligned}$$



SOLUTION (10.15)

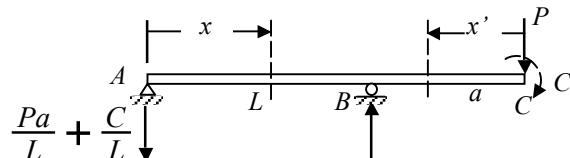

Segment AB

$$M_1 = -P \frac{a}{L} x - \frac{C}{L} x$$

Segment BC

$$M_2 = -Px' - C$$

(a) For this case $C=0$:

$$\begin{aligned}
 v_C &= \frac{1}{EI} \int_0^L \left(-\frac{Pax}{L} \right) \left(-\frac{ax}{L} \right) dx + \frac{1}{EI} \int_0^a -Px'(-x') dx' \\
 &= \frac{Pa^2}{EIL^2} \left| \frac{x^3}{3} \right|_0^L + \frac{P}{EI} \left| \frac{x'^3}{3} \right|_0^a = \frac{Pa^2}{3EI} (L+a) \downarrow
 \end{aligned}$$



(CONT.)

10.15 (CONT.)


$$(b) \quad \frac{\partial M_1}{\partial C} = -\frac{x}{L}, \quad \frac{\partial M_2}{\partial C} = -1.$$

For $C=0$, we have :

$$\begin{aligned}\theta_C &= \frac{1}{EI} \int_0^L \left(-\frac{Pax}{L}\right) \left(-\frac{x}{L}\right) dx + \frac{1}{EI} \int_0^a -Px'(-x') dx' \\ &= \frac{Pa}{EIL^2} \left| \frac{x^3}{3} \right|_0^L + \frac{P}{EI} \left| \frac{x'^2}{2} \right|_0^a \\ &= \frac{Pa}{6EI} (2L + 3a)\end{aligned}$$



SOLUTION (10.16)

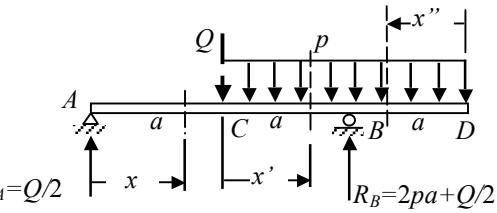

Segment AC

$$M_1 = \frac{1}{2} Qx \quad \frac{\partial M_1}{\partial Q} = \frac{x}{2}$$

Let $Q=0$:

$$\frac{1}{EI} \int_0^a M_1 \frac{\partial M_1}{\partial Q} dx = 0$$

Segment CB

$$M_2 = \frac{1}{2} Q(a+x') - Qx' - \frac{1}{2} px'^2$$

$$= \frac{Q}{2}(a-x') - \frac{1}{2} px'^2$$

$$\frac{\partial M_2}{\partial Q} = \frac{1}{2}(a-x')$$

Let $Q=0$:

$$\frac{1}{EI} \int M_2 \frac{\partial M_2}{\partial Q} dx' = \frac{1}{EI} \int_0^a \left(-\frac{px'^2}{2}\right) \frac{1}{2}(a-x') dx' = -\frac{pa^4}{48EI}$$


Segment BD

$$M_3 = -\frac{1}{2} px'^2 \quad \frac{\partial M_3}{\partial Q} = 0$$

Therefore

$$v_C = \int M_i \frac{\partial M_i}{\partial Q} dx = \frac{pa^4}{48EI} \uparrow$$

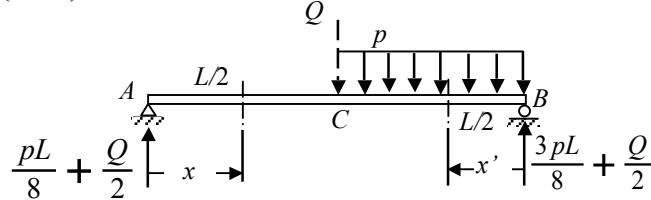

SOLUTION (10.17)

Segment AC

$$M_1 = \left(\frac{pL}{8} + \frac{Q}{2}\right)x \quad \frac{\partial M_1}{\partial Q} = \frac{x}{2}$$

Segment CB

$$M_2 = \left(\frac{3pL}{8} + \frac{Q}{2}\right)x' - \frac{px'^2}{2} \quad \frac{\partial M_2}{\partial Q} = \frac{x'}{2}$$



 Let $Q=0$:

$$\begin{aligned} EIv_C &= \int_0^{L/2} \frac{pLx}{8} \frac{x}{2} dx + \int_0^{L/2} \left(\frac{3pLx'}{8} - \frac{px'^2}{2}\right) \frac{x'}{2} dx' \\ &= p \int_0^{L/2} \frac{pLx^2}{16} dx + p \int_0^{L/2} \left(\frac{3pLx'^2}{16} - \frac{px'^3}{4}\right) dx' = \frac{pL^4}{96} \end{aligned}$$

or $v_C = \frac{pL^4}{96EI}$



SOLUTION (10.18)

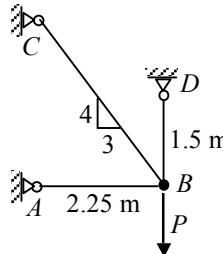 Consider R_D as redundant.


$$\begin{aligned} \frac{\partial N_{BD}}{\partial R_D} &= 1 \\ \sum F_y = 0: \quad N_{BC} &= 1.25P - 1.25R_D \end{aligned}$$

$$\sum F_x = 0: \quad N_{AB} = -0.75P + 0.75R_D$$

$$\text{where } \frac{\partial N_{BC}}{\partial R_D} = -1.25 \quad \frac{\partial N_{AB}}{\partial R_D} = 0.75$$

Thus,

$$\begin{aligned} AE\delta_D &= \sum N_j L_j \frac{\partial N_j}{\partial R_D} = 0 \\ &= (1.25P - 1.25R_D)(7.5)(-1.25) \\ &\quad + (-0.75P + 0.75R_D)(4.5)(0.75) + R_D(3)1 = 0 \\ &= -14.25P + 17.25R_D = 0 \end{aligned}$$



or $R_D = 0.826P$

Then $N_{BD} = 0.826P \quad N_{AB} = -0.131P \quad N_{BC} = 0.22P$




SOLUTION (10.19)

Let R_A and M_A be redundant.

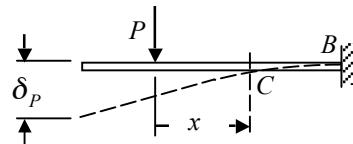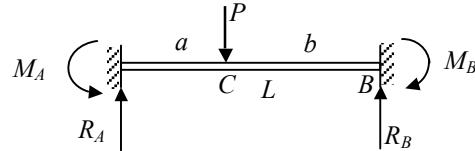

$$M = -Px$$

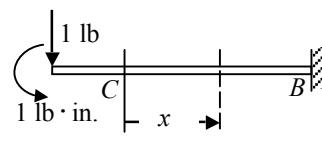


$$m = -1(a + x) \quad m' = -1$$

$$v_A = \int \frac{Mm}{EI} dx \quad \theta_A = \int \frac{Mm'}{EI} dx$$


$$v_{AP} = \frac{1}{EI} \int_0^b (-Px)[- (a + x)] dx = \frac{Pb^2}{EI} \left(\frac{a}{2} + \frac{b}{3} \right)$$

$$\theta_{AP} = \frac{1}{EI} \int_0^b (-Px)(-1) dx = \frac{Pb^2}{2EI}$$

Let now R_A and M_A be applied.

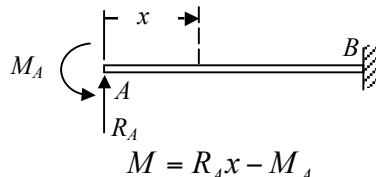

$$M = R_A x - M_A$$

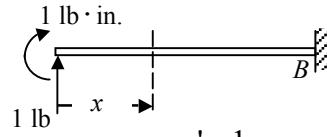

$$m = x \quad m' = 1$$

$$v_{AR} = \int_0^L \frac{(R_A x - M_A)x}{EI} dx = \frac{1}{EI} \left(\frac{R_A L^3}{3} - \frac{M_A L^2}{2} \right)$$

$$\theta_{AR} = \int_0^L \frac{(R_A x - M_A)1}{EI} dx = \frac{1}{EI} \left(\frac{R_A L^2}{2} - M_A L \right)$$

$$\text{Since } v_{AP} = v_{AR} \quad \theta_{AP} = \theta_{AR}$$

or


$$\frac{Pb^2}{EI} \left(\frac{a}{2} + \frac{b}{3} \right) = \frac{1}{EI} \left(\frac{R_A L^3}{3} - \frac{M_A L^2}{2} \right)$$

$$\frac{Pb^2}{2EI} = \frac{1}{EI} \left(\frac{R_A L^2}{3} - M_A L \right)$$

Solving,

$$R_A = \frac{Pb^2}{L^3} (3a + b) \uparrow \quad M_A = \frac{Pab^2}{L^2} \rightarrow$$

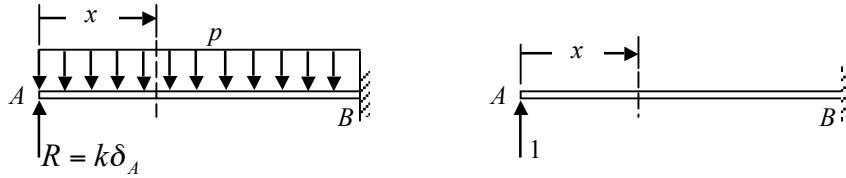

SOLUTION (10.20)


Refer to the above figures, we write:

$$M = Rx - \frac{1}{2}px^2 \quad m = -1x$$

Hence, deflection spring at A:

$$\begin{aligned}\delta_A &= \int \frac{Mm}{EI} dx = \frac{R}{k} \\ &= \frac{1}{EI} \int_0^L (Rx - \frac{1}{2}px^2)(-x) dx = \frac{R}{k}\end{aligned}$$

Solving


$$R = \frac{3pL/8}{1 + (3EI/kL^3)}$$



Reactions at B may then be found from statics.

SOLUTION (10.21)

Consider R_B as redundant.

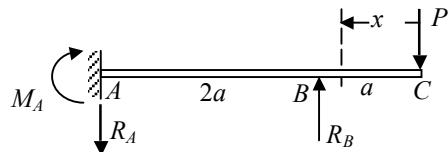

Segment BC:

$$M_1 = -Px \quad \partial M_1 / \partial R_B = 0$$

Segment AB:

$$M_2 = -Px + R_B(x-a) \quad \partial M_2 / \partial R_B = x-a$$

Thus,

$$\begin{aligned}EIv_B &= 0 = \int_0^a (-Px)(0) dx + \int_a^{3a} [-Px + R_B(x-a)](x-a) dx \\ &= \int_a^{3a} [-Px^2 + R_Bx^2 - 2R_Bax + Pax + R_Ba^2] dx \\ &= \left[-\frac{Px^3}{3} + \frac{R_Bx^3}{3} - R_Bax^2 + \frac{Pax^2}{2} + R_Bxa^2 \right]_a^{3a} \\ &= -\frac{14}{3}P + \frac{3}{8}R_B\end{aligned}$$

(CONT.)

10.21 (CONT.)

from which

$$R_B = \frac{7}{4}P \uparrow$$




Statics:

$$M_A = \frac{1}{2}Pa \curvearrowleft \quad R_A = \frac{3}{4}P \downarrow$$



SOLUTION (10.22)

Consider R_A and M_A as redundants.

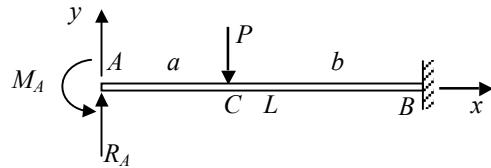

Segment AC:

$$M_1 = R_A x - M_A \quad \frac{\partial M_1}{\partial R_A} = x \quad \frac{\partial M_1}{\partial M_A} = -1$$

Segment BC:

$$M_2 = R_A x - M_A - P(x-a) \quad \frac{\partial M_2}{\partial R_A} = x \quad \frac{\partial M_2}{\partial M_A} = -1$$

Thus,

$$\begin{aligned} EI\nu_A = 0 &= \int_0^a (R_A x - M_A) x dx + \int_a^L [R_A x - M_A - P(x-a)] x dx \\ &= R_A \frac{a^3}{3} - M_A \frac{a^2}{2} + R_A \frac{L^3 - a^3}{3} - M_A \frac{L^2 - a^2}{2} - P \frac{L^3 - a^3}{3} \\ &\quad + Pa \frac{L^2 - a^2}{2} = 0 \end{aligned}$$

Simplifying,

$$\frac{1}{3}R_A L^3 - \frac{1}{2}M_A L^2 - \frac{P}{6}(3a+2b)b^2 = 0 \quad (1)$$

Similarly

$$\begin{aligned} EI\theta_A = 0 &= \int_0^a (R_A x - M_A)(-1) dx + \int_a^L [(R_A x - M_A - P(x-a))(-1)] dx \\ &= -R_A \frac{a^2}{2} + M_A a - R_A \frac{L^2 - a^2}{2} + M_A (L-a) + P \frac{L^2 - a^2}{2} \\ &\quad - Pa(L-a) = 0 \end{aligned}$$

This reduces to

$$\frac{1}{2}R_A L^2 - M_A L - \frac{1}{2}Pb^2 = 0 \quad (2)$$

(CONT.)

10.22 (CONT.)

Solving Eqs.(1) and (2):

$$M_A = \frac{Pab^2}{L^2} \curvearrowleft \quad R_A = \frac{Pb^2}{L^3}(3a+b) \uparrow$$




Statics:

$$R_B = \frac{Pa^2}{L^3}(a+3b) \uparrow \quad M_B = \frac{Pa^2b}{L^2} \curvearrowright$$



SOLUTION (10.23)

Consider R_B as redundant.

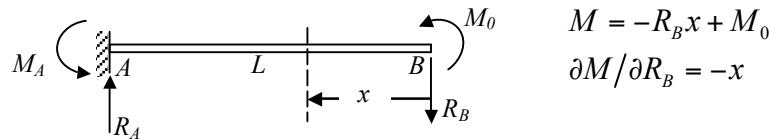

$$M = -R_B x + M_0$$

$$\partial M / \partial R_B = -x$$

Therefore

$$EIv_B = 0 = \int_0^L (R_B x^2 - M_0 x) dx = \frac{1}{3} R_B L^3 - \frac{1}{2} M_0 L^2$$

Solving

$$R_B = \frac{3}{2} \frac{M_0}{L} \downarrow$$



Statics:

$$R_A = \frac{3}{2} \frac{M_0}{L} \uparrow \quad M_A = \frac{1}{2} M_0 \curvearrowright$$



SOLUTION (10.24)

We introduce a couple moment C at point B. The expression for the moments are then,

$$M_1 = -R_D x \quad 0 \leq x \leq \frac{L}{2}$$

$$M_2 = -R_D x + P(x - \frac{L}{2}) + C \quad \frac{L}{2} \leq x \leq L$$

Applying Eq. (10.6), $\delta_B = \partial U / \partial P$:

$$\delta_B = \frac{1}{EI} \left\{ \int_{L/2}^L [-R_D x + P(x - \frac{L}{2}) + C](x - \frac{L}{2}) dx \right\}$$

Setting C=0 and integrating,

$$\delta_B = -\frac{PL^3}{48EI} \left[\frac{25/16}{1-(3EI/kL^3)} - 2 \right]$$



Similarly, applying Eq. (10.7), $\theta_B = \partial U / \partial C$:

$$\theta_B = \frac{1}{EI} \left\{ \int_{L/2}^L [-R_D x + P(x - \frac{L}{2}) + C] dx \right\}$$



Setting C=0 and integrating,

$$\theta_B = -\frac{15PL^2}{128EI} \frac{1}{1-(3EI/kL^3)}$$



SOLUTION (10.25)

Apply Eq. (10.7) to write

$$\theta_A = \frac{1}{JG} \left[\int_0^a T_A \frac{\partial T_A}{\partial T_A} dx + \int_0^b (T_A - T) \frac{\partial(T_A - T)}{\partial T_A} \right] = 0$$

Integrating and simplifying:

$$T_A a + (T_A - T)b = 0 \quad \text{or} \quad T_A = \frac{b}{L} T$$

Condition of equilibrium gives

$$T_B = T - T_A = \frac{a}{L} T$$



SOLUTION (10.26)

We write

$$M_1 = Qx \quad 0 \leq x \leq a$$

$$M_2 = Q(a + R \sin \theta) + PR(1 - \cos \theta) \quad 0 \leq \theta \leq \pi$$

Applying Eq. (10.6), with $\delta_Q = 0$:

$$\frac{\partial U}{\partial Q} = 0 = \frac{1}{EI} \int_0^a Qx^2 dx + \int_0^\pi [Q(a + R \sin \theta) + PR(1 - \cos \theta)](a + R \sin \theta) R d\theta$$

Integrating,


$$0 = \frac{QL^3}{3EI} + \frac{QR}{EI} (\pi a^2 + 4Ra + \frac{\pi}{2} R^2) + \frac{PR^2}{EI} (\pi a + 2R)$$



This may be written in the following form:

$$Q = \frac{-PR^3(\pi a + 2R)}{a^3[\frac{1}{3} + \frac{\pi R}{a} + 4(\frac{R}{a})^2 + \frac{\pi}{2}(\frac{R}{a})^3]}$$

SOLUTION (10.27)

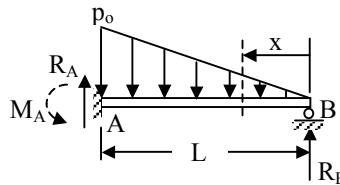

We have

$$M = -R_B x + \frac{p_0 x}{L} \frac{x}{2} \frac{x}{3} = -R_B x + \frac{p_0 x^3}{6}$$

Then,

$$\delta_B = 0 = \frac{1}{EI} \int M \frac{\partial M}{\partial R_B} dx = \frac{1}{EI} \int_0^L (R_B x - \frac{p_0 x^3}{6L}) x dx$$

This yields, after integrating,

$$R_B = \frac{p_0 L}{10}$$



Then, from equations of statics:

$$R_A = \frac{4p_0 L}{10} \quad M_A = \frac{p_0 L^2}{15}$$



SOLUTION (10.28)

Moments are expressed by

$$M_1 = -Rx \quad 0 \leq x \leq \frac{L}{2}$$

$$M_2 = -Rx + M_0 \quad \frac{L}{2} \leq x \leq L$$

Applying Eq. (10.6), with $\delta_R = 0$:


$$\frac{\partial U}{\partial R} = 0 = \frac{1}{EI} \int_0^{L/2} Rx^2 dx + \frac{1}{EI} \int_{L/2}^L (-Rx + M_0)(-x) dx$$

from which

$$R = \frac{9M_0}{8L}$$

Using Eq. (10.7), slope at C:

$$\begin{aligned} \theta_C &= \frac{\partial U}{\partial M} = 0 + \frac{1}{EI} \int_{L/2}^L (-Rx + M_0) dx \\ &= \frac{5M_0L}{64EI} \end{aligned}$$

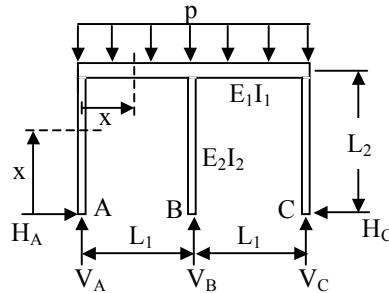SOLUTION (10.29)


$$M_1 = H_A x \quad 0 \leq x \leq L_2$$

$$M_2 = -V_A x + H_A L_2 + \frac{1}{2} p x^2 \quad 0 \leq x \leq L_1$$

Applying Eq. (10.6), with $\delta_{Av} = 0$ and $\delta_{Ah} = 0$, respectively:

$$\frac{\partial U}{\partial V_A} = \frac{1}{E_1 I_1} \int_0^{L_1} (-V_A x + H_A L_2 + \frac{px^2}{2})(-x) dx = 0 \quad (a)$$

$$\frac{\partial U}{\partial H_A} = \frac{1}{E_2 I_2} \int_0^{L_2} H_A x(x) dx + \frac{1}{E_1 I_1} \int_0^{L_1} (-V_A x + H_A L_2 + \frac{1}{2} p x^2) L_2 dx = 0 \quad (b)$$

Letting

$$\lambda = \frac{E_2 I_2 L_1}{E_1 I_1 L_2}$$

Equations (a) and (b) become

$$8V_A - 12H_A L_2 = 3pL_1^2$$


$$3\lambda V_A L_1 - 2(3\lambda + 1)H_A L_2 = \lambda p L_1^2$$

or

$$V_A = \frac{3(\lambda+1)}{2(3\lambda+4)} p L_1 = R_{Av}$$

$$H_A = \frac{\lambda}{4(3\lambda+4)} \frac{p L_1^2}{L_2} = R_{Ah}$$

The remaining reactions may then be found by using the equations of equilibrium.

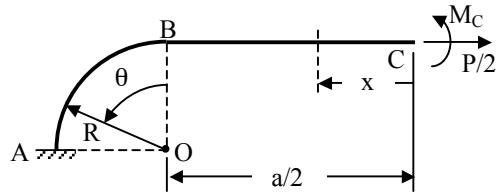SOLUTION (10.30)


Clearly, the problem is statically in determined. We have

$$M_x = -M_C \quad 0 \leq x \leq \frac{a}{2}$$

$$M_x = -M_C + \frac{1}{2} PR(1 - \cos \theta) \quad 0 \leq \theta \leq \frac{\pi}{2}$$

Slope at C is zero:

$$\frac{\partial U}{\partial M_C} = \frac{1}{EI} \int_0^{\pi/2} (-M_C R + \frac{PR^2}{2} - \frac{PR^2}{2} \cos \theta) d\theta + \frac{1}{EI} \int_0^{a/2} -M_C dx = 0$$

Integrating,

$$M_C = \frac{PR^2(\pi-2)}{2(a+\pi R)}$$

Hence, for $0 \leq \theta \leq \frac{\pi}{2}$:

$$M = -\frac{PR^2(\pi-2)}{2(a+\pi R)} + \frac{PR}{2} - \frac{PR}{2} \cos \theta$$



For $0 \leq x \leq a$:

$$M = \frac{PR^2(\pi-2)}{2(a+\pi R)}$$

Therefore, M is maximum along a, for $\theta = 0$.

SOLUTION (10.31)

(a) Introduce Q at point E, as shown. (disregard C/L's).

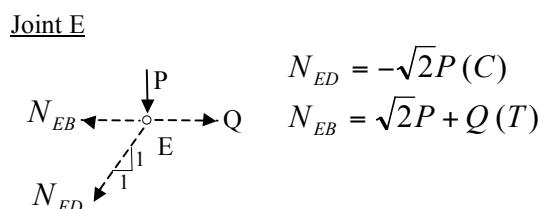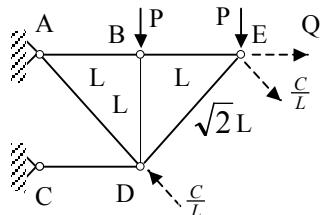

Similarly we obtain the remaining member forces.

Joint B

$$N_{BD} = -P(C)$$

$$N_{BA} = \sqrt{2}P + Q(T)$$

$$\delta_E = \sum \frac{N_j L_j}{AE} \frac{\partial N_j}{\partial Q} = \frac{1}{AE} [(\sqrt{2}P)(5)(1) + (\sqrt{2}P)(5)(1) + 0 + 0 + 0 + 0] = \frac{10\sqrt{2}P}{AE}$$

Joint D

$$N_{DA} = 2P\sqrt{2}$$


$$N_{DC} = -3P(C)$$

(CONT.)

10.31 (CONT.)

- (b) Introduce couple C/L applied perpendicular to line DE at points D and E as shown in the figure (now disregard Q).

Joint E

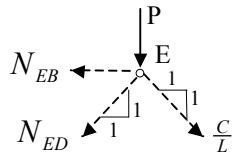

$$N_{ED} = -(P + \frac{C}{\sqrt{2}L})\sqrt{2}(C)$$

$$N_{E_B} = P + \frac{2C}{\sqrt{2}L}(T)$$

Similarly, Joint D

$$N_{DA} = 2\sqrt{2}P \quad N_{DC} = -3P - \frac{2C}{\sqrt{2}L}(C)$$

Thus

$$\theta_{DE} = \frac{1}{AE} \sum N_j \frac{\partial N_j}{\partial C} = \frac{P}{AE} \left(\frac{2}{\sqrt{2}} + \frac{2}{\sqrt{2}} + \sqrt{2} + \frac{6}{\sqrt{2}} \right) = \frac{P}{AE} \left(\frac{10}{\sqrt{2}} + \sqrt{2} \right)$$



SOLUTION (10.32)

The complementary energy for the *i*th member of length L_i , from Eq. (2.49) is

$$U_{0i}^* = \int_0^{\sigma_i} \frac{\sigma_i^3}{K^3} d\sigma = \frac{\sigma_i^4}{4K^3} = \frac{1}{4K^3} \left(\frac{N_i}{A_i} \right)^4$$

The complementary energy of the truss is thus

$$U^* = \sum_{j=1}^6 \frac{A_j L_j}{4K^3} \left(\frac{N_j}{A_j} \right)^4$$

Equation (10.16) is then

$$\delta_E = \sum_{j=1}^6 \frac{L_j}{K^3} \left(\frac{N_j}{A_j} \right)^3 \frac{\partial N_j}{\partial P} \quad (\text{P10.32})$$

Applying the method of joints, as needed, we obtain

$$N_1 = \frac{3P}{2} \quad N_2 = -\frac{5P}{4} \quad N_3 = 0$$

$$N_4 = \frac{5P}{4} \quad N_5 = N_6 = -\frac{3P}{4}$$

We have $L_1 = L_5 = L_6 = 3 \text{ m}$, $L_3 = 4 \text{ m}$, $L_2 = L_4 = 5 \text{ m}$ and $A_i = A$.

Equation (P10.32) becomes

$$\delta_E = \left(\frac{1}{AK} \right)^3 \{ L_1 N_1^3 \left(\frac{\partial N_1}{\partial P} \right) + L_2 N_2^3 \left(\frac{\partial N_2}{\partial P} \right) + \dots + L_6 N_6^3 \left(\frac{\partial N_6}{\partial P} \right) \}$$

or


$$\begin{aligned} \delta_E &= \left(\frac{P}{AK} \right)^3 \{ 3 \left(\frac{3}{2} \right)^3 \left(\frac{3}{2} \right) + 5 \left(-\frac{5}{4} \right)^3 \left(\frac{5}{4} \right) + 0 \\ &\quad + \left(\frac{5}{4} \right)^3 \left(\frac{5}{4} \right) + 3 \left(\frac{3}{4} \right)^3 \left(\frac{3}{4} \right) + 3 \left(-\frac{3}{4} \right)^3 \left(-\frac{3}{4} \right) \} \\ &= \left(\frac{P}{AK} \right)^3 \frac{48 \times 81 + 5 \times 625 \times 2 + 3 \times 81 \times 2}{256} \end{aligned}$$

or

$$\delta_E = 41.5 \left(\frac{P}{AK} \right)^3$$



SOLUTION (10.33)

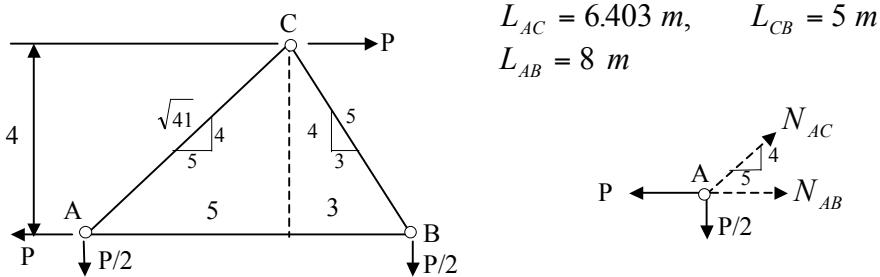

Joint A

$$\begin{aligned} \sum N_y &= 0 : & N_{AC} &= \frac{\sqrt{41}}{8} P \\ \sum N_x &= 0 : & N_{AB} &= \frac{3}{8} P \end{aligned}$$

Joint B

$$N_{BC} = -\frac{5}{8}P$$

A horizontal unit load is applied at C:

$$n_{AB} = \frac{3}{8}, \quad n_{BC} = -\frac{5}{8}, \quad n_{AC} = \frac{\sqrt{41}}{8}$$

Thus

$$\begin{aligned}\delta_C &= \frac{1}{AE} \sum n_j N_j L_j \\ &= \frac{P}{AE} \left[\left(\frac{\sqrt{41}}{8}\right) \left(\frac{\sqrt{41}}{8}\right) (6.403) + \left(-\frac{5}{8}\right) \left(\frac{5}{8}\right) (5) + \left(\frac{3}{8}\right) \left(\frac{3}{8}\right) (8) \right] \\ &= 7.18 \frac{P}{AE} \rightarrow\end{aligned}$$

SOLUTION (10.34)

(a) Refer to Fig. (a) with *no* unit load:

$$M_{4R} = 0 \quad M_{RF} = Rx$$

$$M_{EG} = Rx - P(x - L)$$

$$M_{\perp\perp} \equiv R(2L) = PL$$

The vertical deflection at A is zero.

Thus

$$\delta_v = \frac{1}{EI} \sum M_i \frac{\partial M_i}{\partial R} dx = 0$$

$$= \int_0^L dx + \int_0^L Rx(x)dx + \int_L^{2L} [Rx - P(x-L)]x dx + \int_0^{2L} (2LR - PL)(2L)dx = 0$$

Integrating, we have

$$R = \frac{29}{64} P$$


(b) Introducing a horizontal unit load at A, Fig. (a), we write

$$m_{AP} = x \quad m_{PE} = L \quad m_{EC} = L \quad m_{CD} = L - x$$

Hence

$$\delta_h = \frac{1}{EI} \sum M_i m_i dx$$

Figure (a)

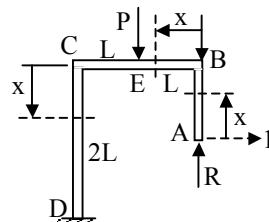

10.34 (CONT.)


$$= \frac{1}{EI} \left\{ \int_0^L 0 dx + \int_0^L Rx(L) dx + \int_L^{2L} [Rx - P(x-L)] L dx + \int_0^{2L} (2LR - PL)(L-x) dx \right\}$$

Integrating, after substituting $R = 29P/64$, results in

$$\delta_h = \frac{13}{32} \frac{PL^3}{EI}$$



SOLUTION (10.35)

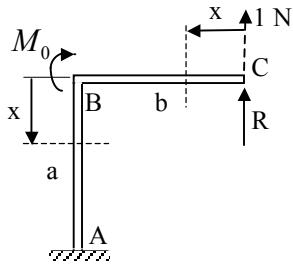

Introduce a vertical upward unit force 1 N at point C. Then
Segment CB:

$$M_1 = Rx \quad m_1 = x$$

Segment BA:

$$M_2 = Rb = M_0 \quad m_2 = b$$



Thus

$$\begin{aligned} EI\delta_C &= 0 = \int_0^b M_1 m_1 dx + \int_0^a M_2 m_2 dx \\ &= \int_0^b Rx^2 dx + \int_0^b (Rb - M_0)(b) dx \\ &= \frac{1}{3} Rb^3 + Rab^2 - M_0 ba \end{aligned}$$

or

$$R = \frac{3M_0a}{b(3a+b)} \uparrow$$



SOLUTION (10.36)

We have $\alpha = 6/5$ (Table 5.1), $dx = ds = Rd\theta$

Let a downward unit load of 1 N in addition to load P is applied at the free end in Fig. P17.25.

We write

$$\begin{aligned} N &= P \cos \theta & n &= \cos \theta \\ V &= P \sin \theta & v &= \sin \theta \\ M &= PR(1 - \cos \theta) & m &= R(1 - \cos \theta) \end{aligned} \tag{a}$$

Thus,

$$\delta_v = \frac{1}{EI} \int_0^{\frac{3\pi}{2}} MmRd\theta + \frac{1}{AG} \int_0^{\frac{3\pi}{2}} \alpha V v dx + \frac{1}{AE} \int_0^{\frac{3\pi}{2}} Nn ds$$


Substitution of Eqs.(a) gives

$$\delta_v = \frac{PR^3}{EI} \int_0^{\frac{3\pi}{2}} (1 - \cos \theta)^2 d\theta + \frac{6PR}{5AG} \int_0^{\frac{3\pi}{2}} \sin \theta d\theta + \frac{PR}{AE} \int_0^{\frac{3\pi}{2}} \cos^2 \theta d\theta$$

Integrating

$$\delta_v = \left(\frac{9\pi}{4} + 2 \right) \frac{PR^3}{EI} + \frac{3.6PR}{4AG} + \frac{3\pi PR}{4AE} \downarrow$$

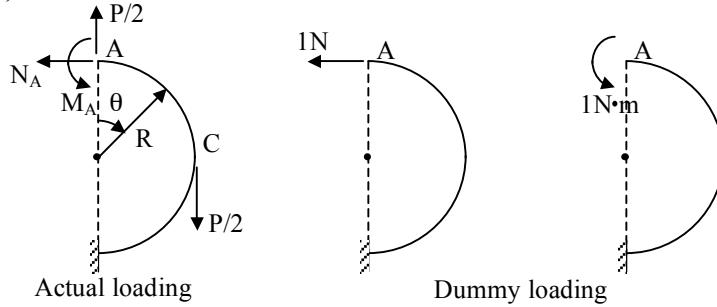

SOLUTION (10.37)


Because of symmetry about the vertical axis, only one half of the circle need be analyzed. Referring to the figure above, we have the following moments:

For $0 \leq \theta \leq \frac{\pi}{2}$:

$$M_1 = M_A + N_A R(1 - \cos \theta) - \frac{1}{2} PR \sin \theta \quad (a)$$

$$m_1 = R(1 - \cos \theta), \quad m_1' = 1$$

For $\frac{\pi}{2} \leq \theta \leq \pi$:

$$M_2 = M_A + N_A R(1 - \cos \theta) - \frac{1}{2} PR \quad (b)$$

$$m_2 = R(1 - \cos \theta), \quad m_2' = 1$$

Horizontal deflection and slope are zero at A. Thus, from Eqs. (10.13) and (10.14):

$$\delta_{Ah} = \frac{1}{EI} \int_0^{\pi} MR(1 - \cos \theta) Rd\theta = 0$$

or

$$\int_0^{\pi} M(1 - \cos \theta) d\theta = 0 \quad (c)$$

$$\theta_A = \frac{1}{EI} \int_0^{\pi} Mm' dx = \frac{1}{EI} \int_0^{\pi} M(1) dx = 0$$

or

$$\int_0^{\pi} M = 0, \text{ where } M \text{ represents } M_1 \text{ and } M_2. \quad (d)$$

Substituting Eq. (d) into Eq. (c), the latter reduces to

$$\int_0^{\pi} M \cos \theta d\theta = 0 \quad (e)$$

Introducing Eqs. (a) and (b) into Eqs. (d) and (e), we have

$$M_A \int_0^{\pi} d\theta + N_A R \int_0^{\pi} (1 - \cos \theta) d\theta - \frac{1}{2} PR \int_0^{\pi/2} \sin \theta d\theta - \frac{1}{2} PR \int_{\pi/2}^{\pi} d\theta = 0$$

and $M_A \int_0^{\pi} \cos \theta d\theta + N_A R \int_0^{\pi} (1 - \cos \theta) \cos \theta d\theta$

$$- \frac{1}{2} PR \int_0^{\pi/2} \sin \theta \cos \theta d\theta - \frac{1}{2} PR \int_{\pi/2}^{\pi} \cos \theta d\theta = 0$$

Integrating and solving,

$$N_A = \frac{P}{2\pi} \quad M_A = \frac{PR}{4}$$



SOLUTION (10.38)

From Eq. (P10.38), we have

$$U = \frac{GJ}{2} \left[\left(\frac{\theta_C}{a} \right)^2 a + \left(\frac{\theta_C}{b} \right)^2 b \right]$$

Using Eq. (10.22):

$$\frac{\partial U}{\partial \theta_C} = T; \quad GJ\theta_C \left(\frac{1}{a} + \frac{1}{b} \right) = T$$

Solving,

$$\theta_C = \frac{Tab}{GJL}$$

Then

$$T_A = \frac{GJ}{a} \theta_C = \frac{b}{L} T$$

and

$$T_B = \frac{GJ}{b} \theta_C = \frac{a}{L} T$$

SOLUTION (10.39)

$$L_{AD} = L_{DC} = 4.24 \text{ m}$$

$$U = \frac{1}{2} ALE \varepsilon^2 = \frac{1}{2} ALE \left(\delta_v \frac{\cos \alpha}{L} \right)^2$$

Vertical load of the joint, using Eq. (10.22),

$$\frac{\partial U}{\partial \delta_v} = P = \sum_{i=1}^3 \frac{E_i A_i}{L_i} \delta_v \cos^2 \alpha$$


or

$$P = EA \delta_v \left[\frac{\cos^2 45^\circ}{L_{AD}} + \frac{\cos^2 45^\circ}{L_{DC}} + \frac{1}{L_{BD}} \right] = 0.5689 AE \delta_v$$

Substituting the numerical values,

$$P = 373.34 \text{ kN}$$

SOLUTION (10.40)

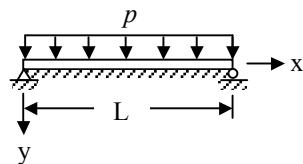

The deflection curve may be expressed by Eq. (10.23) and the bending strain energy is given by Eq. (10.25). The strain energy of deformation of the foundation is (Chap. 9):

$$U_2 = \frac{1}{2} k \int_0^L v^2 dx = \frac{1}{4} kL \sum_{n=1}^{\infty} a_n^2$$

Work done by the uniform load:

$$W = \frac{1}{2} \int_0^L p v dx = p \left(\frac{L}{\pi} \right) \sum_{n=1}^{\infty} \frac{1}{n} a_n \cos \frac{n\pi x}{L} \Big|_0^L$$

$$\text{or } W = \frac{2pL}{\pi} \sum_{n=1,3,\dots}^{\infty} \frac{a_n}{n}$$

(CONT.)

10.40 (CONT.)

Then, principle of virtual work yields

$$\frac{\pi^4 EI}{2L^5} n^4 a_n + \frac{kL}{2} a_n = \frac{2pL}{n\pi}$$


or

$$a_n = \frac{4pL^4}{n\pi(n^4\pi^4 EI + kL^4)}$$



Substituting this into Eq. (10.23) we obtain the required deflection curve.

SOLUTION (10.41)

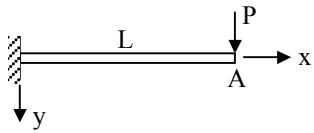

We obtain

$$v'' = 3 \frac{a_1}{L^3} (L - x)$$

and

$$\begin{aligned} U &= \frac{EI}{2} \int_0^L (v'')^2 dx = \frac{9EIa_1^2}{2L^6} \int_0^L (L - x)^2 dx \\ &= \frac{3EI}{2L^3} a_1^2 \end{aligned} \quad (\text{a})$$

$$\text{Also } \delta W = P \cdot \delta v_A \quad (\text{b})$$

Thus, $\delta W = \delta U$ gives,

$$P \cdot \delta a_1 = \frac{3EI}{2L^3} (2a_1 \delta a_1)$$

or

$$v_A = a_1 = \frac{PL^3}{3EI}$$



SOLUTION (10.42)

Strain energy, by Eq. (c) of Sec. 10.10:

$$U = \frac{\pi^4 EI}{64L^5} a^2$$

Work done by the load P is

$$\begin{aligned} W &= \int_0^L p v dx = pa \int_0^L dx - pa \int_0^L \cos \frac{\pi x}{2L} dx \\ &= pa(L - \frac{2L}{\pi}) \end{aligned}$$

Applying the Ritz method, we obtain

$$\frac{dU}{da} = \frac{d}{da}(U - W) = \frac{\pi^4 EI}{64L^3} - pL(1 - \frac{2L}{\pi}) = 0$$

Solving

$$a = 0.1194 \frac{pL^4}{EI}$$



Substitution of this into Eq. (P10.31) and letting $x=L$ result in the deflection v_A at the free end of the beam.

SOLUTION (10.43)

$$W = P \cdot v_A = P(a_1 L^2 + a_2 L^3) = PL^2(a_1 + a_2 L)$$

$$U = \frac{EI}{2} \int_0^L (v'')^2 dx = 2EIL(a_1^2 + 3a_1 a_2 L + 3a_2^2 L^2)$$

Thus,

$$\frac{\partial \Pi}{\partial a_1} = 0 : \quad PL^2 = 2EIL(2a_1 + 3a_2 L)$$

$$\frac{\partial \Pi}{\partial a_2} = 0 : \quad PL^3 = 6EIL^2(a_1 + 2a_2 L)$$


Solving,

$$a_1 = \frac{PL}{2EI} \quad a_2 = -\frac{P}{6EI}$$

Substituting back into Eq. (P10.32):

$$v = \frac{Px^2}{6EI}(3L - x)$$

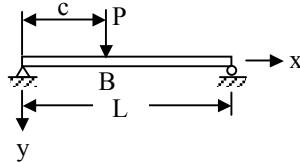

SOLUTION (10.44)


We have

$$\Pi = \frac{EI}{2} \int_0^L (v'')^2 dx - P \cdot v_B \quad (a)$$

Here

$$v = ax(L - x) = axL - ax^2$$

$$v' = aL - 2ax, \quad v'' = -2a$$

Substituting these into Eq. (a), after integration, we obtain

$$\Pi = 2a^2 EIL - PacL + Pac^2$$

and

$$\frac{d\Pi}{da} = 4aEIL - Pcl + Pc^2 = 0$$

or

$$a = \frac{Pc(L-c)}{4EIL}$$

The deflection of the beam at point B is therefore

$$v_B = \frac{Pc^2(L-c)^2}{4EIL}$$



SOLUTION (10.45)

The assumed deflection is of the general cubic form:

$$v = a_1 x^3 + a_2 x^2 + a_3 x + a_4 \quad (a)$$

For the left hand portion of the beam:

$$v = 0 \quad (\text{at } x = 0); \quad v' = 0 \quad (\text{at } x = 0) \quad (1, 2)$$

$$v' = 0 \quad (\text{at } x = L/2); \quad v = \Delta \quad (\text{at } x = L/2); \quad (3, 4)$$

Here Δ is, deflection at midspan, to be determined.

Eqs. (1) and (2) give $a_3 = a_4 = 0$

(CONT.)

10.45 (CONT.)

$$\text{Eq. (3) yields } a_2 = -\frac{3a_1 L}{4}$$

$$\text{Eq. (4) gives } a_1 = -\frac{16\Delta}{L^3}$$

Introducing these into Eq. (a):

$$v = \frac{4\Delta x^2}{L^3} (3L - 4x) \quad 0 \leq x \leq \frac{L}{2} \quad (\text{b})$$

Strain energy is

$$U = 2\left(\frac{EI/2}{2}\right) \int_0^{L/4} (v'')^2 dx + 2\left(\frac{EI}{2}\right) \int_{L/4}^{L/2} (v'')^2 dx \quad (\text{c})$$

Inserting Eq. (b) into Eq. (c) and integrating, we obtain: $U = \frac{72EI\Delta^2}{L^3}$

We have

$$\Pi = \frac{72EI\Delta^2}{L^3} - P\Delta$$

The midspan deflection, from $\partial\Pi/\partial\Delta = 0$, is thus

$$\Delta = \frac{PL^3}{144EI} = v_{\max} \quad \blacktriangleleft$$

SOLUTION (10.46)

We obtain

$$v'' = \sum_{n=1}^{\infty} a_n \left(\frac{n\pi}{L}\right)^2 \cos \frac{n\pi x}{L}$$

$$U = \frac{EI}{2} \int_0^L (v'')^2 dx = \frac{EI}{2} \sum_{n=1}^{\infty} a_n^2 \left(\frac{n\pi}{L}\right)^4 \frac{L}{2}$$

$$W = P(v)_{x=\frac{L}{2}} = P \sum_n 2a_n \quad (n = 2, 4, 6, \dots)$$

From the minimizing condition, $\partial\Pi/\partial a_n = 0$, we obtain

$$EIa_n \left(\frac{n\pi}{L}\right)^4 \frac{L}{2} - 2P = 0$$

or


$$a_n = \sum_n \frac{4PL^3}{n^4 \pi^4 EI} \quad (n = 2, 4, 6, \dots)$$

Therefore,

$$v_{\max} = v\left(\frac{L}{2}\right) = \frac{8PL^3}{\pi^4 EI} \sum_n \frac{1}{n^4} \quad (n = 2, 4, 6, \dots) \quad \blacktriangleleft$$

CHAPTER 11

SOLUTION (11.1)

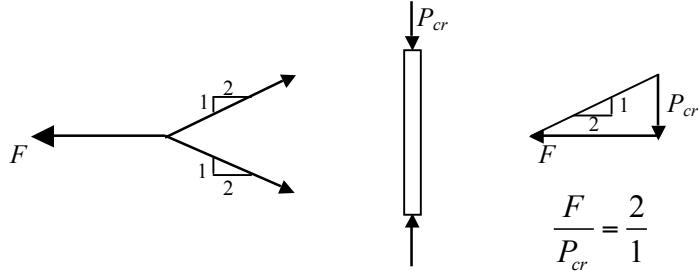

$$I = \frac{\pi}{4}(c^4 - b^4) = \frac{\pi}{4}(25^4 - 20^4) = 18.11 \times 10^4 \text{ mm}^4$$

$$\frac{P_{cr}}{n} = \frac{\pi^2 EI}{nL^2} = \frac{\pi^2(200 \times 10^9)(0.1811 \times 10^{-6})}{2.5(1)^2} = 143 \text{ kN}$$

$$F = 2.5(143) = 357.5 \text{ kN}$$



Justification of the formula used:

$$A = \pi(c^2 - b^2) = \pi(25^2 - 20^2) = 706.86 \text{ mm}^2$$

$$r = \sqrt{\frac{I}{A}} = \sqrt{\frac{181,100}{706.86}} = 5.06 \text{ mm}$$

and

$$\frac{L}{r} = \frac{1000}{5.06} = 197.6 \text{ O.K.}$$

SOLUTION (11.2)

(a) Same area:

$$\frac{\pi}{4}(d_o^2 - d_i^2) = b_o^2 - b_i^2$$

$$b_i^2 = b_o^2 - \frac{\pi}{4}(d_o^2 - d_i^2) = 50^2 - \frac{\pi}{4}(50^2 - 40^2)$$

or

$$b_i = 42.35 \text{ mm} \quad t = \frac{1}{2}(b_o - b_i) = 3.83 \text{ mm}$$



(b) Circular bar

$$I = \frac{\pi}{64}(d_o^4 - d_i^4) = \frac{\pi}{64}(50^4 - 40^4) = 181 \times 10^{-9} \text{ in.}^4$$

$$P_{cr} = \frac{\pi^2 EI}{L_e^2} = \frac{\pi^2(72 \times 10^9)(181 \times 10^{-9})}{(3)^2} = 14.29 \text{ kN}$$



(CONT.)

11.2 (CONT.)

Square bar

$$I = \frac{1}{12}(b_o^4 - b_i^4) = \frac{1}{12}(50^4 - 42.35^4) = 252.8 \times 10^{-9} \text{ m}^4$$

$$P_{cr} = \frac{\pi^2 EI}{L_e^2} = \frac{\pi^2 (72 \times 10^6)(252.8 \times 10^{-9})}{(3)^2} = 19.96 \text{ kN}$$



SOLUTION (11.3)

$$L_{BC} = \sqrt{2^2 + 1^2} = 2.236 \text{ m} \quad r = \frac{d}{4} = \frac{50}{4} = 12.5 \text{ mm}$$

$$I = \frac{\pi}{64} d^4 = \frac{\pi}{64} (40)^4 = 125.7(10^{-9}) \text{ m}^4, \quad L_{AB} = \sqrt{1^2 + 1^2} = 1.414 \text{ m}$$


Bar BC ($L/r = 2.236/12.5 = 178$) Thus

$$(F_{BC})_{all} = \frac{P_{cr}}{n} = \frac{\pi^2 (70)(125.7)}{1.8(2.236)^2} = 9.65 \text{ kN}$$

Bar AB

$$(F_{AB})_{all} = \frac{P_{cr}}{n} = \frac{\pi^2 (70)(125.7)}{1.8(1.414)^2} = 24.1 \text{ kN}$$

Joint B

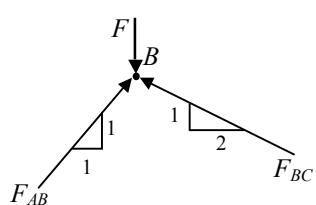

$$\sum F_x = 0 : \frac{1}{\sqrt{2}} F_{AB} - \frac{2}{\sqrt{5}} F_{BC} = 0, \quad F_{BC} = 0.791 F_{AB}$$

$$\sum F_y = 0 : \frac{1}{\sqrt{2}} F_{AB} + \frac{1}{\sqrt{5}} F_{BC} - F = 0, \quad F = 1.061 F_{AB}$$

Solving

$$F = 1.061 F_{AB}$$

$$F = 1.341 F_{BC}$$

The allowable value for F:

$$F < 1.341(9.65) = 12.93 \text{ kN}$$

$$F < 1.061(24.1) = 25.6 \text{ kN}$$

Thus

$$F_{all} = 12.93 \text{ kN}$$



SOLUTION (11.4)

Differential equation for a free-body of a segment of x is given by Eq.(11.1):

$$EI \frac{d^2 v}{dx^2} + Pv = 0$$

(CONT.)

11.4 (CONT.)

or

$$\frac{d^2v}{dx^2} + p^2 v = 0 \quad p = \sqrt{\frac{P}{EI}}$$

General solution is

$$v = A \sin px + B \cos px \quad (1)$$

Boundary conditions :

$$v(0) = 0 : 0 + 0 + B = 0, \quad B = 0$$

$$v'(L) = 0 : AP \cos pL = 0, \quad Ap = 0$$

Since $A \neq 0$:

$$\cos \sqrt{\frac{P}{EI}} L = 0 \quad \text{or} \quad \sqrt{\frac{P}{EI}} L = n\left(\frac{\pi}{2}\right)$$

$$\text{For } n = 1, \quad \frac{P}{EI} = \frac{\pi^2}{4L^2}$$

Therefore

$$P_{cr} = \frac{\pi^2 EI}{4L^2}$$



SOLUTION (11.5)

$$I_{min} = \frac{1}{12}(240 \times 120^3 - 190 \times 70^3) = 29.13 \times 10^6 \text{ mm}^4$$

$$A = 240 \times 120 - 190 \times 70 = 15.5 \times 10^3 \text{ mm}^2$$

$$r_{min} = \sqrt{I_{min}/A} = 43.35 \text{ mm} \quad L_e = 0.5L = 4.5 \text{ m}$$

$$L_e/r = 4500/43.35 = 103.8$$

Hence,

$$\sigma_{cr} = \frac{\pi^2 E}{(L_e/r)^2} = \frac{\pi^2 (200 \times 10^9)}{(103.8)^2} = 183.2 \text{ MPa}$$



SOLUTION (11.6)

$$L_e = 0.7L = 6.3 \text{ m}. \text{ From solution of Prob.11.5: } r_{min} = 43.35 \text{ mm}.$$


We now have

$$L_e/r = 6300/43.35 = 145.3$$

Hence,

$$\sigma_{cr} = \frac{\pi^2 E}{(L_e/r)^2} = \frac{\pi^2 (200 \times 10^9)}{(145.3)^2} = 93.5 \text{ MPa}$$

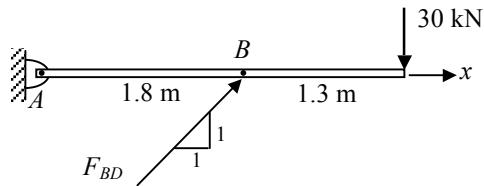

SOLUTION (11.7)


$$\sum M_A = 0 : -30(3.1) + \frac{1}{\sqrt{2}} F_{BD}(1.8) = 0, \quad F_{BD} = 73.1 \text{ kN}$$

$$I = b^4/12 = 50^4/12 = 520.8 \times 10^3 \text{ mm}^4, \quad A = 50 \times 50 = 2.5 \times 10^3 \text{ mm}^2$$

$$r = \sqrt{\frac{I}{A}} = 14.4 \text{ mm} \quad \frac{L}{r} = \frac{1800}{14.4} = 125$$

So,

$$\sigma_{cr} = \frac{\pi^2 E}{(L/r)^2} = \frac{\pi^2 (210 \times 10^9)}{(125)^2} = 132.6 \text{ MPa}$$

We have

$$\sigma_{cr} < \sigma_{yp} \quad (\text{solution is valid})$$

$$(F_{BD})_{cr} = 132.6 \times 10^6 (2.5 \times 10^{-3}) = 331.5 \text{ kN}$$

and

$$n = \frac{(F_{BD})_{cr}}{F_{BD}} = \frac{331.5}{73.1} = 4.5$$



SOLUTION (11.8)

A solid circular section of diameter d:

$$A = \frac{\pi}{4} d^2 \quad I = \frac{\pi}{64} d^4 \quad r = \sqrt{\frac{I}{A}} = \frac{d}{4}$$

Using Eq. (11.13a), we have

$$\frac{4P_{cr}}{\pi d^2} = \sigma_{yp} - \frac{1}{E} \left(\frac{\sigma_{yp}}{2\pi} \frac{4L_e}{d} \right)^2$$

Solving,

$$d = 2 \left(\frac{P_{cr}}{\pi \sigma_{yp}} + \frac{\sigma_{yp}^2 L_e^2}{\pi^2 E} \right)^{1/2} \quad \text{Q.E.D.}$$



A rectangular section of height h and width b:

$$A = bh \quad I = \frac{1}{12} bh^3 \quad r^2 = \frac{h^2}{12}$$

By Eq. (11.13a), we obtain

$$\frac{P_{cr}}{bh} = \sigma_{yp} - \frac{1}{E} \left(\frac{\sigma_{yp}}{2\pi} \frac{\sqrt{12} L_e}{h} \right)^2$$

(CONT.)

11.8 (CONT.)

from which

$$b = \frac{P_{cr}}{h\sigma_{yp}(1 - \frac{3L_e^2\sigma_{yp}}{\pi^2 Eh^2})} \quad \text{Q.E.D.}$$



It is assumed that $h \leq b$.

SOLUTION (11.9)

$$\sigma_{all} = \frac{P}{A} = \frac{90 \times 10^3}{3 \times 10^{-3}} = 30 \text{ MPa} \quad (1)$$

$$C_c = \sqrt{\frac{2\pi^2(200 \times 10^9)}{250 \times 10^6}} = 125.7$$

Assuming $L/r \geq C_c$, use Eq. (11.8) and (1):

$$\sigma_{all} = \frac{\pi^2(200 \times 10^9)}{1.92(L/r)^2} = 30 \times 10^6, \quad \frac{L}{r} = 185$$

Our assumption was correct. Hence,


$$L = (185)r = (185)(25) = 4,625 \text{ mm}$$

or

$$L = 4,625 \text{ m}$$



SOLUTION (11.10)

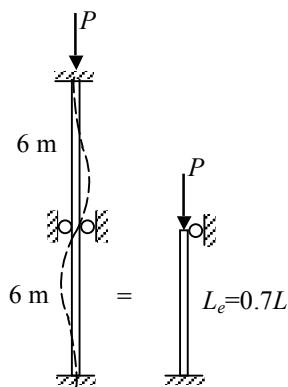

$$C_c = \sqrt{\frac{2\pi^2(210 \times 10^9)}{280 \times 10^6}} = 121.7$$

$$\frac{L_e}{r} = \frac{4.2}{0.1} = 42$$

Since $L/r_y < C_c$, use Eq. (11.9) and (11.8):


$$n = \frac{5}{3} + \frac{3}{8} \left(\frac{42}{121.7} \right) - \frac{1}{8} \left(\frac{42}{121.7} \right)^3 = 1.75$$

$$\sigma_{all} = \frac{1 - (42)^2/[2(121.7)^2]}{1.75} (280 \times 10^6) = 150.5 \text{ MPa}$$

So,

$$P_{all} = 150.5(27 \times 10^3) = 4063 \text{ kN}$$

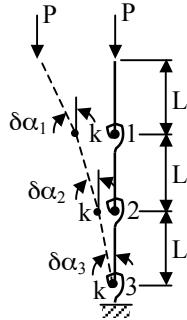

SOLUTION (11.11)


The moment expression about joints 1 and 2:

$$\begin{aligned}\sum M_1 &= 0; \quad PL\delta\alpha_1 - k(\delta\alpha_1 - \delta\alpha_2) = 0 \\ \sum M_2 &= 0; \quad PL(\delta\alpha_1 - \delta\alpha_2) - k(\delta\alpha_2 - \delta\alpha_3) = 0\end{aligned}$$

or, in general,

$$PL\left(\sum_{i=1}^n \delta\alpha_i\right) - k\delta\alpha_n = 0 \quad (\text{P11.11})$$

In matrix form, we have

$$\begin{bmatrix} PL - k & k & 0 & 0 & \cdots & 0 \\ PL & PL - k & k & 0 & \cdots & 0 \\ \cdot & \cdot & \cdot & \cdot & \cdots & \cdot \\ \cdot & \cdot & \cdot & \cdot & \cdots & \cdot \\ PL & PL & PL & PL & \cdots & PL - k \end{bmatrix} \begin{Bmatrix} \delta\alpha_1 \\ \delta\alpha_2 \\ \vdots \\ \delta\alpha_n \end{Bmatrix} = \begin{Bmatrix} 0 \\ 0 \\ \vdots \\ 0 \end{Bmatrix}$$

That is

$$[A]\{\delta\alpha\} = \{0\}$$

Determinant $|A| = 0$, yields P_{cr} . In our case, $n = 3$.

SOLUTION (11.12)

(a) P_{cr} is proportional to I . We have

$$\begin{aligned}I_s &= \frac{\pi r^4}{4} \\ I_h &= \frac{\pi}{4} \left[r^4 - \left(\frac{r}{2}\right)^4 \right] = \frac{15}{16} \frac{\pi r^4}{4} = \frac{15}{16} I_s\end{aligned}$$

Thus, reduction in P_{cr} is 6.25 %

(b) Substituting the given data:

$$\begin{aligned}I_h &= \frac{15\pi(0.015)^4}{64} = 37.276(10^{-9}) \text{ m}^4 \\ P_{cr} &= \frac{\pi^2 EI_h}{L_e^2} = \frac{\pi^2 (110 \times 10^9) (37.276 \times 10^{-9})}{(1.5)^2} = 17.99 \text{ kN}\end{aligned}$$



SOLUTION (11.13)

(a) $P_{cr} = 2(100) = 200 \text{ kN}$

$$I = \frac{P_{cr}L^2}{\pi^2 E} = \frac{200(10^3)(2)^2}{\pi^2(11 \times 10^9)} = 7.369(10^6) \text{ mm}^4$$

$$\frac{a^4}{12} = 7.369(10^6); \quad a = 96.97 \text{ mm}$$

We have

$$\sigma = \frac{P}{A} = \frac{100(10)^3}{(0.09697)^2} = 10.63 \text{ MPa} < 15 \text{ MPa}$$

Thus, a cross section of $97 \times 97 \text{ mm}$ is acceptable. ◀

(b) $P_{cr} = 2(200) = 400 \text{ kN}$

$$I = \frac{400(10^3)(2)^2}{\pi^2(11 \times 10^9)} = 14.738(10^6) \text{ mm}^4; \quad a = 115.32 \text{ mm}$$

We obtain

$$\sigma = \frac{P}{A} = \frac{200(10)^3}{(0.11532)^2} = 15.04 \text{ MPa} > 15 \text{ MPa}$$

Dimension is *not* acceptable. Therefore,

$$a^2 = A = \frac{200(10)^3}{15(10^6)}, \quad a = 115.5 \text{ mm}$$

Use a cross section of

$$116 \times 116 \text{ mm} \quad \blacktriangleleft$$

SOLUTION (11.14)

We have

$$I = \frac{1(50)^4}{12} = 0.521 \times 10^6 \text{ mm}^4.$$

Hence

$$P_{cr} = \frac{\pi^2 EI}{L^2} = \frac{\pi^2(200 \times 10^3)(0.521)}{(3)^2} = 114.3 \text{ kN}$$

$$P_{all} = \frac{P_{cr}}{n} = \frac{114.3}{2.2} = 52 \text{ kN}$$

Thus

$$F = \frac{P_{all}}{2.5} = \frac{52}{2.5} = 20.8 \text{ kN} \quad \blacktriangleleft$$

SOLUTION (11.15)

(a) Using Eq. (11.5),

$$P_{cr} = \frac{\pi^2(210 \times 10^9)(0.075 \times 0.05^3/12)}{0.49(3.6)^2(2)} = 127.5 \text{ kN}$$

$$\sigma_{cr} = \frac{127.5(10^3)}{3.79(10^{-3})} = 34 \text{ MPa} \quad \blacktriangleleft$$

(b) We have

$$I_{min} = \frac{0.075(0.05)^3}{12}$$

and

$$r^2 = \frac{I_{min}}{A} = 2.08(10^{-4})$$

(CONT.)

11.15 (CONT.)

Thus,

$$\frac{L_e}{r} = \frac{0.7L}{r} = \frac{0.7(3.6)}{0.0144} = 175$$

$$\text{Also, } C_c = \left[\frac{2\pi^2 E}{\sigma_{yp}} \right]^{\frac{1}{2}} = 121.673$$

As $121.673 < 175$, use Eq. (11.13):


$$\sigma_{all} = \frac{\pi^2 (210 \times 10^9)}{1.92(175)^2} = 35.25 \text{ MPa}$$

Note that

$$\sigma = \frac{P}{A} = \frac{450(10^3)}{(0.05)(0.075)} = 120 \text{ MPa}$$

and yielding does *not* occur. But member fails as a column, since $P_{cr} < P$. ◀

SOLUTION (11.16)

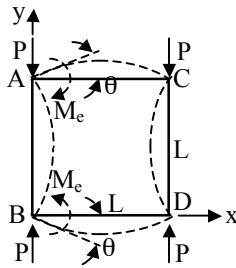

Symmetrical buckling shown in the figure, creates relative bending moments M_e which resist free rotation of the ends of the member AB and CD. Thus, for member AB:

$$EI \frac{d^2v}{dx^2} = -Pv + M_e$$

with the general solution

$$v = C_1 \cos \lambda x + C_2 \sin \lambda x + \frac{M_e}{P} \quad (\text{a})$$

$$\text{where, } \lambda^2 = \frac{P}{EI}$$

Boundary conditions are

$$v(0) = 0 \quad v'(\frac{L}{2}) = 0$$

$$v'(0) = \theta = \frac{M_e L}{2EI}$$

Introducing v from Eq. (a) into these:

$$C_1 + \frac{M_e}{P} = 0, \quad -C_1 \lambda \sin \frac{\lambda L}{2} + C_2 \lambda \cos \frac{\lambda L}{2} = 0$$

$$C_2 \lambda = \frac{M_e L}{2EI}$$

The foregoing lead to the following transcendental equation

$$\tan \frac{\lambda L}{2} + \frac{PL}{2\lambda EI} = 0$$

or

$$\tan \frac{\lambda L}{2} + \frac{\lambda L}{2} = 0$$

from which $\lambda L/2 = 2.029$. Thus,

$$P_{cr} = \frac{16.47 EI}{L^2} = \frac{\pi^2 EI}{(0.774L)^2}$$

The effective length in the situation described is therefore equal to $0.774L$. ◀

SOLUTION (11.17)

Let

$$\lambda_1 = \frac{P}{EI}$$

$$\lambda_2 = \frac{M}{EI}$$

The governing differential equation is


$$EIv'' = M - Pv$$

or

$$v'' + \lambda_1 v = \lambda_2^2$$

Solution is

$$v = A \cos \lambda_1 x + B \sin \lambda_2 x + \left(\frac{\lambda_2}{\lambda_1}\right)^2$$

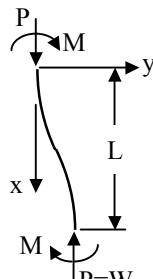

Boundary conditions give:

$$v'(0) = 0 = B$$

$$v(0) = A + \left(\frac{\lambda_2}{\lambda_1}\right)^2 = 0; \quad A_1 = -\left(\frac{\lambda_2}{\lambda_1}\right)^2$$

$$v'(L) = \left(\frac{\lambda_2}{\lambda_1}\right)^2 \sin \lambda_1 L = 0$$

or $\sin \lambda_1 L = 0; \quad \lambda_1 L = 0, \pi, 2\pi, \dots$

Choose $\lambda_1 L = \pi$. Then,

$$\lambda_1 = \frac{\pi}{L} = \left(\frac{P}{EI}\right)^{\frac{1}{2}}; \quad P = \frac{\pi^2 EI}{L^2}$$

Thus, $L_e = L$



SOLUTION (11.18)

For the vertical bar, from Eq. (11.5):

$$P_{cr} = \frac{\pi^2 EI}{4L}$$

The midspan deflection of the beam is thus

$$\delta = \frac{5PL^4}{384EI} - \frac{P_0L^3}{48EI}$$

or

$$\delta = \frac{5PL^4}{384EI} - \frac{\pi^2 L}{192} = \frac{L}{192} \left(\frac{5PL^3}{2EI} - \pi^2 \right)$$



SOLUTION (11.19)

(a) We have $\alpha(\Delta T)L = \delta/2$

or $\Delta T = \frac{\delta}{2\alpha L}$



(b) $\alpha(\Delta T)L - \frac{PL}{AE} = \frac{\delta}{2}$


where

$$P = \frac{\pi^2 EI}{4L^2}$$

Thus,

$$\Delta T = \frac{\delta}{2\alpha L} + \frac{\pi^2 EI}{4L^2} \frac{L}{AE} \frac{1}{\alpha L} = \frac{\delta}{2\alpha L} + \frac{\pi^2 I}{4L^2 A \alpha}$$

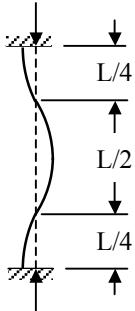

SOLUTION (11.20)


For a fixed ended column L_e may be determined as follows. Inflection points and midpoint divide the bar into 4 equal portions. Each portion is the same as the fundamental case (Fig. 11.2a). Thus $L_e = L/4$.

For the dimension given, we obtain

$$\frac{L}{r} = \frac{1.932}{0.0294} = 65.99$$

Equation (11.6) gives then

$$\sigma_{cr} = \frac{4\pi^2 E}{(L/r)^2} = 0.0091E$$

Substituting $E = 174(10^9)$,

$$\sigma_{cr} = 0.0091(175 \times 10^9) = 1592.5 \text{ MPa}$$

Since, from Fig. P11.20, E is valid only up to 175 MPa, the 1592.5 MPa cannot be critical stress.

Similarly, for inelastic range, from Eq. (11.7):

$$\begin{aligned} \sigma_{cr} &= 0.0091E_{t1} \\ &= 0.0091(46.7 \times 10^9) = 425 \text{ MPa} \end{aligned}$$

Applying the same reasoning as before, this value is also not a critical stress.


For E_{t2} :

$$\sigma_{cr} = 0.0091(28 \times 10^9) = 254.8 \text{ MPa}$$

We now observe from the sketch that 254.8 falls in the stress range for which E_{t2} is valid. Thus, the buckling load:

$$P_t = \sigma_{cr}A = 254.8(0.0323) = 823 \text{ kN}$$



SOLUTION (11.21)


For bar AB:

$$1.41P = 4200(5.4 \times 10^{-5}) = 2268$$

(CONT.)

11.21 (CONT.)

$$\text{or } P = 1604 \text{ N}$$

For bar BC:

$$P = P_{cr} = \frac{\pi^2 EI}{L^2} = \frac{\pi^2 (210 \times 10^9)(3.9 \times 10^{-9})}{6.25}$$
$$= 1297 \text{ N}$$

$$\text{And } \sigma_{cr} = \frac{1297}{5.4(10^{-5})} = 24 \text{ MPa}$$

Conclusion: Bar BC fails as a column, $P_{cr} = 1297 \text{ N}$. ◀

SOLUTION (11.22)

Referring to Fig. P11.22, we write

$$I_y = 2Ar_c^2 + 2Ad^2$$
$$= 2(0.0225)^2 + 2(1.719 \times 10^{-3})(0.0125 + 0.2325)^2$$
$$= 6.13(10^{-6}) \text{ m}^4$$

and

$$r_y = \left(\frac{I_y}{2A}\right)^{\frac{1}{2}} = (r_c^2 + d^2)^{\frac{1}{2}}$$
$$= (0.0225^2 + 0.03575^2)^{\frac{1}{2}} = 42.24 \text{ mm}$$

We see that r_y for two channels is the same as for one channel.

But $r_z = r_c = 0.0225 \text{ m}$. Thus, $r_z < r_y$. Columns tends to buckle with respect to z axis.

The slenderness ratios:

$$\frac{L_e}{r_z} = \frac{2.10}{0.0225} \approx 94, \quad \frac{L_e}{r_z} = \frac{4.20}{0.0225} \approx 187$$

From Sec. 11.7:

$$C_c^2 = \frac{2\pi^2 E}{\sigma_{yp}} = \frac{2\pi^2 (210 \times 10^9)}{203(10^6)} = 20,420; \quad C_c = 143$$

- (a) In this case $0 < (L_e/r) < C_c$. Then, substituting the given data, the first of Eqs. (11.8) yields

$$\sigma_{all} = 97.685 \text{ MPa}$$
 ◀

- (b) Now we have: $C_c \leq (L_e/r) \leq 200$ and the second of Eqs. (11.13) gives

$$\sigma_{all} = 30.87 \text{ MPa}$$
 ◀

SOLUTION (11.23)

From Fig. P11.22, we observe that $I_y > I_z$.

Therefore the column buckles with respect to the z axis. Since,

$$\frac{L}{r} = \frac{4.2}{0.0225} = 186.7$$

We obtain

$$\sigma_{cr} = \frac{\pi^2 E}{(L_e/r)^2} = \frac{\pi^2 (210 \times 10^9)}{(186.7)^2} = 59.46 \text{ MPa}$$
 ◀

SOLUTION (11.24)

From Eq. (11.6),

$$\left(\frac{L}{r}\right)_{\text{limit}} = \left[\frac{\pi^2(140 \times 10^9)}{280 \times 10^6}\right]^{\frac{1}{2}} = 70.2$$

We have

$$I = \frac{bh^3}{12} = Ar^2$$

$$\text{or } I = \frac{(0.05)(0.025)^3}{12} = 1.25 \times 10^{-3} r^2$$

$$\text{Solving, } r = 7.216 \text{ mm}$$

$$\text{Hence, } \left(\frac{L}{r}\right)_{\text{actual}} = \frac{1.2}{7.216(10^{-3})} = 166.3$$

Thus, elastic buckling occurs, since $(L/r)_{\text{limit}} < (L/r)_{\text{actual}}$.

We have $\Delta = \alpha(\Delta T)L$ and $\varepsilon = \frac{\Delta}{L} = \alpha(\Delta T)$.

The condition that

$$\varepsilon = \alpha(\Delta T) - \frac{\pi^2}{(L/r)^2} = 0$$

results in

$$\Delta T = \frac{\pi^2}{\alpha(L/r)^2} = \frac{\pi^2}{10(10^{-6})(166.3)^2} = 35.7^\circ C$$



SOLUTION (11.25)

$$\sigma_{\text{all}} = \frac{P}{A} = \frac{125(10^3)}{3.06(10^{-3})} = 40.85 \text{ MPa}$$

$$\text{Also } C_c = \left[\frac{2\pi^2(200 \times 10^9)}{250(10^6)}\right]^{\frac{1}{2}} = 125.7$$

$$\text{Assuming } (L/r) \geq C_c : \sigma_{\text{all}} = \frac{\pi^2(200 \times 10^9)}{1.92(L/r)^2} = \frac{1028.08(10^9)}{(L/r)^2}$$

$$\text{Solving, } \frac{L}{r} = 158.6 \quad \text{O.K.}$$

Choosing the smallest radii of gyration:

$$\frac{L}{r_y} = \frac{L}{0.0246} = 158.6$$

from which

$$L = 3.9 \text{ m}$$



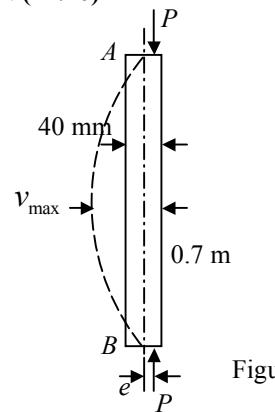
SOLUTION (11.26)


Figure (a)

$$A = \pi(20)^2 = 1256.64 \text{ mm}^2$$

$$I = \frac{\pi}{4}(20)^4 = 125.66 \times 10^3 \text{ mm}^4$$

$$\begin{aligned} P_{cr} &= \frac{\pi^2 EI}{L^2} \\ &= \frac{\pi^2(200 \times 10^9)(125.66 \times 10^{-9})}{(0.7)^2} \\ &= 506.2 \text{ kN} \end{aligned}$$

(CONT.)

11.26 (CONT.)

(a) Using Eq. (11.18):

$$1 \times 10^{-3} = e \left[\sec \left(\frac{\pi}{2} \sqrt{\frac{60}{506.2}} \right) - 1 \right] = e [\sec(31^\circ) - 1], \quad e = 6 \text{ mm}$$



(b) Referring to Fig. (a):

$$M = P(v_{\max} + e) = 80(1 + 6) = 560 \text{ N}\cdot\text{m}$$

$$\begin{aligned} \text{Hence, } \sigma_{\max} &= \frac{P}{A} + \frac{Mc}{I} = \frac{80 \times 10^3}{1256.64 \times 10^{-6}} + \frac{560(20)10^{-3}}{125.66 \times 10^{-9}} \\ &= 63.66 + 89.13 = 152.8 \text{ MPa} \end{aligned}$$



SOLUTION (11.27)

$L_e = 2L = 1.4 \text{ m}$. Refer to solution of Prob. 11.26

$$P_{cr} = \frac{\pi^2 EI}{L_e^2} = \frac{\pi^2 (200 \times 10^9)(125.66 \times 10^{-9})}{(1.4)^2} = 126.6 \text{ kN}$$

(a) Equation (11.18):

$$1 \times 10^{-3} = e \left[\sec \left(\frac{\pi}{2} \sqrt{\frac{60}{126.6}} \right) - 1 \right] = e [\sec(62^\circ) - 1], \quad e = 0.88 \text{ mm}$$




(b) $M = P(v_{\max} + e) = 80(1 + 0.88) = 150.4 \text{ N}\cdot\text{m}$. Therefore,

$$\sigma_{\max} = \frac{P}{A} + \frac{Mc}{I} = 63.66 + \frac{150.4(20 \times 10^{-3})}{125.66 \times 10^{-9}} = 63.66 + 23.9 = 87.6 \text{ MPa}$$




SOLUTION (11.28)



$$L_e = 2L = 3.6 \text{ m}$$

$$\begin{aligned} A &= 200 \times 100 - 160 \times 60 \\ &= 10.4 \times 10^3 \text{ mm}^2 \end{aligned}$$

$$\begin{aligned} I &= \frac{1}{12} (200 \times 100^3 - 160 \times 60^3) \\ &= 13.79 \times 10^6 \text{ mm}^4 \end{aligned}$$

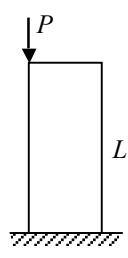

$$r = \sqrt{I/A} = 36.4 \text{ mm}$$

$$e = c = 50 \text{ mm}$$

Thus,

$$\frac{ec}{r^2} = \frac{50 \times 50}{(36.4)^2} = 1.89 \quad \frac{L_e}{2r} = \frac{3.6}{2 \times 36.4} = 49.45$$


(CONT.)

11.28 (CONT.)

Use Eq.(11.19) with $L = L_e$:

$$\sigma_{\max} = \frac{250 \times 10^3}{10.4 \times 10^{-3}} \left[1 + 1.89 \sec \left(49.45 \sqrt{\frac{250 \times 10^3}{70 \times 10^9 (10.4 \times 10^{-3})}} \right) \right] = 98.7 \text{ MPa} \quad \blacktriangleleft$$

SOLUTION (11.29)

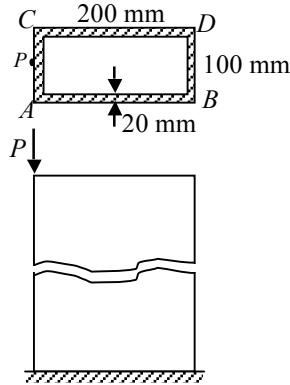

$$L_e = 2L = 3.6 \text{ m}$$

$$A = 200 \times 100 - 160 \times 60 \\ = 10.4 \times 10^3 \text{ mm}^2$$

$$I = \frac{1}{12} (100 \times 200^3 - 60 \times 160^3) \\ = 46.19 \times 10^6 \text{ mm}^4$$

$$e = c = 100 \text{ mm}$$

$$r = \sqrt{I/A} = 66.6 \text{ mm}$$

Therefore,

$$\frac{ec}{r^2} = \frac{100 \times 100}{(66.6)^2} = 2.25 \quad \frac{L_e}{2r} = \frac{3.6}{2 \times 66.6} = 27.03$$

Apply Eq.(11.19) with $L = L_e$:

$$\sigma_{\max} = \frac{250 \times 10^3}{10.4 \times 10^{-3}} \left[1 + 2.25 \sec \left(27.03 \sqrt{\frac{250 \times 10^3}{70 \times 10^9 (10.4 \times 10^{-3})}} \right) \right] = 85.7 \text{ MPa} \quad \blacktriangleleft$$

SOLUTION (11.30)

$$I = \frac{1}{12} (50)(25)^3 = 65.1 \times 10^3 \text{ mm}^4$$

$$P_{cr} = \frac{\pi^2 EI}{L^2} = \frac{\pi^2 (210)(65.1)}{(1.5)^2} = 59.97 \text{ kN}$$

$$e = \frac{h}{2} = \frac{25}{2} = 12.5 \text{ mm}, \quad P = 10 \text{ kN}$$

Equation (11.13) gives

$$v_{\max} = 0.0125 \left[\sec \left(\frac{\pi}{2} \sqrt{\frac{10}{59.97}} \right) - 1 \right] = 3.10 \text{ mm} \quad \blacktriangleleft$$

Thus

$$M_{\max} = P(e + v_{\max}) = 10(12.5 + 3.10) = 156 \text{ N} \cdot \text{m} \quad \blacktriangleleft$$

SOLUTION (11.31)

$$p = 77(10^3)(0.05 \times 0.05) = 192.5 \text{ N/m}$$

$$I = \frac{(0.05)^4}{12} = 5.2(10^{-7}) \text{ m}^4$$

(a) $\sigma_{\max} = \frac{Mc}{I} = \frac{192.5(9)^2}{8} \frac{0.025}{5.2(10^{-7})} = 93.705 \text{ MPa}$

$$\nu_{\max} = \frac{5pL^4}{384EI}$$

$$= \frac{5(192.5)(9)^4}{384(210 \times 10^9)(5.2 \times 10^{-7})} = 0.1506 \text{ m} = 150.6 \text{ mm}$$

(b) Taking

$$a_0 = \frac{5pL^4}{384EI} = 150.6 \text{ mm}$$

We obtain, using Eq. (11.15):

$$\nu_{\max} = \frac{0.1506}{1 - \frac{4500(9)^2}{(210 \times 10^9)(5.2 \times 10^{-7})}} = 227.5 \text{ mm}$$

Applying Eq. (11.16):

$$\sigma_{\max} = \frac{4500}{0.025} [1 + 2275 \frac{0.025}{5.2(10^{-7})/0.025}]$$

$$= 51.019 \text{ MPa}$$

SOLUTION (11.32)

Given $e=0.05 \text{ m}$, $c=0.1016 \text{ m}$

and $r_z^2 = \frac{I_z}{A}$

$$= \frac{45.66}{5880} = 7.765(10^{-3}) \text{ mm}$$

Then, $P_{cr} = \frac{\pi^2 EI_y}{L^2} = \frac{\pi^2 (210 \times 10^9) 15.4}{(4.5)^2} = 1575 \text{ kN}$

Also,

$$P_{cr} = \frac{\pi^2 (210 \times 10^9) 45.66}{(4.5)^2} = 4669 \text{ kN}$$

Thus, Eq. (11.19) becomes

$$210(10^6) = \frac{P}{588(10^{-6})} [1 + \frac{0.05(0.1016)}{7.765(10^{-3})} \sec(\frac{\pi}{2} \sqrt{\frac{P}{4669 \times 10^3}})]$$

from which, by trial and error,

$$P \approx 700 \text{ kN} = P_{\max}$$

SOLUTION (11.33)

Governing equation is

$$EIv_1'' = -(v_0 + v_1)$$

where,

$$v_0 = a_1 \sin \frac{\pi x}{L} + 5a_1 \sin \frac{2\pi x}{L}$$

This may be written

$$v_1'' + \lambda^2 v_1 = -\lambda^2 a_1 \sin \frac{\pi x}{L} - 5\lambda^2 a_1 \sin \frac{2\pi x}{L}$$

(a)

(CONT.)

11.33 (CONT.)

We have

$$v_1 = c_1 \cos \lambda x + c_2 \sin \lambda x + v_p \quad (\text{b})$$

Particular solution is

$$v_p = A \sin \frac{\pi x}{L} + B \cos \frac{\pi x}{L} + D \sin \frac{2\pi x}{L} + E \cos \frac{2\pi x}{L} \quad (\text{c})$$

Substituting Eq. (c) into Eq. (a):

$$A = \frac{\lambda^2 a_1}{(\frac{\pi^2}{L^2} - \lambda^2)} \quad B = 0$$

$$D = \frac{5\lambda^2 a_1}{(\frac{4\pi^2}{L^2} - \lambda^2)} \quad E = 0$$

$$\text{Thus, } v_p = \frac{\lambda^2 a_1}{(\pi/L)^2 - \lambda^2} \sin \frac{\pi x}{L} + \frac{5\lambda^2 a_1}{4(\pi/L)^2 - \lambda^2} \sin \frac{2\pi x}{L}$$

Boundary conditions

$$v_1(0) = 0 \quad v_1(L) = 0$$

yield $c_1 = c_2 = 0$.

General solution is

$$v = v_1 + v_p = v_0 + v_p$$

$$\text{Letting } b = \frac{\pi^2}{\lambda^2 L^2} = \frac{PL^2}{\pi^2 EI}$$

we obtain

$$v = \frac{a_1}{1-b} \sin \frac{\pi x}{L} + \frac{20a_1}{4-b} \sin \frac{2\pi x}{L}$$

Solution of the b is found from

$$v\left(\frac{3L}{4}\right) = 0 = \frac{a_1}{1-b} \sin \frac{\pi(3L/4)}{L} + 20 \frac{a_1}{1-b} \sin \frac{2\pi(3L/4)}{L}$$


$$\text{or } b = 0.89$$

$$\text{Thus, } b = \frac{PL^2}{\pi^2 EI}, \quad P = \frac{b\pi^2 EI}{L^2}$$

$$\text{and } P = 0.89 \frac{\pi^2 EI}{L^2}$$



SOLUTION (11.34)

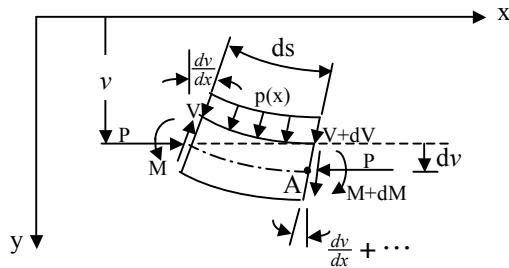

An element isolated from the beam is shown in a deformed state in the figure above.

Assume $\sin \theta \approx \theta$, $\cos \theta \approx 1$, and $ds \approx dx$. Then

$$\sum F_y = 0 : -V + pbx + (V + dV) = 0$$

$$\text{or } p = -\frac{dV}{dx}$$

(a)

(CONT.)

11.34 (CONT.)

$$\sum M_A = 0 : \quad M - Pdv - Vdx + pdx \frac{dx}{2} - (M + dM) = 0$$

Neglecting terms of second order, this becomes

$$V = -\frac{dM}{dx} - P \frac{dv}{dx} \quad (b)$$

If the shear and axial deformations are neglected, the moment at any point is

$$M = EI \frac{d^2v}{dx^2} \quad (c)$$

Substituting of Eqs. (c) and (b) into Eq. (a) gives

$$\frac{d^2}{dx^2} (EI \frac{d^2v}{dx^2}) + P \frac{d^2v}{dx^2} = p \quad (d)$$

For $EI = \text{constant}$,

$$\frac{d^2v}{dx^2} + \frac{P}{EI} \frac{d^2v}{dx^2} = \frac{p}{EI} \quad (e)$$

Homogeneous solution of this equation is

$$v = c_1 \sin \sqrt{\frac{P}{EI}} x + c_2 \cos \sqrt{\frac{P}{EI}} x + c_3 + c_4$$

where, c_1 through c_4 will require for evaluation, four boundary conditions.

SOLUTION (11.35)

$$\text{Given } v = a_0 \left[1 - \left(\frac{4x^2}{L^2} \right) \right]$$

and hence,

$$v' = -\frac{8xa_0}{L^2} \quad v'' = -\frac{8a_0}{L^2}$$

Potential energy function is

$$\Pi = 2 \int_0^{L/2} \frac{1}{2} EI(v')^2 dx - 2 \int_0^{L/2} \frac{1}{2} P(v')^2 dx = \frac{32Ela_0^2}{L^3} - \frac{32}{12} \frac{Pa_0^2}{L}$$

$$\text{Thus, } \frac{\delta \Pi}{\delta a_0} = \frac{64Ela_0}{L^3} \frac{64}{12} \frac{Pa_0}{L} = 0$$

$$\text{or } P_{cr} = \frac{12EI}{L^2}$$



SOLUTION (11.36)

Assume $v = v_0 \sin(\frac{\pi x}{L})$. Then,

$$\begin{aligned} U &= 2 \int_0^{L/2} EI_1 \left(1 + \frac{x}{L/2} \right) (v'')^2 dx \\ &= 2EI_1 v_0'' \frac{\pi^4}{L^4} \left[\int_0^{L/2} \sin^2 \frac{\pi x}{L} dx + \frac{2}{L} \int_0^{L/2} x \sin^2 \frac{\pi x}{L} dx \right] \\ &= 2EI_1 v_0^2 \frac{\pi^4}{L^4} \left[\frac{L}{4} + \frac{2L}{\pi^2} \left(\frac{\pi^2}{16} + \frac{1}{4} \right) \right] \end{aligned} \quad (a)$$

We also have

$$\int_0^L (v')^2 dx = v_0^2 \frac{\pi^2}{L^2} \int_0^L \cos^2 \frac{\pi x}{L} dx = \frac{v_0^2 \pi^2}{2L}$$

Thus,

$$\int_0^L EI(v'')^2 dx = P \int_0^L (v')^2 dx$$

yields

$$P_{cr} = \frac{\pi^2 EI_1}{L^2} \left(\frac{3}{2} + \frac{2}{\pi^2} \right) = 1.7 \frac{\pi^2 EI}{L^2}$$



SOLUTION (11.37)

We have $v' = 2v_1 \frac{x}{L^2}$ $v'' = 2 \frac{v_1}{L^2}$

Potential energy function is

$$\Pi = \frac{EI_1}{2} \int_0^L \left(1 - \frac{x}{2L}\right) \frac{4v_1^2}{L^4} dx - \frac{P}{2} \int_0^L \frac{4v_1^2}{L^4} x^2 dx = \frac{3}{2} \frac{EI_1 v_1^2}{L^3} - \frac{2}{3} \frac{v_1^2 P}{L}$$

Hence, $\frac{\delta \Pi}{\delta v_1} = \frac{3EI_1 v_1}{L^3} - \frac{4v_1 P}{3L} = 0$

gives

$$P_{cr} = \frac{9EI_1}{4L^2}$$



SOLUTION (11.38)

Assume $v = \sum_1^\infty a_n \sin\left(\frac{n\pi x}{L}\right)$. Then,

$$U = \frac{\pi^4 EI}{4L^3} \sum n^4 a_n^2$$

and
$$W = \frac{1}{2} \int_0^L P(v')^2 dx + \int_0^L P v dx \\ = \frac{\pi^2 P}{4L} \sum n^2 a_n^2 + \frac{2PL}{\pi} \sum a_n \frac{1}{n}$$

Hence, from $\delta U = \delta W$, by letting

$$b = \frac{P}{P_{cr}} = \frac{PL^2}{\pi^2 EI}$$


we obtain

$$a_n = \frac{4PL^4}{\pi^5 EI} \sum_{1,3,\dots}^\infty \frac{1}{n^3(n^2-b)}$$

Thus,

$$v = \frac{4PL^4}{\pi^5 EI} \sum_{1,3,\dots}^\infty \frac{1}{n^3(n^2-b)} \sin \frac{n\pi x}{L}$$

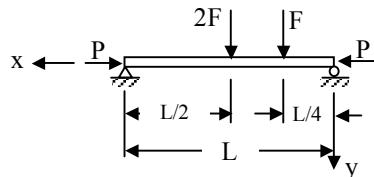

SOLUTION (11.39)


Let $c_1 = \frac{L}{4}$ and $c_2 = \frac{L}{2}$. Deflection curve is expressed by

$$v = \sum_1^\infty a_n \sin \frac{n\pi x}{L} \quad (a)$$

and
$$U = \frac{EI}{2} \int_0^L (v')^2 dx \\ = F \sum a_n \sin \frac{n\pi c_1}{L} + 2F \sum a_n \sin \frac{n\pi c_2}{L} + \frac{P}{2} \int_0^L (v')^2 dx$$

(CONT.)

11.39 (CONT.)

Therefore,

$$\frac{\partial(U-W)}{\partial a_n} = 0$$

gives

$$\frac{\pi^4 EI}{2L^3} n^4 a_n \delta a_n = F \delta a_n \sin \frac{n\pi c_1}{L} + 2F \delta a_n \sin \frac{n\pi c_2}{L} + \frac{P\pi^2}{2L} a_n n^2$$


or

$$a_n = \frac{F \sin(n\pi/4) + 2F \sin(n\pi/2)}{\frac{\pi^2 EI n^2}{2L^3} (n^2 - \frac{P}{P_{cr}})}$$



Solution is found by substituting this into Eq. (a).

SOLUTION (11.40)

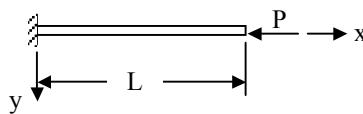

Boundary conditions are: $v(0) = v(L) = 0$

We have

$$v = aLx^2 + bLx^3 - ax^3 - bx^4$$

Thus,

$$v' = 2aLx + 3bLx^2 - 3ax^2 - 4bx^3$$

$$v'' = 2aL + 6BLx - 6ax - 12bx^2$$

Hence,

$$\begin{aligned}\Pi &= \frac{EI}{2} \int_0^L (v'')^2 dx - \frac{P}{2} \int_0^L (v')^2 dx \\ &= \frac{EI}{2} [4a^2 L^3 + 8abL^4 + \frac{24}{5} b^2 L^5] - \frac{P}{2} [\frac{2}{15} a^2 L^5 + \frac{1}{5} abL^6 + \frac{3}{35} b^2 L^7]\end{aligned}$$

It is required that

$$\frac{\partial \Pi}{\partial a} = \frac{EI}{2} (8aL^3 + 8abL^4) - \frac{P}{2} (\frac{4}{15} aL^5 + \frac{bl^6}{5}) = 0$$

$$\frac{\partial \Pi}{\partial b} = \frac{EI}{2} (8aL^4 + \frac{48}{5} bL^5) - \frac{P}{2} (\frac{1}{5} aL^6 + \frac{bl^7}{35}) = 0$$

Letting $\lambda = \frac{PL^2}{EI}$, these become

$$(4 - \frac{2\lambda}{35})a + (4 - \frac{\lambda}{10})bL = 0$$

$$(4 - \frac{\lambda}{10})a + (\frac{24}{5} - \frac{3\lambda}{35})bL = 0$$

Since $a \neq 0$ and $b \neq 0$:

$$-(4 - \frac{\lambda}{10})^2 + (4 - \frac{2\lambda}{35})(\frac{24}{5} - \frac{3\lambda}{35}) = 0$$

or

$$\lambda^2 - 128\lambda + 2240 = 0$$


Solving,

$$\lambda_1 = 20.9 \quad \lambda_2 = 107.1$$

Hence,

$$P_{cr} = \frac{20.9 EI}{L} = 2.12 \frac{\pi^2 EI}{L^2}$$

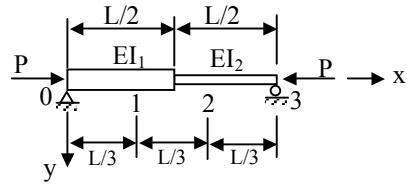

SOLUTION (11.41)


From Eq. (11.29):

$$v_{m+1} + (\lambda_1 h^2 - 2)v_m + v_{m-1} = 0 \quad (a)$$

Here

$$\lambda_1^2 = \frac{P}{EI_1} \quad \lambda_2^2 = \frac{P}{EI_2}$$

Applying Eq. (a) at 1 and 2:

$$\begin{bmatrix} \lambda_1 h^2 - 2 & 1 \\ 1 & \lambda_2 h^2 - 2 \end{bmatrix} \begin{Bmatrix} v_1 \\ v_2 \end{Bmatrix} = \begin{Bmatrix} 0 \\ 0 \end{Bmatrix}$$

Thus,

$$(\lambda_1 h^2 - 2)(\lambda_2 h^2 - 2) - 1 = 0$$

or

$$\lambda_1 \lambda_2 h^4 - 2\lambda_1 h^2 - 2\lambda_2 h^2 + 3 = 0$$

This is written as

$$P^2 \left[\frac{L^4}{81E^2 I_1 I_2} \right] - P \left[\frac{2L^2}{9EI_1} + \frac{2L^2}{9EI_2} \right] + 3 = 0$$


Solution is

$$(P_{1,2})_{cr} = \frac{9E}{L^2} (I_1 + I_2) \pm \frac{9E}{L^2} [I_1^2 - I_1 I_2 + I_2^2]^{\frac{1}{2}}$$

When $I_1 = I_2$:

$$P_{cr} = \frac{9EI}{L^2}$$

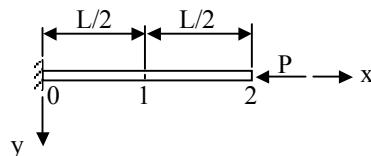

SOLUTION (11.42)


Boundary conditions yield

$$v'(0) = 0; \quad v_0 = 0$$

$$v(0) = 0; \quad v_1 = v_{-1}$$

$$v''(L) = 0; \quad v_3 - 2v_2 + 2v_1 = 0 \quad (1)$$

$$v'''(L) = 0; \quad v_4 - 2v_3 + 2v_1 = 0 \quad (2)$$

(CONT.)

 11.42 (CONT.)

Then, applying Eq. (1) of Example 11.8 at points 1, 2, 0, respectively:

$$(7 - 2\lambda^2 h^2)v_1 + (\lambda^2 h^2 - 4)v_2 + v_3 = 0 \quad (3)$$

$$(\lambda^2 h^2 - 4)v_1 + (6 - 2\lambda^2 h^2)v_2 + (\lambda^2 h^2 - 4)v_3 + v_4 = 0 \quad (4)$$

$$(\lambda^2 h^2 - 4)v_1 + v_2 = 0 \quad (5)$$

From Eq. (5):

$$v_2 = -v_1(\lambda^2 h^2 - 4)$$

Equation (1) becomes

$$v_3 = 2v_1 - v_1 = -2v_1(\lambda^2 h^2 - 4)v_1 - 2v_1(\lambda^2 h^2 - 4) - v_1$$

Substituting this into Eq. (3),

$$(7 - 2\lambda^2 h^2)v_1 - (\lambda^2 h^2 - 4)(\lambda^2 h^2 - 4)v_1 - 2v_1(\lambda^2 h^2 - 4) - v_1 = 0$$

from which

$$\lambda^4 h^4 - 4\lambda^2 h^2 + 2 = 0$$


or

$$\lambda^2 h^2 = 0.59 = \frac{Ph^2}{EI}$$

Thus,

$$P_{cr} = \frac{2.36EI}{L^2}$$

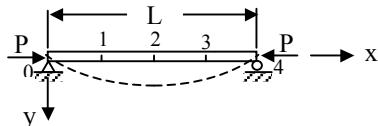

SOLUTION (11.43)


From symmetry: $v_1 = v_3$.

We have

$$I(x) = (1 + \frac{2x}{L})EI_1 \quad 0 \leq x \leq \frac{L}{2}$$

$$I(x) = (3 - \frac{2x}{L})EI_1 \quad \frac{L}{2} \leq x \leq L$$

Equation (11.29), gives at 0, 1, 2, 3:

$$v_1 + v_{-1} = 0; \quad v_1 = -v_{-1}$$

$$v_2 + [\frac{Ph^2}{(3/2)EI_1} - 2]v_1 = 0$$

$$v_1 + [\frac{Ph^2}{EI_1} - 2]v_2 + v_1 = 0$$

$$[\frac{Ph^2}{(3/2)EI_1} - 2]v_1 + v_2 = 0$$

The foregoing equations lead to

$$\begin{bmatrix} \frac{2}{3}\lambda^2 h^2 - 2 & 1 \\ 2 & \frac{1}{2}\lambda^2 h^2 - 2 \end{bmatrix} \begin{Bmatrix} v_1 \\ v_2 \end{Bmatrix} = \begin{Bmatrix} 0 \\ 0 \end{Bmatrix}$$


from which, since $v_1 \neq 0$ and $v_2 \neq 0$:

$$(\lambda^2 h^2 - 6)(\lambda^2 h^2 - 1) = 0$$

Thus,

$$P_{cr} = 16 \frac{EI_1}{L^2}$$

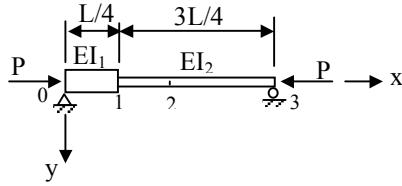

SOLUTION (11.44)


We have

$$\alpha_1 = \frac{L/4}{L/4} = 1 \quad \alpha_2 = \frac{L/2}{L/4} = 2.$$

Applying Eq. (11.30) at 1 and 2:

$$[\frac{PL^2}{16EI_1} - 2]v_1 + v_2 = 0 \quad (a)$$

$$\frac{2}{3}v_1[\frac{PL^2}{16EI_1} - 1]v_2 = 0 \quad (b)$$

Let

$$k_1 = \frac{PL^2}{16EI_1} - 1 \quad k_2 = \frac{PL^2}{16EI_2}$$

Equations (a) and (b) yield then

$$\begin{vmatrix} k_1 - 2 & 1 \\ \frac{2}{3} & k_2 - 1 \end{vmatrix} = 0$$

from which

$$(k_1 - 2)(k_2 - 1) - \frac{2}{3} = 0$$

or

$$P^2 \left[\frac{L^4}{256E^2I_1I_2} \right] - P \left[\frac{2L^2}{16EI_2} + \frac{L^2}{16EI_1} \right] + \frac{4}{3} = 0$$

Solution of this quadratic equation gives the critical load as follows:

$$P_{cr} = \frac{8E(2I_1+I_2)}{L^2} - \frac{8E}{L^2} [4I_1^2 + I_2^2 - 1.24I_1I_2]^{\frac{1}{2}}$$

In a special case, for $I_1 = I_2 = I$, the preceding reduces to

$$P_{cr} = \frac{24EI}{L^2} - \frac{15.3EI}{L^2} = 8.7 \frac{EI}{L^2}$$

◀

End of Chapter 11

CHAPTER 12

SOLUTION (12.1)

Components of stress are

$$\begin{aligned}\sigma_x &= \frac{P}{A} + \frac{Mr}{I} \\ &= \frac{90}{\pi(0.05)^2} + \frac{3375(0.05)}{\pi(0.05)^4/4} = 45.84 \text{ MPa} \\ \tau_{xy} &= \frac{Tr}{J} = \frac{4500(0.05)}{\pi(0.05)^4/2} = 22.92 \text{ MPa}\end{aligned}$$


and

$$\sigma_y = \sigma_z = \tau_{xz} = \tau_{yz} = 0$$

Thus, from Sec. 2.13 (in MPa):

$$\begin{bmatrix} \frac{2\sigma_x}{3} & \tau_{xy} & 0 \\ \tau_{xy} & -\frac{\sigma_x}{3} & 0 \\ 0 & 0 & -\frac{\sigma_x}{3} \end{bmatrix} = \begin{bmatrix} 30.56 & 22.92 & 0 \\ 22.92 & -15.28 & 0 \\ 0 & 0 & -15.28 \end{bmatrix}$$

SOLUTION (12.2)

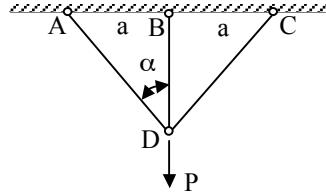

At instability, member AD (or DC) and BD become in length:

$$L'_{AD} = L'_{DC} = L_{AD} + \frac{n_1}{1-n_1} L_{AD} = \frac{L_{AD}}{1-n_1}$$

$$L'_{BD} = L_{BD} + \frac{n_2}{1-n_2} L_{BD} = \frac{L_{BD}}{1-n_2}$$

Therefore,

$$\left(\frac{L_{AD}}{1-n_1}\right)^2 = a^2 + \left(\frac{L_{BD}}{1-n_2}\right)^2 \quad (\text{a})$$

Initially:

$$L_{AD}^2 = a^2 + L_{BD}^2 \quad (\text{b})$$

Eliminating a from Eqs. (a) and (b), we obtain

$$\cos \alpha = \frac{L_{BD}}{L_{AD}} = \left(\frac{1-n_2}{1-n_1}\right) \sqrt{\frac{n_1(2-n_1)}{n_2(2-n_2)}}$$

For

$$n_1 = 0.2 \quad \text{and} \quad n_2 = 0.3$$


We have

$$\cos \alpha = \frac{0.7}{0.8} \left[\frac{0.2(1.8)}{0.3(1.7)} \right]^{\frac{1}{2}} = 0.7351$$

or

$$\alpha = 42.68^\circ$$

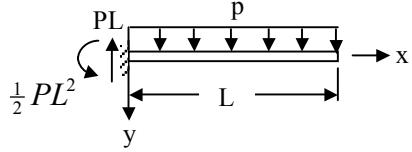

SOLUTION (12.3)


We write

$$M(x) = \frac{1}{2}p(L - x)^2$$

Equation (12.7) is then

$$\begin{aligned} v''' &= \left(\frac{M}{EI_n}\right)^{\frac{1}{n}} = \left(\frac{p}{2KI_n}\right)^{\frac{1}{n}} (L - x)^{\frac{2}{n}} \\ v' &= -\frac{\lambda(L-x)^{\frac{2}{n}+1}}{\left(\frac{2}{n}+1\right)\left(\frac{2}{n}+2\right)} + c_1 \\ v &= \frac{\lambda(L-x)^{\frac{2}{n}+2}}{\left(\frac{2}{n}+1\right)\left(\frac{2}{n}+2\right)} + c_1 x + c_2 \end{aligned} \quad (a)$$

Boundary conditions yield

$$v'(0) = 0; \quad c_1 = \frac{\lambda L^{\frac{2}{n}+1}}{\frac{2}{n}+1} \quad v(0) = 0; \quad c_2 = -\frac{\lambda L^{\frac{2}{n}+2}}{\left(\frac{2}{n}+1\right)\left(\frac{2}{n}+2\right)}$$


Substituting these and Eq. (g) of Sec. 12.5 into Eq. (a), we obtain

$$v = \left(\frac{p}{2K-n}\right)^{\frac{1}{n}} \left[\frac{(L-x)^{\frac{2}{n}+2}}{\left(\frac{2}{n}+1\right)\left(\frac{2}{n}+2\right)} - \frac{L^{\frac{2}{n}+2}}{\left(\frac{2}{n}+1\right)\left(\frac{2}{n}+2\right)} + \frac{L^{\frac{2}{n}+1}}{\frac{2}{n}+1} x \right]$$

For $n = 1$, $K = E$, and $x = L$:

$$v = \frac{pL^4}{6EI} - \frac{pL^4}{24EI} = \frac{pL^4}{8EI}$$

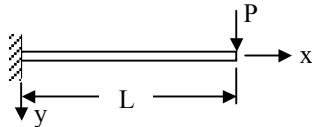

SOLUTION (12.4)


We write
 $M = P(L - x)$

Hence,

$$\begin{aligned} v''' &= \left(\frac{P}{EI_n}\right)^{\frac{1}{n}} (L - x)^{\frac{1}{n}} = \lambda (L - x)^{\frac{1}{n}} \\ v' &= -\frac{\lambda(L-x)^{\frac{1}{n}+1}}{\frac{1}{n}+1} + c_1 \\ v &= \frac{\lambda(L-x)^{\frac{1}{n}+2}}{\left(\frac{1}{n}+1\right)\left(\frac{1}{n}+2\right)} + c_1 x + c_2 \end{aligned}$$

(a)

Boundary conditions yield

$$v'(0) = 0; \quad c_1 = \frac{\lambda L^{\frac{1}{n}+1}}{\frac{1}{n}+1} \quad v(0) = 0; \quad c_2 = -\frac{\lambda L^{\frac{1}{n}+2}}{\left(\frac{1}{n}+1\right)\left(\frac{1}{n}+2\right)}$$

Substituting these onto Eq. (a), we find an expression for the deflection.

For a special case of $n = 1$ and $K = E$, the deflection at free end:

$$v(L) = \frac{PL^3}{2EI} - \frac{PL^3}{6EI} = \frac{PL^3}{3EI}$$



SOLUTION (12.5)

We have $\sigma = K\varepsilon^{\frac{1}{4}}$ and $I = \frac{2}{3}bh^3$. Here

$$\varepsilon = \frac{y}{h}\varepsilon_{\max} = ay, \quad a = \frac{\varepsilon_{\max}}{h}$$

Moment is thus,

$$M = \int oy dA = \int_{-h}^h yK(ay)^{\frac{1}{4}} b dy = \frac{8}{9}Ka^{\frac{9}{4}}$$

$$\text{But } \sigma_{\max} = K\varepsilon_{\max}^{\frac{1}{4}} = Ka^{\frac{1}{4}}h^{\frac{1}{4}}$$

$$\text{Hence, } M = (\frac{8}{9})bh^2\sigma_{\max}$$

or

$$\sigma_{\max} = \frac{9M}{8bh^2} = \frac{3Mh}{4I}$$



SOLUTION (12.6)

$$M = -Px \quad 0 \leq x \leq a$$

$$\text{Hence, } v_1'' = \left(-\frac{Px}{KI_n}\right)^{\frac{1}{n}} = -\lambda x^{\frac{1}{n}}, \quad v_1' = -\frac{\lambda x^{\frac{1+1}{n}}}{\frac{1+1}{n}} + C_1$$

$$v_1 = -\frac{\lambda x^{\frac{1+2}{n}}}{\frac{1+1}{n}(\frac{1+2}{n})} + C_1 x + C_2 \quad (\text{a})$$

Similarly, $M = -Pa$, at $a \leq x \leq (L-a)$:

$$v_2'' = \left(-\frac{Pa}{KI_n}\right)^{\frac{1}{n}} = -\lambda a^{\frac{1}{n}}, \quad v_2' = -\lambda a^{\frac{1}{n}}x + C_3$$

$$v_2 = -\lambda a^{\frac{1}{n}}\frac{x^2}{2} + C_3 x + C_4 \quad (\text{b})$$

Boundary conditions yield,

$$v_1(0) = 0; \quad C_2 = 0$$

$$v_2(\frac{L}{2}) = 0; \quad C_3 = \lambda a^{\frac{1}{n}} \frac{L}{2}$$

$$v_1'(a) = v_2'(a); \quad C_1 = \lambda a^{\frac{1}{n}} \frac{L}{2} - \frac{\lambda a^{\frac{1+1}{n}}}{n(\frac{1+1}{n})}$$

$$v_1(a) = v_2(a); \quad C_4 = \frac{\lambda a^{\frac{1+2}{n}}}{2} - \frac{\lambda a^{\frac{1+2}{n}}}{(\frac{1+1}{n})(\frac{1+2}{n})} - \frac{\lambda a^{\frac{1+2}{n}}}{n(\frac{1+1}{n})}$$

Substitution of these constants into Eqs. (a) and (b) gives the required solution.

For a special case of $n = 1$ and $K = E$, the midspan deflection is

$$v(\frac{L}{2}) = v_{\max} = \frac{PaL^2}{8EI} - \frac{Pa^3}{6EI}$$

$$\text{or } v_{\max} = \frac{Pa}{24EI}(3L^2 - 4a^2)$$



We compute

$$\bar{y} = 23.19 \text{ mm} \quad (\text{measured from top surface}) \text{ and } I = 4.4(10^{-7}) \text{ m}^4.$$

Therefore

$$\begin{aligned} v_{\max} &= \frac{0.45(8000)}{24(4.4 \times 10^{-7})200 \times 10^9} [3(1.2)^2 - 4(0.45)^2] \\ &= 0.00598 \text{ m} = 6 \text{ mm} \end{aligned}$$



SOLUTION (12.7)

$$A_{AB} = \frac{\pi}{4}(0.06)^2 = 2827.44 \times 10^{-6} \text{ m}^2$$

$$A_{BC} = \frac{\pi}{4}(0.05)^2 = 1965.5 \times 10^{-6} \text{ m}^2$$

(a) Since $A_{BC} < A_{AB}$:

$$\begin{aligned} P_{\max} &= \sigma_{yp} A_{BC} = 240 \times 10^6 (1965.5 \times 10^{-6}) \\ &= 471.2 \text{ kN} \end{aligned}$$



(b) Loading

Segment AB deforms elastically:

$$\delta_{AB} = \frac{PL}{AE} = \frac{471.2 \times 10^3 (1.5)}{2827.44 \times 10^{-6} (210 \times 10^9)} = 1.19 \text{ mm}$$

Segment BC deforms plastically:

$$(\delta_{BC})_{\max} = \delta_{AC} - \delta_{AB} = 10 - 1.19 = 8.81 \text{ mm}$$


After unloading

Segment BC remains elastic. Thus

$$(\delta_{AB})_p = 0$$

Segment BC remains plastic. We have:

$$\delta_{yp} = \varepsilon_{yp} L = \frac{\sigma_{yp}}{E} L = \frac{240 \times 10^6}{210 \times 10^9} (1) = 1.15 \text{ mm}$$

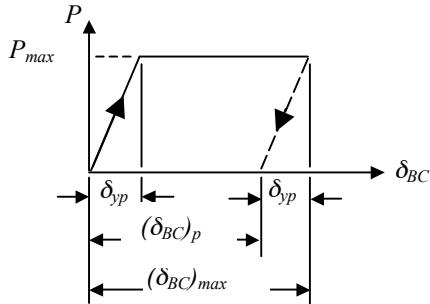

Referring to the above figure:

$$(\delta_{BC})_p = (\delta_{BC})_{\max} - \delta_{yp} = 8.81 - 1.15 = 7.66 \text{ mm}$$



SOLUTION (12.8)

$$A_{AB} = \frac{\pi}{4}(0.03)^2 = 706.85 \times 10^{-6} \text{ m}^2$$

$$A_{BC} = \frac{\pi}{4}(0.02)^2 = 314.16 \times 10^{-6} \text{ m}^2$$

(CONT.)

12.8 (CONT.)

(a) Since $A_{BC} < A_{AB}$:

$$P_{\max} = \sigma_{yp} A_{BC} = 280 \times 10^6 (314.16 \times 10^{-6}) \\ = 87.96 \text{ kN}$$



(b) Loading

Segment AB deforms elastically:

$$\delta_{AB} = \frac{PL}{AE} = \frac{87.96 \times 10^3 (1.5)}{706.85 \times 10^{-6} (210 \times 10^9)} = 0.89 \text{ mm}$$

Segment BC deforms plastically:

$$(\delta_{BC})_{\max} = \delta_{AC} - \delta_{AB} = 10 - 0.89 = 9.11 \text{ mm}$$

After loading

Segment AB remains elastic. Thus

$$(\delta_{AB})_p = 0$$



Segment BC remains plastic. We have:


$$\delta_{yp} = \frac{\sigma_{yp}}{E} L = \frac{280 \times 10^6}{210 \times 10^9} (1) = 1.33 \text{ mm}$$

Referring to the solution of prob. 12.1:

$$(\delta_{BC})_p = (\delta_{BC})_{\max} - \delta_y \\ = 9.11 - 1.33 = 7.78 \text{ mm}$$



SOLUTION (12.9)

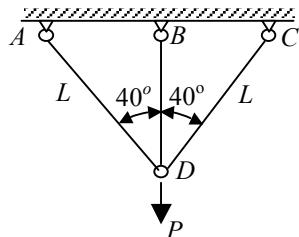

Using Eqs. (P12.9):

$$N_{AD} = N_{CD} = \frac{P \cos^2 40^\circ}{1 + 2 \cos^3 40^\circ} \\ = 0.309 P_u$$

$$N_{BD} = \frac{P}{1 + 2 \cos^3 40^\circ} = 0.527 P$$

Since $N_{BD} > N_{AD}$, we have

$$0.527 P_u = \sigma_{yp} A = 250 \times 10^6 (400 \times 10^{-6})$$

or

$$P_u = 189.8 \text{ kN}$$



SOLUTION (12.10)

See Eqs.(i) & (j) of Example 12.3:

$$P_s' = 4.32P_a' \quad 2P_a' + P_s' = 400 \quad (1, 2)$$

Solving,

$$P_a' = 63.3 \text{ kN} \quad P_s' = 189.9 \text{ kN}$$

Then

$$\sigma_s = \frac{189.9 \times 10^3}{750(10^{-6})} = 253 \text{ MPa} \quad \sigma_a = \frac{63.3 \times 10^3}{500(10^{-6})} = 126.6 \text{ MPa}$$

Since $253 \text{ MPa} > 240 \text{ MPa}$ and $126.6 \text{ MPa} < 320 \text{ MPa}$, steel bar yields while aluminum bars remain elastic. Thus

$$(\sigma_a)_{res} = 0 \quad (\sigma_s)_{res} = 253 - 240 = 13 \text{ ksi}$$



SOLUTION (12.11)

Rod begins to yield at:

$$(P_r)_{yp} = (\sigma_r)_{yp} A_r = (250)(45) = 11.25 \text{ kN}$$

$$(\delta_r)_{yp} = (\varepsilon_r)_{yp} L = \frac{(\sigma_r)_{yp}}{E_r} L = \frac{250 \times 10^6}{200 \times 10^9} (1.2) = 1.5 \text{ mm}$$

The result is shown in Fig. (a). Here Y_r corresponds to the onset of yield in the rod.

Tube begins to yield at:

$$(P_t)_{yp} = (\sigma_t)_{yp} A_t = (310)(60) = 18.6 \text{ kN}$$

$$(\delta_t)_{yp} = \frac{(\sigma_t)_{yp}}{E_t} L = \frac{310 \times 10^6}{100 \times 10^9} (1.2) = 3.72 \text{ mm}$$




The result is shown in Fig. (b), where Y_t represents the onset of yield in the tube.

Total P - δ of the rod-tube combination:

$$P = P_r + P_t \quad \delta = \delta_r = \delta_t$$

The result is in Fig. (c).

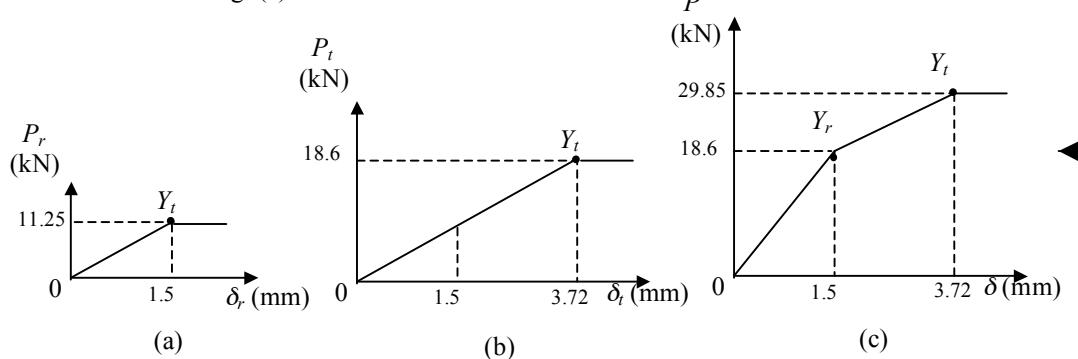

SOLUTION (12.12)

We have $e = 6 - 2 = 4 \text{ mm}$, $I = (1/12)(12)^4 = 1.728 \times 10^3 \text{ mm}^4$ and $c = 6 \text{ mm}$.

(a) Applying Eq. (12.9):


$$M_{yp} = \frac{\sigma_{yp} I}{c} = \frac{350 \times 1.728}{6}$$

or

$$M_{yp} = 100.8 \text{ N} \cdot \text{m}$$
◀

(b) Equation (12.10) results in

$$\begin{aligned} M_u &= a\sigma_{yp}(a^2 - \frac{e^2}{3}) = (0.012)(350)(12^2 - \frac{4^2}{3}) \\ &= 582.4 \text{ N} \cdot \text{m} \end{aligned}$$
◀

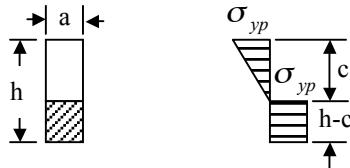SOLUTION (12.13)


Referring to this figure,


$$(\sigma_{yp}) \frac{ca}{2} = (h - c)a\sigma_{yp}$$

or

$$c = \frac{2h}{3}$$

Hence,

$$\begin{aligned} M &= \frac{1}{2} \frac{2ha}{3} \sigma_{yp} \frac{2}{3} \frac{2h}{3} + \frac{h}{3} a \sigma_{yp} \frac{h}{6} \\ &= (\frac{11}{54})ah^2\sigma_{yp} \end{aligned}$$
◀

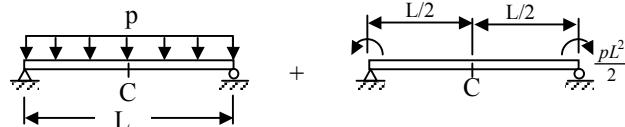SOLUTION (12.14)


Deflection at C (Case 7 of Tables D.4), in elastic range:

$$v_{max} = \frac{pL^4}{384EI}$$

Start of yielding:

$$p = p_{yp} = \frac{12M_{yp}}{L^2}$$

Thus,

$$v_{max} = \frac{M_{yp}L}{32EI} = \frac{(2bh^2\sigma_{yp}/3)L^2}{32E(2bh^3/3)} = \frac{\sigma_{yp}L^2}{32Eh}$$
◀

SOLUTION (12.15)

Equation (12.9):

$$\begin{aligned}\text{(a)} \quad M_{yp} &= \frac{2}{3}bh^2\sigma_{yp} \\ &= \frac{2 \times 0.06(0.04)^2}{3}(240 \times 10^6) = 15.36 \text{ kN}\cdot\text{m} \quad \blacktriangleleft\end{aligned}$$

(b) Equation (12.10b):

$$M = \frac{3}{2}(15.36 \times 10^3)[1 - \frac{1}{3}(\frac{20}{40})^2] = 21.12 \text{ kN}\cdot\text{m} \quad \blacktriangleleft$$

SOLUTION (12.16)

(a) Equations (12.9) and (12.10b):

$$\frac{M}{M_{yp}} = 1.3 = \frac{3}{2}[1 - \frac{1}{3}(\frac{e}{h})^2]$$

or

$$0.867 = 1 - \frac{1}{3}(\frac{e^2}{h^2}), \quad e = 0.632h \quad \blacktriangleleft$$

(b) The residual stress pattern will be as in Fig. 12.16c. ◀

SOLUTION (12.17)

$$A = 2(10)(40) + (10)(30) = 1100 \text{ mm}^2$$

Neutral axis divides section into two equal areas:

$$(30)(10) + 2(10)(h_1) = \frac{A}{2} = 550 \text{ mm}^2$$

Solving

$$h_1 = 12.5 \text{ mm} \quad h_2 = 27.5 \text{ mm}$$


Therefore,

$$Z = \frac{A(y_1 + y_2)}{2}$$

where

$$y_1 = \frac{\sum A_i \bar{y}_i}{\sum A_i} = \frac{1}{A/2} [2(h_1)(10)(\frac{h_1}{2}) + 10(30)(h_1 - 5)^2] = 6.93 \text{ mm}$$

$$y_2 = \frac{1}{A/2} [2(10)(h_2)(\frac{h_2}{2})] = 13.75 \text{ mm}$$

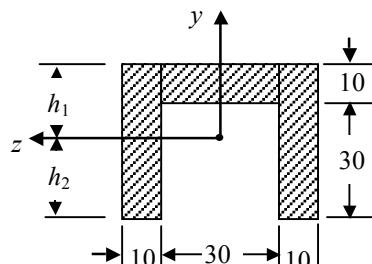

(CONT.)

12.17 (CONT.)


So

$$Z = \frac{1100}{2} (6.93 + 13.75) = 11,374 \text{ mm}^3$$

$$M_u = \sigma_{yp} Z = (260 \times 10^6)(11,374 \times 10^{-9}) \\ = 2.96 \text{ kN} \cdot \text{m}$$



SOLUTION (12.18)

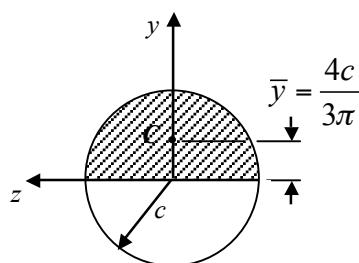


$$A = \frac{\pi c^2}{2} \quad S = \frac{\pi c^3}{4} \\ Z = 2A\bar{y} = 2 \frac{\pi c^2}{2} \frac{4c}{3\pi} \\ = \frac{4c^3}{3}$$



Thus,

$$f = \frac{Z}{S} = \frac{16}{3\pi} \approx 1.7$$

SOLUTION (12.19)

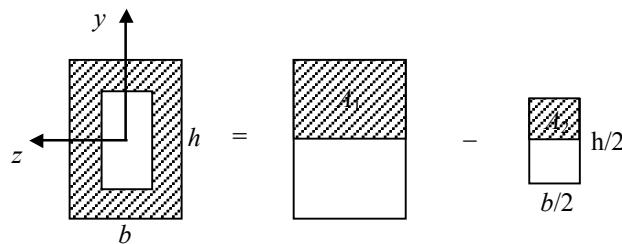

$$Z = 2A_1\bar{y}_1 - 2A_2\bar{y}_2 = 2[\frac{bh}{2} \frac{h}{4} - \frac{bh}{2(4)} \frac{h}{8}] = \frac{7bh^2}{32}$$


$$S = \frac{I}{h/2} = \frac{2}{h} \frac{1}{12} [bh^3 - \frac{b}{2} (\frac{h}{2})^3]$$

$$= \frac{bh^2}{6} (1 - \frac{1}{16}) = \frac{15}{96} bh^2$$

Thus,

$$f = \frac{Z}{S} = \frac{7bh^2}{32} \frac{96}{15bh^2} = 1.4$$

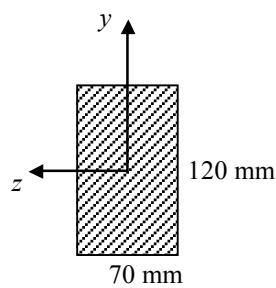

SOLUTION (12.20)


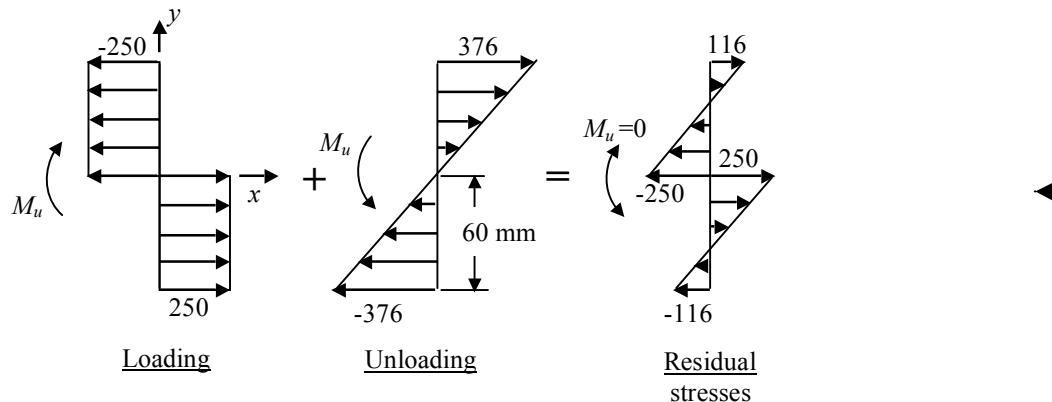
$$\begin{aligned}
 I &= \frac{1}{12}(70)(120)^3 \\
 &= 10 \times 10^6 \text{ mm}^4 \\
 M_{yp} &= \frac{I}{c} \sigma_{yp} \\
 &= \frac{10 \times 10^{-6}}{0.06} (250 \times 10^6) \\
 &= 41.7 \text{ kN}\cdot\text{m}
 \end{aligned}$$

$$M_u = fM_{yp} = \frac{3}{2}(41.7) = 62.6 \text{ kN}\cdot\text{m}$$

Elastic rebound stress

$$\begin{aligned}
 \sigma'_{max} &= \frac{Mc}{I} = \frac{62.6 \times 10^3 (0.06)}{10 \times 10^{-6}} \\
 &= 376 \text{ kPa}
 \end{aligned}$$

The results are sketched (in MPa) below.



SOLUTION (12.21)

Initial Yielding:

$$\sigma_{yp} = \frac{N_1}{\pi r^2} + \frac{4M_1}{\pi r^3} \quad (a)$$

where

$$N_{yp} = \pi r^2 \sigma_{yp}, \quad M_{yp} = \sigma_{yp} \pi r^3 / 4$$


(CONT.)

12.21 (CONT.)

We express Eq. (a) in the form

$$\frac{N_1}{N_{yp}} + \frac{M_1}{M_{yp}} = 1 \quad (1)$$

Fully Plastic Deformation:

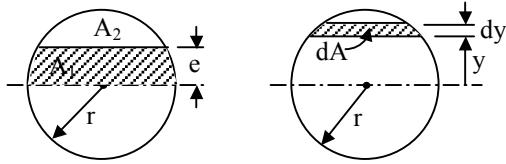

From a Mathematics Handbook table:

$$A_2 = \frac{\pi r^2}{2} - [e(r^2 - e^2)^{\frac{1}{2}} + r^2 \sin^{-1}(\frac{e}{r})]$$

$$A_1 = e(r^2 - e^2)^{\frac{1}{2}} + r^2 \sin^{-1}(\frac{e}{r})$$

Thus,

$$N_2 = 2\sigma_{yp}[e(r^2 - e^2)^{\frac{1}{2}} + r^2 \sin^{-1}(\frac{e}{r})] \quad (2)$$

We also write

$$dA = 2(r^2 - y^2)^{\frac{1}{2}} dy$$

$$Q = \int_e^r 2y(r^2 - y^2)^{\frac{1}{2}} dy = \frac{2}{3}(r^2 - e^2)^{\frac{3}{2}}$$

Here Q is the first moment of the area A_2 . Hence,

$$M_2 = 2Q\sigma_{yp} = \frac{4}{3}(r^2 - e^2)^{\frac{3}{2}}\sigma_{yp} \quad (3)$$

$$M_u = \frac{4}{3}r^3\sigma_{yp} = \frac{16}{3\pi}M_{yp}$$

Solving Eq.(3),

$$e = [r^2 - (\frac{3}{4}\frac{M_2}{\sigma_{yp}})^{\frac{2}{3}}]^{\frac{1}{2}}$$

Substituting this into Eq. (2):

$$N_2 = 2\sigma_{yp}[r^2 - (\frac{3}{4}\frac{M_2}{\sigma_{yp}})^{\frac{2}{3}}]^{\frac{1}{2}}(\frac{3}{4}\frac{M_2}{\sigma_{yp}})^3 + 2r^2\sigma_{yp} \sin^{-1}[1 - (\frac{3}{4r^2}\frac{M_2}{\sigma_{yp}})^{\frac{2}{3}}]^{\frac{1}{2}}$$

The foregoing results in

$$\frac{\pi N_2}{2N_{yp}} = (\frac{3\pi}{16})^{\frac{1}{3}}(\frac{M_2}{M_{yp}})^{\frac{1}{3}}[1 - (\frac{3\pi}{16})^{\frac{2}{3}}(\frac{M_2}{M_{yp}})^{\frac{2}{3}}]^{\frac{1}{2}} + \sin^{-1}[1 - (\frac{3\pi}{16})^{\frac{2}{3}}(\frac{M_2}{M_{yp}})^{\frac{2}{3}}]^{\frac{1}{2}} \quad (4)$$

The governing equations for yielding to impend and for fully plastic deformation are given by Eqs. (1) and (4). A sketch of these, interaction curves, are shown below.

(CONT.)

12.21 (CONT.)

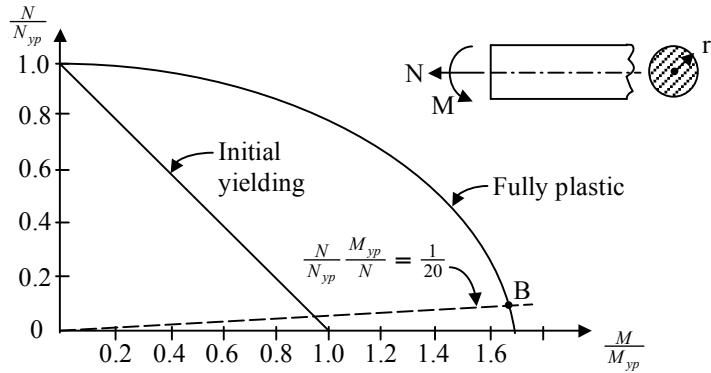


Figure P12.21

SOLUTION (12.22)

Let $P=N$. Then referring to Fig. P12.22, we have

$$M = Nd = N(0.05 + 0.05 + 0.025) = 0.125N$$

Thus, $N/M = 1/0.125$

$$\text{Also, } \frac{M_{yp}}{N_{yp}} = \frac{(\pi r^3/4)\sigma_{yp}}{\pi r^3\sigma_{yp}} = \frac{0.025}{4}$$

and

$$M/M_{yp} = 20(N/N_{yp})$$

Now referring to Fig. P12.21, we find that $B(1.68, 0.084)$.

Therefore,

$$\begin{aligned} N_2 &= 0.084N_{yp} = 0.084(\pi r^3\sigma_{yp}) \\ &= 0.084\pi(0.025)^2(280 \times 10^6) \\ &= 46.18 \text{ kN} \end{aligned}$$



SOLUTION (12.23)

The plastic hinges for at 1 and 2, Fig. (a).

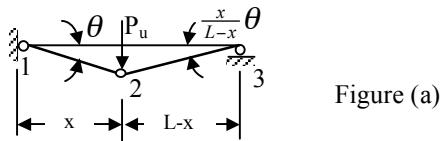


Figure (a)

Apply the principle of virtual work:

$$P_u(x\delta\theta) = M_u[2(\delta\theta + \frac{x\delta\theta}{L-x})]$$


from which

$$P_u = \frac{2L}{x(L-x)} M_u$$

The condition $dP_u/dx = 0$ gives $x = L/2$. Minimum magnitude of the ultimate load is thus

$$P_u = \frac{8M_u}{L}$$

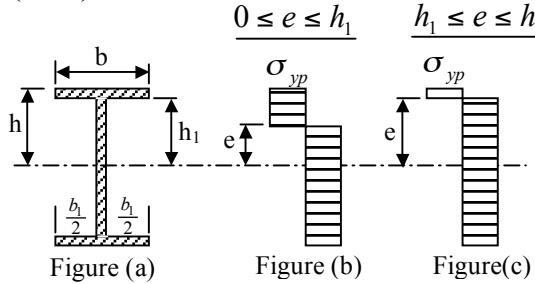

SOLUTION (12.24)

Initial Yielding:

$$\sigma_{yp} = \frac{N_1}{A} + \frac{M_1 c}{I} = \frac{N_1}{2(bh - b_1 h_1)} + \frac{M_1 h}{(2/3)(bh^3 - b_1 h_1^3)} \quad (a)$$

Here,

$$N_{yp} = 2(bh - b_1 h_1) \sigma_{yp}$$

$$M_{yp} = \frac{2}{3h} (bh^3 - b_1 h_1^3) \sigma_{yp}$$

Equation (a) may now be written

$$\frac{N_1}{N_{yp}} + \frac{M_1}{M_{yp}} = 1 \quad (1)$$

Fully Plastic Deformation:

For $0 \leq e \leq h_1$ (Fig. b):

$$N_2 = 2A_2 \sigma_{yp} = 2(b - b_1)e \sigma_{yp}$$

from which

$$e = \frac{N_2}{2(b - b_1)\sigma_{yp}}$$


We have (Fig. d):

$$\begin{aligned} A_2 &= b(h - h_1) + (h_1 - e)(b - b_1) \\ &= bh - eb + eb_1 - b_1 h_1 \\ \bar{y} &= \sum \frac{A_y}{A_2} = \frac{b(h-h_1)(\frac{h-h_1}{2}+1)}{A_2} = \frac{1}{2} \frac{bh^2 - b_1 h_1^2 - e^2 b + e^2 b_1}{bh - eb + eb_1 - b_1 h_1} \end{aligned}$$

Thus,

$$M_2 = 2\sigma_{yp} A_2 \bar{y} = (bh^2 - b_1 h_1^2 - e^2 b^2 + e^2 b_1) \sigma_{yp} \quad (b)$$

For $e = 0$: $M_2 = M_u = (bh^2 - b_1 h_1^2) \sigma_{yp}$.



Substituting the given data, the preceding expressions become

$$N_{yp} = 1.68h^2 \sigma_{yp}, \quad M_{yp} = 0.922h^3 \sigma_{yp}$$

$$M_u = 1.113h^3 \sigma_{yp}$$

and $\frac{M_u}{M_{yp}} = 1.21$, $M_{yp} = 0.55hN_{yp}$

Hence, Eq. (b) leads to

$$\frac{M_2}{1.21M_{yp}} = 1 - \frac{1}{3.16} \left(\frac{N_2}{N_{yp}} \right)^2 \quad (2a)$$

This is valid for

$$0 \leq 0 \leq h_1 \quad \text{or} \quad 0 \leq \frac{N_2}{N_{yp}} \leq 1.67$$

(CONT.)

12.24 (CONT.)

For $h_1 \leq e \leq h_2$ (Figs. c and e):

$$N_2 = 2[0.7h + 0.2h + (e - 0.7)2h]\sigma_{yp} = (-2.52h^2 + 4eh)\sigma_{yp}$$

or $e = \frac{N_2}{4h\sigma_{yp}} + 0.63h$

$$\begin{aligned} M_2 &= 2h(h - e)2(e + \frac{h-e}{2})\sigma_{yp} \\ &= 2h^3\sigma_{yp} - 2he^2\sigma_{yp} \end{aligned}$$




Figure (e)

Hence,

$$\frac{M_2}{2h^3\sigma_{yp}} = 1 - \frac{e^2}{h^2} = 1 - \frac{N_2^2}{16h^4\sigma_{yp}^2} - \frac{0.315N_2}{h^2\sigma_{yp}} - 0.397$$

$$\text{or } \frac{1}{2.17} \frac{M_2}{M_{yp}} = 0.603 - 0.176\left(\frac{N_2}{N_{yp}}\right)^2 - 0.529\left(\frac{N_2}{N_{yp}}\right) \quad (2b)$$

which is valid for

$$h_1 \leq e \leq h \quad \text{or} \quad 1.67 \leq \frac{N_2}{N_{yp}} \leq 1$$

Equations (1) and (2) are the governing expressions of the plastic bending. A sketch of these, interaction curves, are shown in the figure given below.


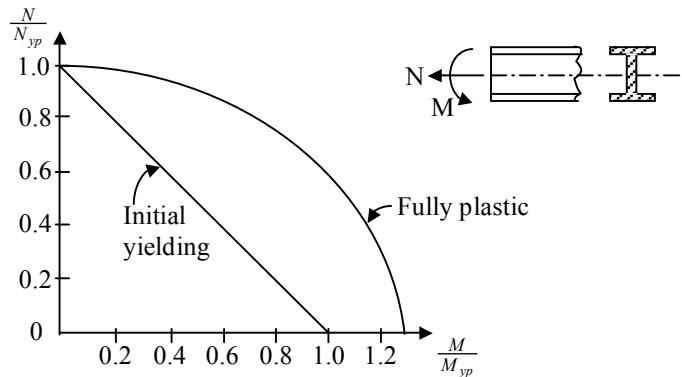


Figure P12.24

SOLUTION (12.25)

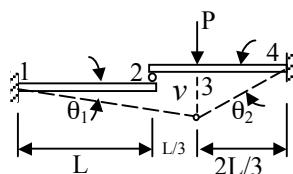

We have

$$v = \frac{4}{3}L\theta_1 = \frac{2}{3}L\theta_2$$

and $\delta v = \frac{4}{3}L\delta\theta_1 = \frac{2}{3}L\delta\theta_2$

from which $2\delta\theta_1 = \delta\theta_2$.

Applying the principle of virtual work:

$$P_u\delta v = M_u\delta\theta_1 + M_u(\delta\theta_1 + \delta\theta_2) + M_u\delta\theta_2$$

or $\frac{4}{3}P_uL\delta\theta_1 = 6M_u\delta\theta_1$

Solving, $P_u = \frac{9M_u}{2L}$



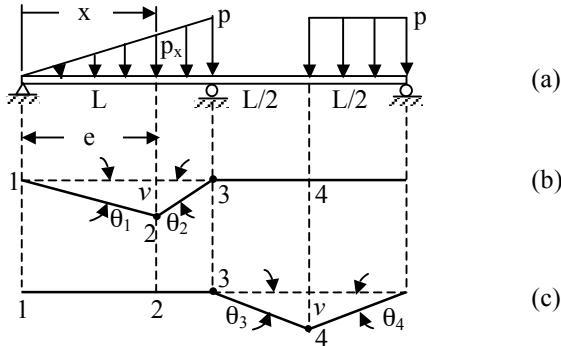
SOLUTION (12.26)


Figure P12.26

We have two different modes to be checked for collapse loading.

Mode A, Fig. P12.26b:

$$\theta_1 = \frac{\theta_2(L-e)}{e}; \quad \theta_1 + \theta_2 = \frac{L\theta_2}{e}$$

Applying the principle of virtual work:

$$\delta \int_0^e (\theta_1 x) \frac{x}{L} pdx + \delta \int_e^L [\theta_1 e - \theta_2(x-e)] \frac{x}{L} pdx = M_u \delta \theta_1 + M_u \delta \theta_2 + M_u \delta \theta_2$$

$$\text{or } \delta \int_0^e \theta_1 x \frac{x}{L} pdx + \delta \int_e^L [\theta_1 e - \theta_2(x-e)] \frac{x}{L} pdx = M_u \delta \theta_2 \left(\frac{L}{e} + 1 \right) \quad (a)$$

Integrating the left hand side of this equation, carrying out the algebra and simplifying:

$$\delta \theta_2 p \left[\frac{L^2 - e^2}{6} \right] = M_u \delta \theta_2 \left(\frac{L}{e} + 1 \right)$$

Solving,

$$p = \frac{6M_u}{e(L-e)} \quad (b)$$

Then, $dp/de = 0$ gives,

$$0 = -\frac{6M_u}{e^2(L-e)} + \frac{6M_u}{e(L-e)}; \quad e = \frac{L}{2}$$

Introducing this value of e into Eq. (b), the collapse load is

$$P_u = \frac{24M_u}{L^2}$$



Mode B, Fig. P12.26c:

From symmetry $\theta_3 = \theta_4 = \theta$. Principle of virtual work gives:

$$\delta \int_{L/2}^L [\theta \frac{L}{2} - \theta(x - \frac{L}{2})] pdx = 3M_u \delta \theta$$

or

$$\delta \int_{L/2}^L [\theta L - \theta x] pdx = 3M_u \delta \theta$$

Integrating,

$$\delta \theta \frac{L^2 p}{8} = 3M_u \delta \theta$$

or

$$P_u = \frac{24M_u}{L}$$



Note that the collapse load is the same for modes A and B.

SOLUTION (12.27)

Assume that plastic hinges force at 1 and 2, as shown in Fig. (a).
On the average, plastic limit load

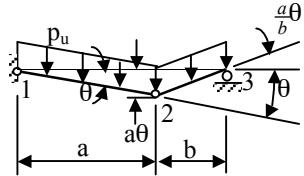


Figure (a)

Note that p_u goes through a virtual displacement of $a\delta\theta/2$. Thus, applying the principle of virtual work:

$$(p_u L) \frac{1}{2} a \delta\theta = M_u \delta\theta + M_u (1 + \frac{a}{b}) \delta\theta$$

Solving,


$$p_u = \frac{2M_u}{L} \left(\frac{2L-a}{La-a^2} \right)$$

The unknown distance a is determined from $dp_u/da = 0$. In so doing and simplifying the result, we obtain

$$a = (2 - \sqrt{2})L$$

and

$$b = L - a = (\sqrt{2} - 1)L.$$

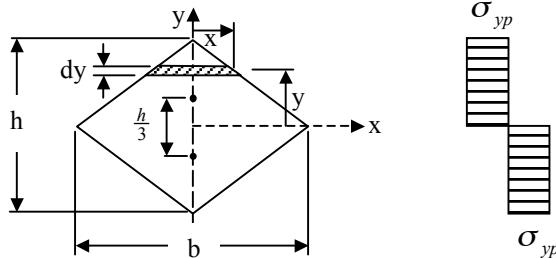SOLUTION (12.28)


(a) We have $M_{yp} = \sigma_{yp} I/h$

From geometry,

$$\frac{x}{b/2} = \frac{(h/2)-y}{h/2}; \quad x = \frac{b(h-2y)}{2h}$$

$$\text{Then, } I = 2 \int_0^{h/2} (2x) dy (y^2) = \frac{bh^3}{48}$$

Hence, total yielding moment

$$M_u = 2 \frac{bh^2}{48} \frac{1}{h} \sigma_{yp} = \frac{bh^2}{24} \sigma_{yp}$$

Also,


$$\begin{aligned} M_u &= \frac{1}{2} (\text{area of rhombus}) \times (\text{distance between centroids}) (\sigma_{yp}) \\ &= \frac{bh}{4} \left(\frac{h}{3} \right) \sigma_{yp} = \frac{bh^2}{12} \sigma_{yp} \end{aligned}$$

$$\text{Thus, } \frac{M_u}{M_{yp}} = 2$$

(CONT.)

12.28 (CONT.)

(b)

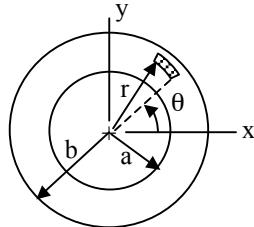

$$I = \frac{\pi(b^4 - a^4)}{4}$$

$$M_{yp} = \frac{\pi}{4}(b^4 - a^4) \frac{\sigma_{yp}}{b} = \frac{\pi}{4b}(b^4 - a^4)\sigma_{yp}$$

Also, referring to the figure:

$$M_x = 2 \int_0^\pi \int_0^b r^2 \sin \theta dr d\theta = \frac{4}{3}(b^3 - a^3)$$

Hence,

$$y_c = \frac{M_x}{A} = \frac{4}{3} \frac{b^3 - a^3}{(\pi/2)(b^2 - a^2)} = \frac{4}{3\pi} \frac{b^3 - a^3}{b^2 - a^2}$$

We therefore have,

$$\frac{M_u}{M_{yp}} = \frac{(\pi/2)(b^2 - a^2)\sigma_{yp}y_c}{(\pi/4b)(b^4 - a^4)\sigma_{yp}} = \frac{16b}{3\pi} \frac{b^3 - a^3}{b^4 - a^4}$$




SOLUTION (12.29)

$$(a) \quad \phi = \frac{\gamma_{max} L}{c} = \frac{6000 \times 10^{-6} (0.5)}{0.03} = 0.10 \text{ rad}$$

$$\gamma_y = \frac{\tau_{yp}}{G} = \frac{180 \times 10^6}{70 \times 10^9} = 2600 \mu < 6000 \mu$$

and shaft is yielded.

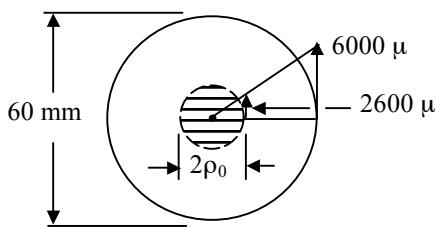

From similar triangles:

$$\frac{\rho_0}{2600} = \frac{30}{6000}$$

or

$$\rho_0 = 13 \text{ mm}$$



(b) Elastic core. Use Eq.(b) of Sec. 12.9:

$$T_1 = \frac{\pi \rho_0^3}{2} \tau_{yp} = \frac{\pi}{2} (0.013)^3 (180 \times 10^6) = 621 \text{ N}\cdot\text{m}$$

Outer part. Use Eq.(c) of Sec. 12.9:

$$T_2 = \frac{2\pi}{3} (c^3 - \rho_0^3) \tau_{yp} = \frac{2\pi}{3} (0.03^3 - 0.013^3) (180 \times 10^6)$$

$$= 7.01 \text{ kN}\cdot\text{m}$$

Thus,

$$T = T_1 + T_2 = 7.63 \text{ kN}\cdot\text{m}$$



SOLUTION (12.30)

$$G = 26 \times 10^6 \text{ GPa}, \quad \tau_{yp} = 140 \text{ MPa} \quad (\text{Table D.1})$$

(a) For partially plastic shaft, using Eq.(12.19):

$$\left(\frac{\rho_0}{c}\right)^3 = 4 - \frac{3T}{T_{yp}} = 4 - \frac{6T}{\pi c^3 \tau_{yp}}$$

Substituting the given values

$$\left(\frac{\rho_0}{0.025}\right)^3 = 4 - \frac{6(4.5 \times 10^3)}{\pi(0.025)^3(140 \times 10^6)} = 0.0711$$


$$\rho_0 = 12.4 \text{ mm}$$



(b) $\gamma_y = \frac{\rho_0 \phi}{L} = \frac{\tau_{yp}}{G}, \quad \phi = \frac{\tau_{yp}}{G} \frac{L}{\rho_0}$

$$\phi = \frac{140 \times 10^6 (1.2)}{26 \times 10^9 (0.0124)} = 0.5211 \text{ rad} = 29.9^\circ$$

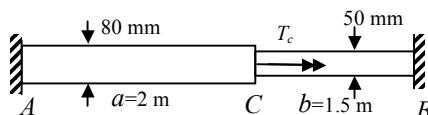

SOLUTION (12.31)


$$\gamma_{yp} = \frac{\tau_{yp}}{G} = \frac{240 \times 10^6}{80 \times 10^9} = 3000 \mu$$

$$(\gamma_{max})_{AC} = \frac{c\phi}{a} = \frac{0.04(0.25)}{2} = 5000 \mu$$

$$(\gamma_{max})_{CB} = \frac{0.025(0.25)}{1.5} = 4167 \mu$$

Both segments are yielded and partially plastic.

Segment AC


$$\rho_0 = \frac{c\gamma_y}{\gamma_{max}}$$

$$= \frac{0.04(3000 \times 10^{-6})}{5000 \times 10^{-6}} = 24 \text{ mm}$$

$$T_{yp} = \frac{\pi c^3}{2} \tau_{yp} = \frac{\pi (0.04)^3}{2} (240 \times 10^6) = 24.127 \text{ kN}\cdot\text{m}$$

Use Eq. (12.19):

$$T_{AC} = \frac{4}{3} (24.127) \left[1 - \frac{1}{4} \left(\frac{24}{40} \right)^3 \right] = 30.43 \text{ kN}\cdot\text{m}$$

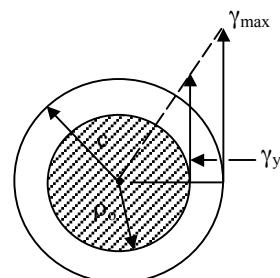

(CONT.)

12.31 (CONT.)

Segment BC

$$\rho_0 = \frac{c\gamma_{yp}}{\gamma_{max}} = \frac{0.025(3000 \times 10^{-6})}{4167 \times 10^{-6}} = 1.8 \text{ mm}$$

$$T_{yp} = \frac{\pi c^3}{2} \tau_{yp} = \frac{\pi (0.025)^3}{2} (240 \times 10^6) = 5.89 \text{ kN}\cdot\text{m}$$

Use Eq. (12.19):

$$T_{BC} = \frac{4}{3} (5.89) \left[1 - \frac{1}{4} \left(\frac{18}{25} \right)^3 \right] = 7.12 \text{ kN}\cdot\text{m}$$

Total applied torque is therefore

$$T = T_{AC} + T_{BC} = 37.55 \text{ kN}\cdot\text{m}$$



SOLUTION (12.32)

For $r=0$, Eq. (f) of Sec. 12.11 leads to $c_1 = 0$. Then, in plastic zone

$$\sigma_r = \sigma_{yp} - \frac{\rho\omega^2 r^2}{3}, \quad \sigma_\theta = \sigma_{yp}$$

If the plastic zone extends to radius c :

$$\sigma_c = \sigma_{yp} - \frac{\rho\omega^2 c^2}{3}$$

which may be found directly from Eq. (12.30) by setting $a=0$. The outer elastic zone is represented by an annular disk yielding at the inner radius c , wherein radial stress is σ_c .

We follow a procedure similar to that described in Sec. 12.11 for an annular disk.

Boundary conditions:

$$(\sigma_r)_{r=c} = \sigma_c, \quad (u)_{r=0} = 0$$

are substituted into Eqs. (8.37) to obtain c_1 and c_2 . We then determine the stresses in the elastic region as follows:


$$\begin{aligned} \sigma_r &= \frac{\sigma_{yp}}{24N^2} [3(1+\nu) - (1+3\nu) \frac{c^4}{r^2 b^2}] (1 - \frac{r^2}{b^2}) \\ \sigma_\theta &= \frac{\sigma_{yp}}{24N^2} [\frac{c^4}{b^4} (1 + \frac{b^4}{r^4}) (1 + 3\nu) + 3\nu (3 + \nu) - 3(1 + 3\nu) \frac{r^2}{b^2}] \end{aligned}$$



where

$$N^2 = \frac{8+(1+3\nu)[(c/b)^2-1]}{24}$$

SOLUTION (12.33)



The sand volume is

$$V = \frac{1}{2} (b - a) ah + 2(\frac{1}{3} a^2 \frac{h}{2})$$

(CONT.)

12.33 (CONT.)


$$\text{Slope } \tau_{yp} = \frac{h}{(a/2)}$$

The ultimate torque is thus

$$T_u = \frac{(3b-a)a^2}{6}\tau_{yp}$$

The yield torque given in Table 6.2, by letting $\tau = \tau_{yp}$.

SOLUTION (12.34)

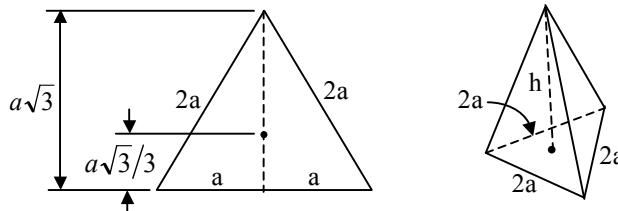

$$\text{Volume} = \frac{1}{3} h (\frac{1}{2} \cdot 2a \cdot a\sqrt{3}) = \frac{\sqrt{3}}{3} ha^2$$

$$\text{Slope} = \frac{h}{a\sqrt{3}/3} = \frac{3h}{a\sqrt{3}} = \tau_{yp}, \quad h = \frac{a\sqrt{3}}{3} \tau_{yp}$$

(a) $T_u = 2V = \frac{2}{3} a^3 \tau_{yp}$

(b) From Table 6.2: $\tau_A = 20 \frac{T}{a_1^3} = \frac{20T}{8a^3}$

$$\text{Thus, } T_{yp} = \frac{8a^3}{20} \tau_{yp}$$

(c) Referring to the preceding results in items (a) and (b):

$$\frac{T_u}{T_{yp}} = \frac{5}{3}$$

SOLUTION (12.35)

Equilibrium condition, from Eq. (8.2):

$$\frac{d}{dr}(t\sigma_r) - \frac{t(\sigma_\theta - \sigma_r)}{r} = 0$$

Profile is, using Eq. (8.36) with $s = 1$, $rt = at_a$. For full plasticity

$$\sigma_\theta - \sigma_r = \sigma_{yp}$$

$$\text{Thus, } t\sigma_r = \int \frac{at_a}{r} \frac{\sigma_{yp}}{r} dr = -\frac{\sigma_{yp}at_a}{r} + C_1$$

$$\text{Since, } (\sigma_r)_{r=b} = 0; \quad C_1 = \frac{\sigma_{yp}at_a}{b}$$

Then, noting that $\sigma_r = -p_i$ at $t = t_a$:

$$\frac{p_i}{\sigma_{yp}} = a\left(\frac{1}{r} - \frac{1}{b}\right)$$

or

$$p_i = \frac{a(b-r)}{rb} \sigma_{yp}$$

SOLUTION (12.36)

We have $\alpha = 1/2$ and substituting the given data into Eq. (12.42):

$$t_0 = \frac{0.606 pr_0}{(2K/\sqrt{3})(n/\sqrt{3})} = \frac{0.606(14 \times 10^6)(0.5)}{(2 \times 900 \times 10^6 / 1.73)(0.2 / 1.73)^{0.2}} \\ = 0.0063 \text{ m} = 6.3 \text{ mm}$$

◀

SOLUTION (12.37)

In this case, we have $\sigma_z > \sigma_\theta$.

The total force is

$$P = 2\pi r t \sigma_1 \quad (\text{a})$$

where $\sigma_1 = \sigma_z \quad \sigma_2 = \sigma_\theta$

The values of r and t are given by Eqs. (g) and (f) of Sec. 12.12.

Substituting these into Eq. (a):

$$P = 2\pi r_0 e^{-\varepsilon_1} \sigma_1$$

At instant of stability,

$$dP = \left(\frac{\partial P}{\partial \sigma_1}\right) d\sigma_1 + \left(\frac{\partial P}{\partial \varepsilon_1}\right) d\varepsilon_1 = 0$$

or $\frac{d\sigma_1}{d\varepsilon_1} = \sigma_1$

Equations (12.28) has the form

$$\sigma_1 = f(\alpha) \varepsilon_1^n$$

from which stability condition is

$$\varepsilon_1 = n$$

Then,

$$n = \left(\frac{\sigma_1}{K}\right)^{\frac{1}{n}} (\alpha^2 - \alpha + 1) \left(\frac{2-\alpha}{2}\right)^n$$

Solving,

$$\sigma_1 = K(2n)^n \left(\frac{1}{\alpha^2 - \alpha + 1}\right)^{\frac{1-n}{2}} \left(\frac{1}{2-\alpha}\right)^n \quad (\text{b})$$

Since $\varepsilon_1 + \varepsilon_2 + \varepsilon_3 = 0$, the maximum principal strain is

$$\varepsilon_1 = \ln \frac{L}{L_0} = \ln \frac{t}{t_0} + \ln \frac{r}{r_0}$$

Minimum strain is

$$\varepsilon_3 = \ln \frac{t}{t_0}; \quad t = t_0 \ln^{-1} \varepsilon_3$$

Thus,

$$\sigma_1 = \frac{P}{2\pi r t} = \frac{P}{2\pi r_0 \ln^{-1} \varepsilon_2 t_0 \ln^{-1} \varepsilon_3}$$

Substituting Eqs. (12.38b) and (12.38c) into this equation:

$$\sigma_1 = \frac{P}{2\pi r_0 t_0 \ln^{-1} \left[\left(\frac{\sigma_1}{K}\right)^{1/2} (\alpha^2 - \alpha + 1) \frac{1-n}{2} \left(\frac{\alpha}{2} - 1\right) \right]}$$

or $t_0 = \frac{P}{2\pi r_0 \sigma_1 \ln^{-1} \left[\left(\frac{\sigma_1}{K}\right)^{1/2} (\alpha^2 - \alpha + 1) \frac{1-n}{2} \left(\frac{\alpha}{2} - 1\right) \right]}$

◀

where, σ_1 is given by Eq. (b).

Results of the preceding expressions are simplified by setting $\alpha = 1/2$.

SOLUTION (12.38)

Since the mean radius does not change, we have $d\varepsilon_0 = 0$. We also take $\sigma_3 = \sigma_r = 0$.

Material is incompressible $d\varepsilon_L = d\varepsilon_3$, or $\varepsilon_L = -\varepsilon_3$.

The Levy-Mises equation is thus

$$\frac{d\varepsilon_L}{\sigma_L - \sigma_\theta} = \frac{d\varepsilon_L}{\sigma_\theta} \quad \text{or} \quad \sigma_L = 2\sigma_\theta$$

Hence, $\sigma_e = \frac{\sqrt{3}}{2}\sigma_L$

And $\varepsilon_e = (\frac{2}{3})d\varepsilon_L = -(\frac{2}{\sqrt{3}})d\varepsilon_3$

Radius $r_0 = \text{constant}$. Therefore,

$$P = 2\pi r_0 \cdot t\sigma_L$$

At instant of instability, $dP = 0$:

$$\frac{d\sigma_L}{\sigma_L} = -\frac{dt}{t} = -d\varepsilon_3 = d\varepsilon_L$$

Hence,

$$\varepsilon_e = \frac{2}{\sqrt{3}}n = \frac{2}{\sqrt{3}}\varepsilon_L$$

$$\sigma_e = K(\frac{2}{\sqrt{3}})^n = \frac{\sqrt{3}}{2}\sigma_L, \quad t = t_0 e^{-n}$$

At instant of instability, the load is then given by Eq. (P12.38).

SOLUTION (12.39)

(a) Use Eq. (8.10), with $\tau_{\max} = \sigma_{yp}/2n$:

$$\frac{\sigma_{yp}}{2n} = \frac{p_i b^2}{b^2 - a^2} = \frac{p_i}{1 - (\frac{a}{b})^2};$$

Substituting the given data:

$$50 = \frac{60}{1 - (\frac{50}{b})^2} \quad \text{or} \quad \frac{5}{6} = 1 - \left(\frac{50}{b}\right)^2$$

Solving, $b = 122.5 \text{ mm}$



(b) Apply Eq. (12.47) with $k = 1$ and $n = 3$:

$$p_u = \frac{\sigma_{yp}}{n} \ln\left(\frac{a}{b}\right); \quad -60 = \frac{250}{2.5} \ln\left(\frac{50}{b}\right)$$

or $\frac{50}{b} = e^{-\left(\frac{150}{250}\right)} = 0.549$

Solving,

$$b = 91.11 \text{ mm}$$



SOLUTION (12.40)

Apply Eq. (12.61a): with $c = 1.4a$ and $k = \frac{2}{\sqrt{3}}$. We have $p_i = \sigma_r$ at $r = a$. Thus

$$\begin{aligned} p_i &= \frac{2}{\sqrt{3}}(260)\left[\ln\left(\frac{a}{1.4a}\right) - \frac{(2a)^2 - (1.4a)^2}{2(2a)^2}\right] \\ &= 300.2[-0.336 - 0.255] \\ &= -177.4 \text{ MPa} \end{aligned}$$



SOLUTION (12.41)

(a) Using Eq. (8.11):

$$p_{yp} = \frac{420}{3} \frac{36-25}{2(36)} = 21.39 \text{ MPa}$$

We have $k = 1$, and thus,

$$p_u = \frac{\sigma_{yp}}{n} \ln \frac{b}{a} = \frac{420}{3} \ln \frac{6}{5} = 25.53 \text{ MPa}$$

(b) $\left(\frac{\sigma_{yp}}{n}\right)^2 = \sigma_\theta^2 - \sigma_\theta \sigma_r + \sigma_r^2$

or $(140)^2 = p_{yp}^2 \left[\left(\frac{36+25}{36-25} \right)^2 + \frac{36+25}{36-25} + 1 \right]$

Solving, $p_{yp} = 22.92 \text{ MPa}$

Now $k = 2/\sqrt{3}$, and hence,

$$p_u = \frac{2}{\sqrt{3}} (25.53) = 29.48 \text{ MPa}$$

SOLUTION (12.42)

Using Eqs. (12.57) and (12.58) with $k = 1$ and $r = 0.25 \text{ m}$,

$$p_u = 400 \ln \left(\frac{0.3}{0.2} \right) = 162.2 \text{ MPa}$$

$$\sigma_r = -400 \ln \left(\frac{0.3}{0.25} \right) = -72.93 \text{ MPa}$$

$$\sigma_\theta = 400 \left[1 - \ln \frac{0.3}{0.25} \right] = 327.1 \text{ MPa}$$

and $\sigma_z = \frac{1}{2} (\sigma_r + \sigma_\theta) = 127.1 \text{ MPa}$

Unloading from p_u . At $r = 0.25 \text{ m}$, Eqs. (8.12) and (8.20):

$$\sigma_r = \frac{0.2^2 (162.2)}{0.3^2 - 0.2^2} \left(1 - \frac{0.3^2}{0.25^2} \right) = -57.09 \text{ MPa}$$

$$\sigma_\theta = \frac{0.2^2 (162.2)}{0.3^2 - 0.2^2} \left(1 + \frac{0.3^2}{0.25^2} \right) = 316.6 \text{ MPa}$$

$$\sigma_z = 162.2 \frac{0.2^2}{0.3^2 - 0.2^2} = 129.8 \text{ MPa}$$

Residual stresses at $r=0.25 \text{ m}$:

$$(\sigma_\theta)_{res.} = 327.1 - 316.6 = 10.5 \text{ MPa}$$

$$(\sigma_r)_{res.} = -72.93 - 57.09 = -15.84 \text{ MPa}$$

$$(\sigma_z)_{res.} = 127.1 - 129.8 = -2.7 \text{ MPa}$$

SOLUTION (12.43)

We have $k = 1$. Refer to Eq. (12.57).

Inner cylinder, at $r = b$:

$$-p_b = -p_u + (\sigma_{yp})_i \ln \frac{b}{a} \quad (a)$$

Outer cylinder, at $r = c$:

$$0 = -p_b + (\sigma_{yp})_o \ln \frac{c}{b} \quad (b)$$

(CONT.)

12.43 (CONT.)

From Eqs. (a) and (b), after eliminating p_b , we obtain

$$\begin{aligned} p_u &= (\sigma_{yp})_i \ln \frac{b}{a} + (\sigma_{yp})_o \ln \frac{c}{b} \\ &= 280 \ln \frac{30}{20} + 400 \ln \frac{50}{30} \\ &= 317.9 \text{ MPa} \end{aligned}$$



SOLUTION (12.44)

(a) Equation (12.60):

$$p_c = k\sigma_{yp} \frac{\frac{3^2 - 2^2}{2(3)^2}}{2} = 0.2778k\sigma_{yp}$$



(b) Equation (12.61a):

$$(\sigma_r)_{r=a} = k\sigma_{yp} [\ln \frac{1}{2} - 0.2778] = -0.9709k\sigma_{yp}$$



(c) Equation (12.59b):

$$(\sigma_\theta)_{r=b} = \frac{0.2778k\sigma_{yp}(3^2)}{3^2 - 2^2} \left(1 + \frac{3^2}{3^2}\right) = 0.444k\sigma_{yp}$$



Equation (12.59b):

$$(\sigma_\theta)_{r=c} = \frac{0.2778k\sigma_{yp}(3^2)}{3^2 - 2^2} \left(1 + \frac{3^2}{2^2}\right) = 0.7222k\sigma_{yp}$$



Equation (12.61b):

$$(\sigma_\theta)_{r=a} = k\sigma_{yp} (1 + \ln \frac{1}{2} - 0.2778) = 0.0291k\sigma_{yp}$$




We see from these results that the maximum stress occurs at the elastic-plastic boundary.

End of Chapter 12

CHAPTER 13

SOLUTION (13.1)

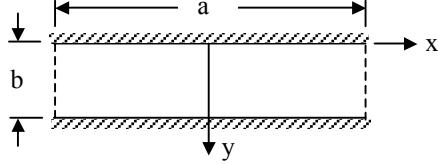

(a) Boundary conditions at $y=0$ and $y=b$:

$$w = 0 \quad \frac{dw}{dy} = 0 \quad (a)$$

We have

$$w'''' = \frac{p_0}{D} \quad w'' = \frac{p_0 y^2}{2D} + c_1 y + c_2$$

$$w' = \frac{p_0 y^3}{6D} + \frac{1}{2} c_1 y^2 + c_2 y + c_3$$

$$w = \frac{p_0 y^4}{24D} + \frac{c_1 y^3}{6} + \frac{c_2 y^2}{2} + c_3 y + c_4$$

Conditions (a) yield $c_4 = 0$, $c_3 = 0$,

$$c_1 = -\frac{p_0 b}{2D} \quad c_2 = \frac{p_0 b^2}{12D}$$

$$\text{Thus, } w = \frac{p_0 b^4}{24D} \left[\left(\frac{y}{b}\right)^4 - 2\left(\frac{y}{b}\right)^3 + \left(\frac{y}{b}\right)^2 \right] \quad \blacktriangleleft$$

(b) Differentiating twice the foregoing expression, we have

$$w'' = \frac{p_0 b^4}{24D} \left[\frac{12}{b^4} y^2 - \frac{12}{b^3} y + \frac{2}{b^2} \right]$$

For $y = \frac{b}{2}$:

$$\frac{d^2 w}{dy^2} = -\frac{p_0 b^2}{24D}$$

$$\text{Hence, } M_y = \frac{p_0 b^4}{24}$$

$$\text{Thus, } \sigma_{y,\max} = \frac{p_0}{4} \left(\frac{b}{t}\right)^2, \quad \sigma_{x,\max} = \frac{p_0}{12} \left(\frac{b}{t}\right)^2$$

Similarly, for $y=0$:

$$\frac{d^2 w}{dy^2} = -\frac{p_0 b^2}{12D}, \quad M_y = \frac{p_0 b^2}{12}$$

$$\text{and } \sigma_{y,\max} = \frac{1}{2} p_0 \left(\frac{b}{t}\right)^2 = \sigma_{\max}$$

$$\sigma_{x,\max} = \frac{1}{6} p_0 \left(\frac{b}{t}\right)^2 \quad \blacktriangleleft$$

SOLUTION (13.2)

We have $r_x = r$, $r_y = \infty$

$$\text{and } r = 0.12 \text{ m}, \quad t = 0.3(10^{-3}) \text{ m}$$

Equation (13.3b):

$$\varepsilon_{\max} = \frac{t}{2r} = \frac{0.3}{2(0.12)} = 1250 \text{ } \mu$$

Equation (13.5):

$$\sigma_{\max} = -\frac{Et}{2(1-\nu^2)r} = -\frac{200 \times 10^9 (0.3)}{2(0.91)120} = 274.7 \text{ MPa} \quad \blacktriangleleft$$

SOLUTION (13.3)

Using Eq. (13.8),

$$D = \frac{9(200 \times 10^9)(0.012)^3}{12(8)} = 32,400$$

From Example 13.1:

$$w = \left(\frac{b}{\pi}\right)^4 \frac{p_0}{D} \sin\left(\frac{\pi y}{b}\right)$$

$$w_{\max} = \left(\frac{0.6}{\pi}\right)^4 \frac{20 \times 10^3}{32,400} = 0.82(10^{-3}) \text{ m} = 0.82 \text{ mm}$$

$$M_y = -D \frac{d^2 w}{dy^2} = -\left(\frac{b}{\pi}\right)^2 p_0 \sin \frac{\pi y}{b}$$

Thus,

$$\begin{aligned} \sigma_{y,\max} &= \frac{6M_{y,\max}}{t^2} = 0.61p_0\left(\frac{b}{t}\right)^2 \\ &= 0.61p_0(20 \times 10^3)\left(\frac{0.6}{0.012}\right)^2 = 30.4 \text{ MPa} \end{aligned}$$


$$\sigma_{x,\max} = \nu(30.4) = 10.13 \text{ MPa}$$

Then,

$$\begin{aligned} \varepsilon_{y,\max} &= \frac{1}{E}(\sigma_{y,\max} - \nu\sigma_{x,\max}) \\ &= \frac{1}{200 \times 10^3}(30.4 - \frac{10.13}{3}) = 135 \mu \end{aligned}$$

and

$$r_y = \frac{t}{2\varepsilon_{y,\max}} = \frac{0.012 \times 10^6}{2(135)} = 44.41 \text{ m}$$

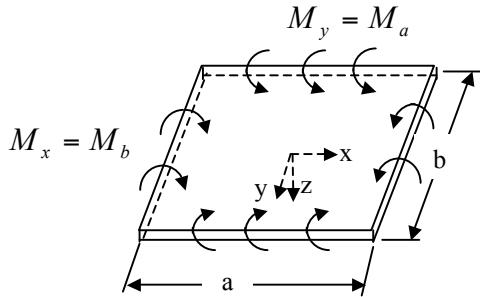SOLUTION (13.4)


(a) Using Eq. (13.7),

$$\begin{aligned} \frac{\partial^2 w}{\partial x^2} &= -\frac{M_b - \nu M_a}{D(1-\nu^2)} \\ \frac{\partial^2 w}{\partial y^2} &= -\frac{M_a - \nu M_b}{D(1-\nu^2)}, \quad \frac{\partial^2 w}{\partial x \partial y} = 0 \end{aligned} \tag{a}$$

Integrating these equations,

$$w = -\frac{M_b - \nu M_a}{2D(1-\nu^2)} x^2 - \frac{M_a - \nu M_b}{2D(1-\nu^2)} y^2 + c_1 x + c_2 y + c_3$$

If the origin of xyz is located at the center and midplane of the plate, the c's will vanish, and

$$w = -\frac{M_b - \nu M_a}{2D(1-\nu^2)} x^2 - \frac{M_a - \nu M_b}{2D(1-\nu^2)} y^2 \tag{b}$$

(b) By setting $M_a = -M_b$ in Eq. (a):

$$\frac{\partial^2 w}{\partial x^2} = -\frac{\partial^2 w}{\partial y^2} = \frac{M_a}{D(1-\nu)} = \frac{1}{r_x} = -\frac{1}{r_y}$$

Integrating and locating the origin of xyz, as in item (a):

$$w = \frac{M_a}{2D(1-\nu)} (x^2 - y^2)$$

SOLUTION (13.5)

Equation (13.19) becomes,

$$p_{mn} = \frac{144P}{a^4 b^4} \int_0^a \left[\int_0^b (b-y) \sin \frac{n\pi y}{b} dy \right] (a-x) \sin \frac{m\pi x}{a} dx$$

Integrating by parts,

$$p_{mn} = \frac{144P}{a^4 b^4} \frac{b^2}{n\pi} \frac{a^2}{m\pi} = \frac{144P}{mn\pi^2 a^2 b^2} \quad (a)$$

Substituting Eqs. (13.18) into $\nabla^4 w = p/D$:

$$a_{mn} = \frac{p_{mn}}{\pi^4 D (m^2/a^2 + n^2/b^2)^2} \quad (b)$$

Inserting Eqs. (a) and (b) into Eq. (13.18b), we find the required expression for the deflection.

SOLUTION (13.6)

(a) From Eq. (13.19), we obtain

$$p_{mn} = p_0$$

Then, Eq. (13.20) becomes for a square plate ($a=b$):

$$w = \frac{p_0 a^4}{\pi^4 D} \sum \sum \frac{\sin \frac{m\pi x}{a} \sin \frac{n\pi y}{b}}{(m^2 + n^2)^2} \quad (a)$$

At $x = y = a/2$,

$$w_{\max} = \frac{p_0 a^4}{\pi^4 D} \sum \sum \frac{(-1)^{\frac{m+n-1}{2}}}{(m^2 + n^2)^2}$$

$$(b) D = \frac{210 \times 10^9 (0.025)^3}{12(1-0.3^2)} = 300,480.77$$

Equation (a) is then,

$$8(10^{-3}) = \frac{p_0 (3)^4}{\pi^4 (300,480.77)} \left[\frac{1}{4} - \frac{1}{100} \right]$$

or $p_0 = 12.05 \text{ kPa}$

SOLUTION (13.7)

The flexural rigidity of the plate is

$$D = \frac{Et^3}{12(1-\nu^2)} = \frac{200 \times 10^9 t^3}{12(1-0.09)} = 18.315 \times 10^9 t^3$$


The maximum deflection occurs at the center of the plate. Equation (13.27) is thus

$$w_{\max} = \frac{p_0 a^4}{64 D}; \quad 1.5 \times 10^{-3} = \frac{10(10^6)(0.05)^4}{64(18.315 \times 10^9 t^3)}$$

Solving,

$$t = 3.29(10^{-3}) \text{ m} = 3.29 \text{ mm}$$

SOLUTION (13.8)

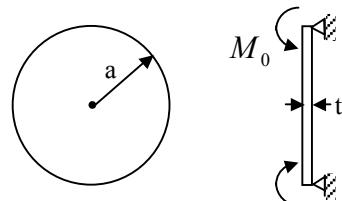

(CONT.)

12.8 (CONT.)

Since $Q = 0$, Eq. (13.24c) becomes

$$\frac{d}{dr} \left[\frac{1}{r} \frac{d}{dr} (r \frac{dw}{dr}) \right] = 0$$

from which, after integration,

$$w = -\frac{c_1 r^2}{4} - c_2 \ln \frac{r}{a} + c_3 \quad (a)$$

Substituting this into Eq. (13.24a):

$$M_r = D \left[\frac{c_1}{2} - \frac{c_2}{r^2} + \nu \left(\frac{c_1}{2} + \frac{c_2}{r^2} \right) \right] \quad (b)$$

Boundary conditions

$$(M_r)_{r=a} = M_0 \quad w(0) = 0 \quad (\frac{dw}{dr})_{r=0} = 0$$

yield $c_2 = 0$ and

$$c_1 = \frac{2M_0}{D(1+\nu)} \quad c_3 = \frac{M_0 a^2}{2D(1+\nu)}$$

Equation (a) becomes then,

$$w = \frac{M_0}{2D(1+\nu)} (a^2 - r^2) \quad \blacktriangleleft$$

Introducing this into Eqs. (13.24a) and (13.24b) yields $M_r = M_\theta = M_0$.

$$\text{Hence, } \sigma_{r,\max} = \sigma_{\theta,\max} = \frac{6M_0}{t^2} \quad \blacktriangleleft$$

SOLUTION (13.9)

We have $Q_r = 0$ and Eq. (13.24c) after integration gives

$$w = -\frac{c_1 r^2}{4} - c_2 \ln \frac{r}{a} + c_3 \quad (a)$$

Introducing this into Eq. (13.24a):

$$M_r = D \left[\frac{c_1}{2} - \frac{c_2}{r^2} + \nu \left(\frac{c_1}{2} + \frac{c_2}{r^2} \right) \right] \quad (b)$$

Boundary conditions

$$w(a) = 0 \quad M_r(b) = M_0$$

and Eqs. (a) and (b) result in

$$c_1 = \frac{2b^2 M_0}{(1+\nu)(b^2 - a^2)}, \quad c_2 = \frac{a^2 b^2 M_0}{(1-\nu)(b^2 - a^2)} \quad c_3 = \frac{a^2 b^2 M_0}{2(1+\nu)D(a^2 - b^2)}$$

Carrying these into Eq. (a), we have the equation for deflection.

SOLUTION (13.10)

From Example 13.3:

$$\sigma_1 = \sigma_{r,\max} = -\frac{3}{4} p_0 \left(\frac{a}{t} \right)^2, \quad \sigma_2 = -\frac{1}{4} p_0 \left(\frac{a}{t} \right)^2, \quad \sigma_3 = 0$$

Maximum shearing stress is then

$$\tau_{\max} = \frac{1}{2} (\sigma_1 - 0) = -\frac{3}{8} p_0 \left(\frac{a}{t} \right)^2$$


According to maximum shear stress theory:

$$\frac{\sigma_{yp}}{n} = \frac{3}{4} p_0 \left(\frac{a}{t} \right)^2$$

Introducing the given data,

$$\frac{100(10^6)}{n} = (0.4 \times 10^6) \left(\frac{0.2}{0.02} \right)^2 \left(\frac{3}{4} \right)$$

$$\text{or } n = 3.33 \quad \blacktriangleleft$$

SOLUTION (13.11)


Solution proceeds as in Example 13.3. Boundary conditions are

$$(w)_{r=a} = 0 \quad (M_r)_{r=a} = 0 \quad (\text{a})$$

We have

$$\frac{D}{p} w = \frac{r^4}{64} - \frac{c_2 r^2}{4} + c_4 \quad (\text{b})$$

Carrying Eqs. (a) and (b) into Eq. (13.24a), we obtain two equations.

From these c_2 and c_4 are evaluated. In so doing, and substituting the values obtained into Eq. (b):

$$w = \frac{p(a^2 - r^2)}{64D} \left(\frac{5+\nu}{1+\nu} a^2 - r^2 \right)$$



SOLUTION (13.12)

Let $r = r_y = \partial^2 w / \partial y^2$, then $r_x = r_{xy} = \infty$, $M = M_y$, $M_x = M_{xy} = 0$

Hence, Eq.(13.5), for $z = -\gamma z$:

$$\sigma_{\max} = \frac{E t}{2(1-\nu^2)r}; \quad 120(10^6) = \frac{70(10^9)(0.006)}{2(0.91)r}, \quad \text{or} \quad r = 1.923 \text{ m}, \quad d = 3.85 \text{ m}$$



Equation (13.9),

$$120(10^6) = \frac{6M_{\max}}{t^2} = \frac{6M_{\max}}{(0.006)^2}; \quad M_{\max} = 320N$$



SOLUTION (13.13)

$$(a) \quad D w^{IV} = p_0, \quad D w''' = p_0 y + c_1, \quad D w'' = \frac{1}{2} p_0 y^2 + c_1 y + c_2 \\ D w' = \frac{1}{6} p_0 y^3 + \frac{1}{2} c_1 y^2 + c_2 y + c_3$$

and

$$D w = \frac{1}{24} p_0 y^4 + \frac{1}{6} c_1 y^3 + \frac{1}{2} c_2 y^2 + c_3 y + c_4 \quad (\text{a})$$

Boundary conditions:

$$w(0) = 0; \quad c_4 = 0, \quad w''(0) = 0; \quad c_2 = 0$$

$$w(b) = 0; \quad \frac{p_0 b^4}{24} + \frac{b^3}{6} c_1 + c_3 b = 0$$

$$w'(b) = 0; \quad \frac{p_0 b^3}{6} + \frac{b^2}{2} c_1 + c_3 = 0$$

Solving, $c_1 = -\frac{3}{8}b$ $c_3 = \frac{b^3}{48}$

Equation (a) is thus

$$w = \frac{p_0 b^4}{48D} \left[\left(\frac{y}{b} \right)^4 - 3 \left(\frac{y}{b} \right)^3 + 2 \left(\frac{y}{b} \right)^4 \right] \quad (\text{b})$$




(b) We have

$$\frac{dw}{dy} = \frac{p_0 b^4}{24D} \left[\frac{4y^3}{b^4} - \frac{9y^2}{2b^3} + \frac{1}{2b} \right], \quad \frac{d^2 w}{dy^2} = \frac{p_0}{2D} \left[y^2 - \frac{3yb}{4} \right]$$

At $y = b$:

$$M_{\max} = -D \frac{d^2 w}{dy^2} = -p_0 \frac{b^2}{8}, \quad \sigma_{y,\max} = \frac{6M_{\max}}{t^2} = -0.75 p_0 \left(\frac{b}{t} \right)^2$$

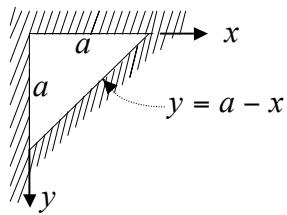

SOLUTION (13.14)


$$\text{Let } W = 1 - \frac{x}{a} - \frac{y}{a}.$$

$$\text{Then } w = cx^2 y^2 W.$$

$$\frac{\partial w}{\partial x} = 2cxy^2 W^2 + 2cx^2 y^2 W(-\frac{1}{a})$$

$$\frac{\partial^2 w}{\partial x^2} = 4cxyW + 4cxy^2 W(-\frac{1}{a}) + 4cx^2 y(-\frac{1}{a}) + 2cx^2 y^2 W^{-1}(-\frac{1}{a})$$

$$\frac{\partial w}{\partial y} = 2cx^2 yW + 2cx^2 y^2 W(-\frac{1}{a})$$

$$\frac{\partial^2 w}{\partial x^2} = 2cy^2 W^2 + 4cxy^2 W(-\frac{1}{a}) + 4cxy^2 (-\frac{1}{a}) + 2cx^2 y^2 W^{-1}(-\frac{1}{a})^2$$

$$\frac{\partial^2 w}{\partial y^2} = 2cx^2 W^2 + 4cx^2 yW(-\frac{1}{a}) + 4cx^2 y(-\frac{1}{a}) + 4cx^2 y^2 W^{-1}(-\frac{1}{a})^2$$

$$(a) \text{ At } x=0: \quad w=0, \quad \frac{\partial w}{\partial x} = 0$$

$$\text{At } y=0: \quad w=0, \quad \frac{\partial w}{\partial y} = 0$$

$$\text{At } y=a-x: \quad w=0, \quad \frac{\partial w}{\partial x} = 0, \quad \frac{\partial w}{\partial y} = 0$$

$$(b) \text{ At } x=0, y=a:$$

$$\sigma_y = -\frac{Et}{2(1-\nu^2)} \left[\frac{\partial^2 w}{\partial y^2} + \nu \frac{\partial^2 w}{\partial x^2} \right] = \dots = 0, \quad \tau_{xy} = \frac{E}{2(1+\nu)} \frac{\partial^2 w}{\partial x \partial y} = \dots = 0 \quad \blacktriangleleft$$

$$\text{At } y=0, \quad x = \frac{a}{2}: \quad \frac{\partial^2 w}{\partial y^2} = \frac{ca^2}{8}, \quad \frac{\partial^2 w}{\partial x^2} = 0, \quad \frac{\partial^2 w}{\partial x \partial y} = 0$$

$$\text{and} \quad \sigma_{y,\max} = -\frac{Et}{2(1-\nu^2)} \left[\frac{ca^2}{8} \right] = -\frac{Ecta^2}{16(1-\nu^2)}, \quad \tau_{xy} = 0 \quad \blacktriangleleft$$

SOLUTION (13.15)

We have

$$M_{xy} = -D(1-\nu) \frac{\partial^2 w}{\partial x \partial y} = M_0$$

$$\text{Let,} \quad \frac{\partial^2 w}{\partial x \partial y} = \frac{-M_0}{D(1-\nu)} = k$$

Integrating with respect to x :

$$\frac{\partial w}{\partial y} = kx + f(y) + c_1$$

Then, integrating the above with respect to y gives

$$w = kxy + \int f_1(y) dy + c_2 \quad \text{where } f_1(y) = f(y) + c_1$$

Due to the symmetry in deflection: $\int f_1(y) dy = 0$.

Also, owing to the symmetry, center $(a/2, a/2)$ should be free of displacement,

$$w = 0 = \frac{1}{4}ka^2 + c_2 \quad \therefore c_2 = -\frac{1}{4}ka^2$$

It follows that

$$w = -\frac{M_0}{D(1-\nu)} \left(xy - \frac{a^2}{4} \right) \quad \blacktriangleleft$$

We observe that this solution satisfies boundary conditions, $M_x = 0$ and $M_y = 0$ at plate edges.

SOLUTION (13.16)

Cylinder end can be approximated as a clamped edge plate subjected to uniform loading.

(a) Equation (13.29),

$$\sigma_{r,\max} = \frac{3p_0}{4} \left(\frac{a}{t}\right)^2; \quad \left(\frac{a}{t}\right)^2 = \frac{135(10^6) \times 4}{3 \times 1.5(10^6)} = 120$$

or $a/t=10.954$. Hence,

$$t = \frac{200}{10.954} = 18.26 \text{ mm}$$

(b) Then, Eq.(13.27) for $r=0$, gives

$$w_{\max} = \frac{p_0 a^4}{64D} = \frac{1.5 \times 10^6 (0.2)^4 \times 12(1-0.3^2)}{64 \times 200 \times 10^9 (0.01826)^3} = 0.336 \text{ mm}$$
 ◀

SOLUTION (13.17)

(a) From Eq. (13.29):

$$\sigma_{\max} = \frac{3}{4} p_0 \left(\frac{a}{t}\right)^2 = \frac{3}{4} p_{yp} \left(\frac{125}{10}\right)^2 = 117.19 \sigma_{yp}$$

Setting $\sigma_{\max} = p_{yp}$

$$p_{yp} = \frac{\sigma_{yp}}{117.19} = \frac{345}{117.19} = 2.944 \text{ MPa}$$

$$\text{We have } D = \frac{Et^3}{12(1-\nu^2)} = \frac{200(10^9)(0.01)^3}{12(1-0.3^2)} = 18.315 \text{ kPa}$$

Eq. (13.27) for $r=0$ is then

$$w_{\max} = \frac{p_{yp} a^4}{64D} = \frac{2.944(10^6)(0.125)^4}{64(18.315 \times 10^3)} = 0.613 \text{ mm}$$
 ◀

$$(b) p_{allow} = \frac{p_{yp}}{n} = \frac{2.944}{1.2} = 2.45 \text{ MPa}$$
 ◀

SOLUTION (13.18)

Referring to Example 13.2:

$$\sigma_{\max} = \frac{6M_{\max}}{t^2} = 6(0.0534 p_0) \left(\frac{50}{2}\right)^2$$

$$\text{Thus, } 240(10^6) = 200.25 p_0$$

$$\text{or } p_0 = 1.2 \text{ MPa}$$
 ◀

Similarly,

$$\begin{aligned} w_{\max} &= 0.0454 p_0 \frac{a^4}{Et^3} = 0.0454(1.2 \times 10^6) \frac{(0.5)^4}{70 \times 10^9 (0.02)^3} \\ &= 0.0608 \text{ m} = 6.1 \text{ mm} \end{aligned}$$
 ◀

SOLUTION (13.19)

We observe that

$$\int_0^a \sin \frac{m\pi x}{a} \sin \frac{n\pi x}{a} dx = \int_0^b \sin \frac{n\pi y}{b} \sin \frac{n\pi y}{b} dy = 0$$

if $m \neq m'$ and $n \neq n'$. Therefore, integrating, we consider only the squares of the terms in the parenthesis in Eq. (b) of Sec. 13.9. Using the formula:

(CONT.)

12.19 (CONT.)

$$\int_0^a \int_0^b \sin^2 \frac{m\pi x}{a} \sin^2 \frac{n\pi y}{b} dx dy = \frac{ab}{4}$$

calculation of the first term of the integral in Eq. (b) gives

$$\frac{\pi^4 abD}{8} \sum_m^{\infty} \sum_n^{\infty} a_{mn}^2 \left(\frac{m^2}{a^2} + \frac{n^2}{b^2} \right)^2$$

Also, the second term of the integral in Eq. (b):

$$\begin{aligned} p_0 \int_0^a \int_0^b a_{mn} \sin \frac{m\pi x}{a} \sin \frac{n\pi y}{b} dx dy \\ = \frac{p_0 ab}{\pi^2 mn} a_{mn} (1 - \cos m\pi)(1 - \cos n\pi) \\ = \frac{4p_0 ab}{\pi^2 mn} a_{mn} \quad (m, n = 1, 3, \dots) \end{aligned}$$



SOLUTION (13.20)

Deflection is given by Eq. (13.18b). Loading is expressed as follows:

$$\begin{aligned} p &= 2p_0 \frac{x}{a} & 0 \leq x \leq \frac{a}{2} \\ p &= 2p_0 - 2p_0 \frac{x}{a} & \frac{a}{2} \leq x \leq a \end{aligned} \tag{a}$$

Potential energy, Eq. (13.33):

$$\begin{aligned} W &= 2 \sum \sum \int_0^{a/2} \int_0^a \frac{2p_0 x}{a} \sin \frac{m\pi x}{a} \sin \frac{n\pi y}{a} dx dy \\ &= \sum \sum \frac{8p_0 a^2}{m^2 n \pi^3} a_{mn} \sin \frac{m\pi}{2} \end{aligned} \tag{b}$$

Strain energy, Eq. (13.32):

$$\begin{aligned} U &= \frac{D}{2} \int_0^a \int_0^a [a_{mn} \left(\frac{m^2 \pi^2}{a^2} + \frac{n^2 \pi^2}{b^2} \right) \sin \frac{m\pi x}{a} \sin \frac{n\pi y}{a}]^2 dx dy \\ &= \frac{1}{8} D \pi^4 a^2 \sum \sum a_{mn}^2 \left(\frac{m^2}{a^2} + \frac{n^2}{a^2} \right)^2 \end{aligned}$$

We thus have

$$\frac{\partial \Pi}{\partial a_{mn}} = \frac{D \pi^4 a^2}{4} a_{mn} \left(\frac{m^2}{a^2} + \frac{n^2}{a^2} \right)^2 - \frac{8p_0 a^2}{m^2 n \pi^3} \sin \frac{m\pi}{2} = 0$$

or

$$a_{mn} = \frac{32 p_0 a^4 \sin(m\pi/2)}{m^2 n \pi^7 D (m^2 + n^2)^2} \quad (m, n = 1, 3, \dots) \tag{c}$$

Substitute this into Eq. (13.18b) to obtain deflection.

SOLUTION (13.21)

Let p represent the pressure differential.

Cylinder:

$$\sigma_{\theta} = \frac{ap}{t} \quad \text{or} \quad \sigma_{\theta} = \frac{150p}{6} = 25p$$

From the above, $p = \sigma_{\theta} / 25 = 15 \times 10^6 / 25 = 600 \text{ kPa}$



Sphere:

$$\sigma = \frac{pa}{2t} = 12.5p$$

Thus,


$$p = \sigma / 12.5 = 15 \times 10^6 / 12.5 = 1.2 \text{ MPa}$$

SOLUTION (13.22)

$$p = \frac{2t\sigma_{all}}{r} = \frac{2(0.05)(30 \times 10^6)/2}{2.5 \times 12} = 1.5 \text{ MPa}$$

We have

$$9.81(10^3)h = 1.5 \times 10^6, \quad h = 152.9 \text{ m}$$
 ◀

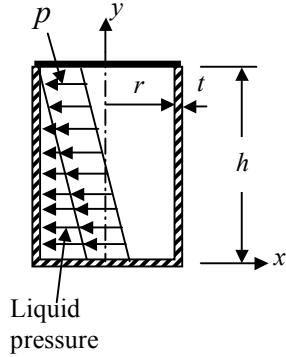SOLUTION (13.23)

Total pressure at any depth:

$$p = 500(10^3) + \gamma(h - y)$$

(a) At $y = h$:

$$p = 500(10^3) \text{ Pa}$$

Therefore,

$$t = \frac{pr}{\sigma_{all}} = \frac{500(10^3)4000}{180(10^6)} = 11.11 \text{ mm}$$
 ◀

(b) At $y = h/4$:

$$p = 500(10^3) + 15(10^3)(13.5) = 702.5(10^3) \text{ Pa}$$

$$t = \frac{702.5(10^3)4000}{180(10^6)} = 15.6 \text{ mm}$$
 ◀

(c) At $y = 0$:

$$p = 500(10^3) + 15(10^3)(18) = 770(10^3) \text{ Pa}$$

$$t = \frac{770(10^3)4000}{180(10^6)} = 17.1 \text{ mm}$$
 ◀

SOLUTION (13.24)

Total pressure at any depth:

$$p = 200(10^3) + \gamma(h - y)$$

(a) At $y = h$:

$$p = 200(10^3) \text{ Pa}$$

$$t = \frac{pr}{\sigma_{all}} = \frac{200(10^3)4000}{180 \times 10^6} = 4.44 \text{ mm}$$
 ◀

(CONT.)

12.24 (CONT.)

(b) At $y = h/4$:

$$p = 200(10^3) + 15(10^3)(13.5) = 402.5(10^3) \text{ Pa}$$

$$t = \frac{402.5(10^3)4000}{180 \times 10^6} = 8.94 \text{ mm} \quad \blacktriangleleft$$

(c) At $y = 0$:

$$p = 200(10^3) + 15(10^3)18 = 470(10^3) \text{ Pa}$$

$$t = \frac{470(10^3)4000}{180 \times 10^6} = 10.4 \text{ mm} \quad \blacktriangleleft$$

SOLUTION (13.25)

The thickness for circumferential stress:

$$t = \frac{pr}{\sigma_{all}} = \frac{1.2(10^3)(0.6)}{24.0/2.4} = 12 \text{ mm}$$

The thickness for axial stress:

$$t = \frac{pr}{2\sigma_{all}} = \frac{12}{2} = 6 \text{ mm}$$

Thus, $t_{req} = 12 \text{ mm}$ ◀

SOLUTION (13.26)

$$\sigma_\theta = \frac{pr}{t} \quad p = \gamma h$$

$$t_{req} = \frac{pr}{\sigma_{all}} = \frac{\gamma hr}{\sigma_{all}} = \frac{9.81(10^3)(150)(400)}{120(10^6)/1.8} = 8.83 \text{ mm} \quad \blacktriangleleft$$

SOLUTION (13.27)


$$t_{req} = \frac{pr}{\sigma_{all}} = \frac{\gamma hr}{\sigma_{all}} = \frac{9.81(10^3)(150)(400)}{100(10^6)} = 5.89 \text{ mm} \quad \blacktriangleleft$$

SOLUTION (13.28)

$$(a) \tau_{max} = \frac{\sigma_1 - \sigma_2}{2} = \frac{1}{2} \left(\frac{pr}{t} - \frac{pr}{2t} \right) = \frac{pr}{4t} = \frac{pd}{8t}$$

$$d = \frac{8t\tau_{max}}{p} = \frac{8 \times 12 \times 35 \times 10^6}{10 \times 10^6} = 336 \text{ mm} \quad \blacktriangleleft$$

$$(b) \sigma_1 = \frac{pr}{t} = \frac{10 \times 10^6 \times 168}{12} = 140 \text{ MPa} \quad \blacktriangleleft$$

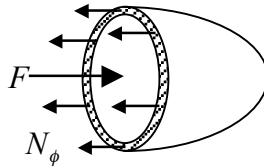SOLUTION (13.29)


The given numerical values are:

$$r_\phi = 180 - 1 = 179 \text{ mm}$$

$$r_\theta = 80 - 1 = 79 \text{ mm} \quad r_i = 80 - 2 = 78$$

$$p = -0.08 \text{ MPa} \quad F = \pi r_i^2 p$$

Equation (13.46b) is therefore

$$\begin{aligned} N_\phi &= \frac{F}{2\pi r_\theta (1)} = \frac{\pi(0.078)^2(0.08 \times 10^6)}{2\pi(0.079)} \\ &= 3.081 \text{ kN/m} \end{aligned}$$

and


$$\sigma_\phi = \frac{3081}{0.002} = 1.541 \text{ MPa}$$

Using Eq. (13.46a),

$$\frac{\sigma_\theta}{0.079} + \frac{1.541}{0.179} = \frac{0.08}{0.02}$$

or

$$\sigma_\theta = 2.48 \text{ MPa} = \sigma_{\max}$$

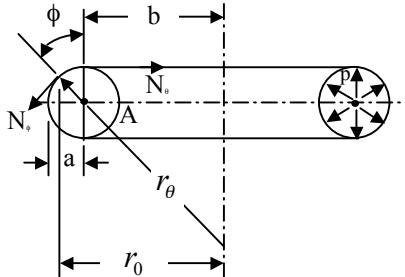SOLUTION (13.30)


Consider the portion of shell defined by ϕ . Vertical equilibrium of force yields,

$$2\pi r_0 N_\phi \sin \phi = \pi p(r_0^2 - b^2)$$

from which

$$N_\phi = \frac{p(r_0^2 - b^2)}{2r_0 \sin \phi} = \frac{pa(r_0 + b)}{2r_0}$$

or

$$N_\phi = \frac{pa}{b + a \sin \phi} \left(\frac{a}{2} \sin \phi + b \right)$$

Substituting N_ϕ into Eq. (13.46a), setting $p_z = -p$, and $r_\phi = a$:

$$N_\theta = \frac{pr_\theta(r_0 - b)}{2r_0} = \frac{pa}{2}$$

Since $\sin \phi = r_0 / r_\theta = (r_0 - b) / a$, from symmetry.

Note that N_θ is constant throughout the shell from the condition of symmetry.

SOLUTION (13.31)

Referring to Solution of Prob. 13.30, we have

$$2a = (1 - 0.7)/2, \quad a = 0.075 \text{ m}$$

$$2b = (1 + 0.7)/2, \quad b = 0.425 \text{ m}$$

At point A (crotch):

$$\sigma_A = \sigma_{\phi,\max} = pa(r_0 + b)/(2r_0 t)$$

or

$$\begin{aligned} t &= pa(r_0 + b)/(2r_0 \sigma_{\phi,\max}) \\ &= \frac{2(10^6)(0.075)(0.35+0.425)}{2(0.35)(210 \times 10^6)} \\ &= 0.791 \text{ mm} = t_{req.} \end{aligned}$$




Similarly,

$$\sigma_\theta = \frac{pa}{2t}$$

or

$$t = \frac{2(10^6)75}{2(210 \times 10^6)} = 0.357 \text{ mm}$$

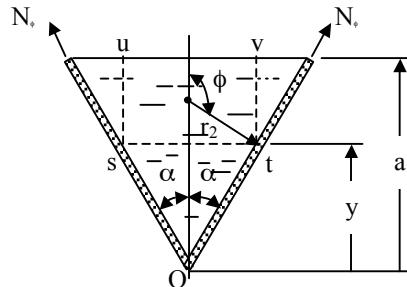SOLUTION (13.32)


Pressure at any level st is $p_r = \gamma(a - y)$. We have

$$\phi = \frac{\pi}{2} + \alpha \quad r_0 = y \tan \alpha$$

Thus, the first of Eqs. (13.49) becomes

$$N_\theta = \frac{\gamma(a-y)y \tan \alpha}{\cos \alpha}$$

and

$$\sigma_\theta = \frac{\gamma(a-y)y \tan \alpha}{t}$$



The load F is equal to the weight of liquid in cylindrical portion $stuv$:

$$F = -\pi y^2 (a - y + \frac{y}{3}) \tan^2 \alpha$$

Then second of Eqs. (13.49) gives

$$N_\phi = \gamma y (a - \frac{2}{3} y) \tan \alpha / 2 \cos \alpha$$

and

$$\sigma_\phi = \frac{\gamma y (a - 2y/3) \tan \alpha}{2t} / \cos \alpha$$



SOLUTION (13.33)

Expressions for the components of pressure are:

$$p_\theta = -p \cos \theta \quad p_r = p \sin \theta \quad p_x = 0$$

Thus,

$$\begin{aligned} N_{x\theta} &= -\int [-p \cos \theta + \frac{1}{a}(-pa \cos \theta)] dx + f_1(\theta) \\ &= 2px \cos \theta + f_1(\theta) \end{aligned} \tag{a}$$

$$N_\theta = -pa \sin \theta \tag{b}$$

$$\begin{aligned} N_x &= -\int \frac{2}{a}(-px \sin \theta) dx + \frac{df_1}{d\theta} + f_2(\theta) \\ &= \frac{1}{a} px^2 \sin \theta + \frac{df_1}{d\theta} + f_2(\theta) \end{aligned} \tag{c}$$

Boundary conditions: $N_x = 0$ (at $x=0$ and $x=L$) give $f_2 = 0$ and

$$\frac{pL^2}{a} \sin \theta + L \frac{df_1}{d\theta} = 0$$

or

$$f_1(\theta) = -\frac{pL}{2} \sin \theta + c$$

Note that no torque is applied to the shell; $c = 0$. Hence,

$$N_\theta = -pa \sin \theta \quad N_x = -\frac{L-x}{a} px \sin \theta$$

$$N_{x\theta} = -(L-x)p \cos \theta$$



SOLUTION (13.34)

Now the cylinder length does not change:

$$\int_{-L/2}^{L/2} (N_x - vN_\theta) dx = 0$$

Substituting Eqs. (b) of Example 13.7 into this, taking $f_1 = 0$ and integrating the resulting expression, we have

$$f_2(\theta) = v\gamma a^2 (1 - \cos \theta) - \frac{vL^2}{24} \cos \theta$$

Referring to Example 13.7, the solution is thus,

$$N_\theta = \gamma a^2 (1 - \cos \theta) \quad N_{x\theta} = \gamma ax \sin \theta$$

$$N_x = \frac{\gamma x^2}{2} \cos \theta + v\gamma a^2 (1 - \cos \theta) - \frac{vL^2}{24} \cos \theta$$



SOLUTION (13.35)

Referring to Fig. 13.13b:

$$p_x = p \sin \phi \quad p_z = p \cos \phi \quad r_0 = x \cos \phi$$

Stress resultants due to weight:

$$F = 2\pi r \cdot p \sin \phi \cdot rd\phi$$

(CONT.)

13.35 (CONT.)

Since $rd\phi = dx$ and $r = x \cot \phi$. Then

$$F = 2\pi \int_0^x x \cot \phi p \sin \phi dx = 2\pi p \cos \phi \left(\frac{x^2}{2}\right) + c$$

For a cone supported at its edge $c = 0$, since $F = 0$ at $x = 0$. Therefore, Eq. (13.46b) gives

$$N_\phi = -\frac{px}{2 \sin \phi} \quad (1)$$

Equation (13.46a):

$$N_\theta = \frac{p_r r_0}{\sin \phi} = -px \frac{\cos^2 \phi}{\sin \phi} \quad (2)$$

Stress resultants due to pressure:

Equation (13.46a) yields,

$$N_\theta = -p_r \frac{x \cos \phi}{\sin \phi} = -p_r x \cot \phi \quad (3)$$

We now have

$$F = (2\pi p_r \sin \phi r d\phi) \cos \phi$$

Following a procedure similar to that the preceding, we obtain

$$F = 2\pi p_r \cos^2 \phi \left(\frac{x^2}{2}\right)$$

Equation (13.46a) leads to

$$N_\phi = -\frac{p_r x \cos \phi}{2 \sin \phi} = -\frac{1}{2} p_r x \cot \phi \quad (4)$$

Solution is determined by the superposition of the preceding results:
adding Eqs. (4) and (1), and (3) and (2). In so doing, we have

$$N_x = -\frac{x}{2 \sin \phi} (p + p_r \cos \phi) \quad \blacktriangleleft$$

and

$$N_\theta = -x \cot \phi (p \cos \phi + \frac{1}{2} p_r) \quad \blacktriangleleft$$

End of Chapter 13